



PROFESSIONAL-GRADE
ILLUMINATION
TOOLS

SINCE 1973, WE'VE BEEN FOCUSED ON LIGHTING THE WAY IN CHANGE. **WE'LL NEVER STOP.**

For over 45 years, Streamlight has delivered effective, efficient high-performance lighting solutions featuring the latest technology, unmatched performance, unheard of durability and incredible value. We've earned our reputation one customer at a time. And although features or light output may change - our commitment to quality and innovation is the one constant that will always remain the same.





STINGER SERIES

Stinger® 2020 Series	Pg. 11
Stinger LED HL® Series	Pg. 12
Stinger® HPL Series	Pg. 13
Stinger® LED Series	Pg. 14
Ultrastinger® LED	Pg. 15
PolyStinger® Series	Pg. 16
Stinger Accessories	Pg. 17

STRION SERIES

Strion LED HL® Series	Pg. 18
Strion® HPL Series	Pg. 18
Strion® LED Series	Pg. 19
Strion® Accessories	Pg. 19

SL SERIES

SL Series	Pgs. 20-21
-----------	------------

WORKLIGHTS SERIES

Stinger Switchblade® Series	Pgs. 24-25
Strion Switchblade® Series	Pgs. 26-27
Syclone®	Pg. 28
Flipmate®	Pg. 29

LANTERN SERIES

Portable Scene Light Series	Pgs. 32-35
Vulcan® 180 Series	Pgs. 36-37
Fire Vulcan® LED	Pg. 37
E-Flood® LiteBox® // E-Flood® FireBox®	Pg. 38
E-Spot® LiteBox® // E-Spot® FireBox®	Pg. 39
E-Flood HL® LiteBox® HL	Pg. 40
HID LiteBox®	Pg. 40
Lantern Accessories	Pg. 41
Waypoint® Series	Pgs. 42-43
Siege® Series	Pgs. 44-47

RIGHT ANGLE SERIES

Survivor® Series	Pgs. 50-51
Vantage® II	Pg. 52
Vantage® 180 X Series	Pg. 53
Vantage®	Pg. 54
PolyTac 90® X Series	Pg. 55
Knucklehead® Series	Pgs. 56-57

SAFETY-RATED SERIES

Dualie® Series	Pgs. 62-65
ProPolymer® Series	Pgs. 66-71
Knucklehead® HAZ-LO® Series	Pgs. 72-73

WEAPON-MOUNTED SERIES

TLR Full-Size Series	Pgs. 78-89
TLR Series Full-Size Access.	Pgs. 90-91
TLR Sub-Compact Series	Pgs. 92-99
TLR™ RM Series	Pg. 100
ProTac® Rail Mount Series	Pgs. 101-103
TL-Racker® Series	Pgs. 104-105

USB RECHARGEABLE LITHIUM ION BATTERY

SL-B26™ Series	Pgs. 108-109
----------------	--------------

TACTICAL SERIES

ProTac® Series	Pgs. 110-119
PolyTac® Series	Pgs. 120-121
Super Tac® X // TL-2® X	Pg. 122
Scorpion® HL // Scorpion® X	Pg. 123
NightFighter® X	Pg. 123
Sidewinder® Series	Pgs. 124-127

HEADLAMP SERIES

Headlamp Series	Pgs. 132-143
-----------------	--------------

STYLUS SERIES

MicroStream® Series	Pg. 146
MacroStream® Series	Pg. 147
Stylus® Series	Pgs. 149-151
Stylus Reach® Series	Pgs. 152-153

TWIN-TASK SERIES

Twin-Task® Series	Pgs. 154-156
-------------------	--------------

TASK-LIGHT SERIES

Task-Light® Series	Pg. 156
--------------------	---------

SPECIALTY SERIES

Specialty Series	Pg. 157
------------------	---------

STREAMLIGHT JR. SERIES

Streamlight Jr. F-Stop® Series	Pg. 158
Streamlight Jr.® Series	Pg. 159

POCKET LIGHT SERIES

Pocket Lights	Pgs. 160-161
---------------	--------------

LIGHTS FOR A CAUSE SERIES

Lights For A Cause	Pgs. 162-163
--------------------	--------------

STAY CONNECTED WITH US:



#STREAMLIGHTSTRONG

LEADING THE INDUSTRY

WITH THE GREATEST VARIETY OF PROFESSIONAL GRADE LIGHTS:

// NEW



STINGER 2020®
pg. 11



STINGER LED HL®
// DS LED HL®
pg. 12



STINGER HPL®
// DS HPL®
pg. 13



STINGER® LED
// DS LED®
pg. 14



ULTRASTINGER® LED
pg. 15



POLYSTINGER®
LED HAZ-LO®
pg. 16



POLYSTINGER® LED
// DS® LED
pg. 16



STRION LED HL®
// DS HL®
pg. 18



PORTABLE SCENE LIGHT
pg. 32



PORTABLE SCENE LIGHT II
pg. 34



VULCAN® 180
pg. 36



VULCAN® 180 HAZ-LO®
pg. 37

// NEW



FIRE VULCAN® LED
pg. 37



E-FLOOD® LITEBOX®
// FIREBOX®
pg. 38



SUPER SIEGE®
pg. 45



SIEGE® X USB
pg. 45



THE SIEGE®
pg. 46



SIEGE® AA
pg. 47



SURVIVOR®
pg. 51



VANTAGE® II
pg. 52



VANTAGE® 180 X
// USB
pg. 53



VANTAGE®
pg. 54

// NEW



POLYTAC 90® X
// USB
pg. 55



KNUCKLEHEAD®
FLOOD & SPOT
MODELS pg. 57



KNUCKLEHEAD®
HAZ-LO® MODELS
pg. 73



BANDIT® //
BANDIT® PRO
MODELS pgs. 132



QB MODELS
pg. 133

// NEW



ENDURO® PRO USB
MODELS
pg. 134



ENDURO® PRO
MODELS
pg. 135

// NEW



ENDURO® PRO
HAZ-LO®
pg. 135



TWIN-TASK®
HEADLAMP
MODELS pg. 137

// NEW



USB HAZ-LO®
Headlamp pg. 143



MICROSTREAM®
MODELS pg. 146

// NEW



MACROSTREAM®
USB pg. 147



STYLUS PRO®
MODELS
pgs. 149-150



STYLUS®
MODELS pg. 151



STYLUS REACH®
MODELS
pgs. 152-153



TWIN-TASK®
MODELS
pgs. 154-156



TASK-LIGHT®
3AA pg. 156



MULTI OPS®
pg. 157

STREAMLIGHT

PERFORMANCE. PERIOD.



STRION HPL®
// DS HPL®
pg. 18



STRION LED®
// DS®
pg. 19



SL-20L®
pg. 20



SL-20LP®
pg. 21



STINGER
SWITCHBLADE® pg. 25



STRION
SWITCHBLADE® pg. 26



SYCLONE®
pg. 28



FLIPMATE®
pg. 29



E-SPOT® LITEBOX®
//FIREBOX®
pg. 39



E-FLOOD® LITEBOX® HL
pg. 40



HID LITEBOX®
pg. 40



WAYPOINT®
pg. 42



WAYPOINT® 300
pg. 42



DUALIE WAYPOINT®
pg. 43



DUALIE®
RECHARGEABLE
MODELS pg. 62



DUALIE®
2AA
pg. 64



DUALIE®
3AA MODELS
pgs. 65



2AA // 2AAA
PROPOLYMER®
HAZ-LO® MODELS
pg. 66



4AA PROPOLYMER®
MODELS
pgs. 67-68



4AA
PROPOLYMAX®
MODELS
pg. 68



3C PROPOLYMER®
MODELS
pgs. 68-69



3AA PROPOLYMER®
HAZ-LO® pg. 70



3N PROPOLYMER®
LED pg. 71



PROTAC HL®
HEADLAMPS
MODELS pg. 138



DOUBLE CLUTCH™
USB pg. 139



ARGO® MODELS
pg. 140



SEPTOR® MODELS
pg. 141



3AA HAZ-LO®
pg. 141



TRIDENT®
MODELS pg. 142



ENDURO®
pg. 143



NIGHT COM®
MODELS pg. 157



STREAMLIGHT JR.
F-STOP® pg. 158



STREAMLIGHT JR.® LED
MODELS pg. 159



CLIPMATE® USB
pg. 160



NANO LIGHT®
pg. 160



KEYMATE® USB
pg. 161



CLIPMATE®
pg. 161



THE LOGO™
pg. 161

LEADING THE INDUSTRY

WITH THE GREATEST VARIETY OF TACTICAL LIGHTS:

			NEW 	NEW 	NEW 	NEW 			
TLR-8® pg. 78	TLR-8® G pg. 78	TLR-7® pg. 79	TLR-9™ pg. 79	TLR-7® A pg. 80	TLR-8® A pg. 81	TLR-8® A G pg. 81	TLR-2 HL® pg. 82	TLR-2 HL® G pg. 82	TLR-1 HL® pg. 83
			NEW 	NEW 					
TLR-3® pg. 99	TLR-4® pg. 99	TLR-4® G pg. 99	TLR™ RM 1 pg. 101	TLR™ RM 2 pg. 101	PROTAC® RAIL MOUNT 1 pg. 102	PROTAC® RAIL MOUNT 2 pg. 102	PROTAC® RAIL MOUNT HL-X LASER pg. 103		
					NEW 				
PROTAC® HPL USB pg. 112	PROTAC HL® USB pg. 112	PROTAC HL® 3 pg. 113	PROTAC HL® pg. 113	PROTAC® 90 pg. 114	PROTAC® 90 X // USB pg. 115	EPU-5200™ (Light Not Included) pg. 115	PROTAC® 2AA pg. 116		
	NEW 								
POLYTAC® X // USB MODELS pg. 120	POLYTAC 90® X // USB MODELS pg. 120	POLYTAC® pg. 121	POLYTAC® HP pg. 121	SUPER TAC® X pg. 122	TL-2® X pg. 122	SCORPION® HL pg. 123			

STREAMLIGHT

PERFORMANCE. PERIOD.



TLR-1 HPL®
pg. 84



TLR-1®
GAME SPOTTER®
pg. 85



TLR-2® G
pg. 86



TLR-1® S
TLR-1® S
pg. 87



TLR-2® S
TLR-2® S
pg. 87



TLR IR™ MODELS
pg. 88



TLR-VIR® MODELS
pg. 89



TLR-6® MODELS
pgs. 92-97



PROTAC®
RAIL MOUNT HL-X
pg. 103



NEW

TL-RACKER®
MODELS
pg. 105



SL-B26™
BATTERY PACKS
pgs. 108-109



PROTAC® HL-X
// USB MODELS
pg. 110



PROTAC® 2L-X
// USB MODELS
pg. 110



PROTAC HL® 4
pg. 111



PROTAC HL® 5-X
// USB MODELS
pg. 111



PROTAC®
1AAA
pg. 116



PROTAC®
2AAA
pg. 117



PROTAC® EMS
pg. 117



PROTAC®
1L-1AA
pg. 118



PROTAC® 1L
pg. 118



PROTAC® 2L
pg. 118



PROTAC HL®
HEADLAMP
pg. 119



PROTAC HL® USB
HEADLAMP
pg. 119



SCORPION® X
pg. 123



NIGHTFIGHTER® X
pg. 123



SIDEWINDER®
pg. 125



SIDEWINDER®
RESCUE
pg. 125



SIDEWINDER
COMPACT® II
pg. 126



NEW

SIDEWINDER®
BOOT
pg. 127

STINGER, STRION & SL SERIES //

DUTY & UTILITY LIGHTING SPECIALISTS
BECAUSE WORK IS TOUGH ENOUGH WITHOUT
HAVING TO WORRY ABOUT YOUR LIGHTING.

Streamlight Stingers, Strions and SL lights are trusted by LEO, professional mechanics and tradesmen around the world for a simple reason... they're the best. With the performance and features that they need and the durability they can depend on.




STINGER® 2020



STINGER DS® HPL



STRION DS HL®

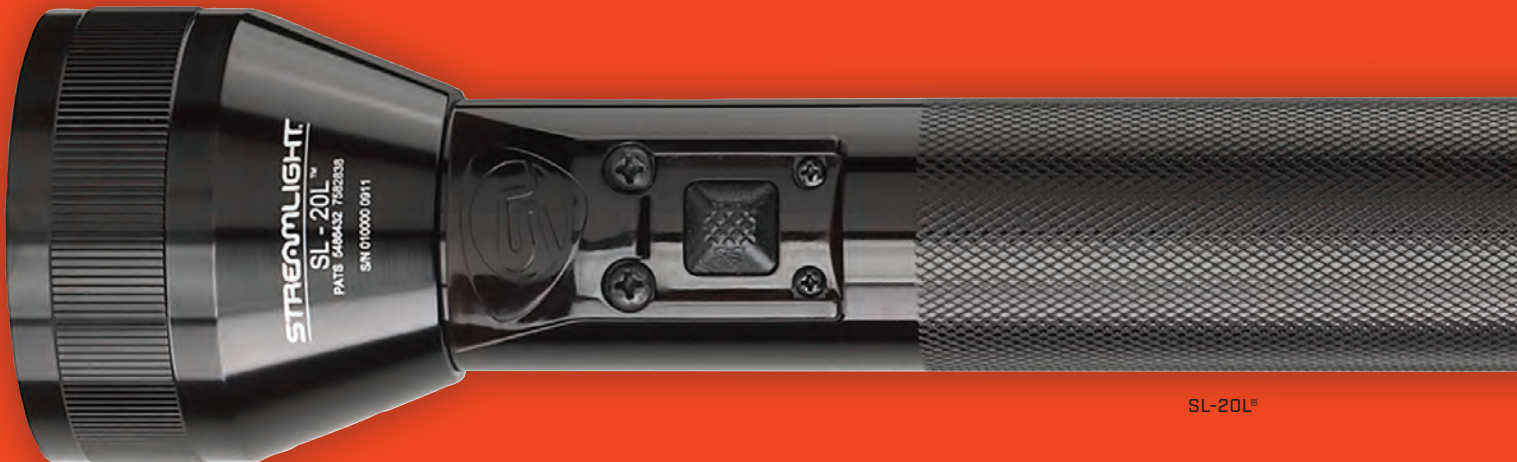

SL-20L®

STREAMLIGHT
STINGER SERIES



THE STINGER 2020.

THE NEXT EVOLUTION IN HIGH-PERFORMANCE FLASHLIGHTS.



STINGER® 2020

The next evolution in high-performance, work-ready flashlights produces 2,000 lumens. Its aluminum alloy body with textured side panels and an anti-roll design is ergonomically shaped for a sure grip. It features dual power switches and an intuitive mode selector switch for ease of use. Select high for brightest light or low for extended run time. A long-lasting SL-B26 USB rechargeable battery pack offers multiple charging options using existing Stinger smart chargers and bank chargers to charge inside the light; use a dual USB cord to charge the battery pack outside the light or a Li-ion battery bank charger to charge multiple batteries at once. IPX7 waterproof to 1m submersion, corrosion-resistant sealed glass lens. TAA Compliant.

	HIGH	MEDIUM	LOW
LUMENS:	2,000	850	100
CANDELA:	26,000	12,000	6,000
DISTANCE:	315m	200m	70m
RUN TIME:	2h	4h	24h

Strobe mode: 3.25 hours of continuous run time

STINGER 2020

BATTERY: (2) SL-B26 Li-Ion USB rechargeable battery packs

SIZE: 7.67" x 1.62"
(19.48 x 4.11 cm)

WEIGHT: 12.3 oz (350 g)

COLOR: Black

STINGER 2020

78101 120V AC/12V DC - 2 holders - Black

78104 12V DC - Black

78100 Without Charger - includes "Y" USB cord - Black



With **[(STROBE)]**
Double tap switch to activate.



Independently functioning head-mounted and tail switches



Mode switch for easy selection of High, Medium or Low



Uses two SL-B26™ protected Li-Ion USB rechargeable battery packs



Optional ring kit includes interchangeable red, blue, purple, orange and lime green face cap rings for easy identification (see page 17)

**STINGER DS LED HL®
STINGER LED HL®**

Everything you love about the Stinger with more lumens for more brightness and a wider beam that lights up a whole area from side to side. Now you'll see the dangers that may be hiding in corners in rooms, tunnels, alleyways, cars, and more.

STINGER DS LED HL

BATTERY: NiMH Rechargeable

DS SIZE: 8.85" x 1.62" x 1.17"
(22.48 x 4.11 x 2.97 cm)

DS WEIGHT: 12.8 OZ (364 g)

COLOR: Black

STINGER LED HL

BATTERY: NiMH Rechargeable

SIZE: 8.41" x 1.62" x 1.17"
(21.36 x 4.11 x 2.97 cm)

WEIGHT: 12.4 OZ (352 g)

COLOR: Black


DS LED HL LED HL

75454	75430	120V AC/12V DC - 2 holders-Black
75455	75431	120V AC - Black
75456	75432	12V DC - Black
75458	75434	120V AC/12V DC - 1 PiggyBack-Black
75453	75429	Without Charger-Black

	HIGH	MEDIUM	LOW
LUMENS:	800	400	200
CANDELA:	24,000	12,000	6,000
DISTANCE:	310m	216m	155m
RUN TIME:	1h 30m	2h 30m	5h

Strobe mode: 3 hours of continuous run time




HL®  With **[(STROBE)]**
Double tap switch to activate.

AVAILABLE IN BOTH DUAL SWITCH AND STANDARD STYLES


**DIFFERENT KINDS OF BEAMS
FOR DIFFERENT KINDS OF TASKS.**

WANT TO SEE THESE BEAMS IN ACTION?
Visit Streamlight's www.beamdemo.com
and see the differences for yourself.




TRADITION SERIES

This family of flashlights delivers the optimal balance of bright, far-reaching beam, ample peripheral light, and long run times. When you're out in the field or on any job that requires light for long periods, these are the flashlights you want by your side. Their brightness, power, performance, cost, and extended run times make them perfect for a variety of tasks.

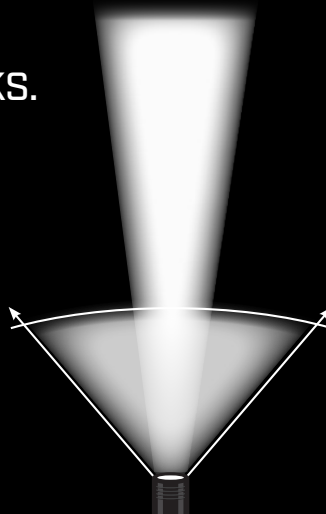

HPL SERIES

These High Performance, High Lumen flashlights throw bright light a long distance. They have a bigger hot spot that casts more light on the target with more peripheral light. They're great for illuminating the entire length of a dark alley, for any task that requires a far-reaching beam.



HL SERIES

These High Lumen flashlights have a wide, side-to-side beam. They illuminate an entire area, including what may be hiding in corners. They perform like floodlights, illuminating a whole room, vehicle, or any area with bright, revealing light.

THE STINGER SERIES IS ALWAYS ON THE JOB.

IT'S A DUTY LIGHT. BUILT WITH PRECISION & PERFORMANCE.



**STINGER
DUTY+TACTICAL
HOLSTER**

DUTY + TACTICAL HOLSTER
- Super-tough nylon construction
- Quick, Easy Access

STINGER DS® HPL STINGER® HPL

The Stinger® HPL has combined two intensely bright illumination patterns into one multi-tasking beam giving you clarity up-close and deep into the horizon. Its long distance beam reaches 438 meters and the 800 lumen beam provides side to side visibility to fill in up-close areas and corners.

STINGER DS HPL

BATTERY: NiMH Rechargeable

DS SIZE: 9.65" x 2.20" x 1.17"
(24.51 x 5.59 x 2.97 cm)

DS WEIGHT: 14.0 oz (396 g)

COLOR: Black

STINGER HPL

BATTERY: NiMH Rechargeable

SIZE: 9.23" x 2.20" x 1.17"
(23.44 x 5.59 x 2.97 cm)

WEIGHT: 13.6 oz (385 g)

COLOR: Black

DS HPL	HPL	
75863	75763	120V AC/12V DC - 2 holders
75861	75761	120V AC
75899	75799	12V DC
75882	75782	120V AC/12V DC - 1 PiggyBack
75900	75980	Without Charger

	HIGH	MEDIUM	LOW
LUMENS:	800	400	200
CANDELA:	48,000	24,000	12,000
DISTANCE:	438m	310m	219m
RUN TIME:	1h 30m	2h 30m	5h

Strobe mode: 3 hours of continuous run time



With **[(STROBE)]**
Double tap switch to activate.

AVAILABLE IN BOTH DUAL SWITCH AND STANDARD STYLES

SEE **STINGER ACCESSORIES** P. 17



THE STINGER IS FOUND
IN MORE TOOL BOXES
AND HOLSTERS FOR TWO SIMPLE REASONS...
PERFORMANCE AND DEPENDABILITY.

STINGER DS® LED
STINGER® LED

The Stinger LED and Stinger DS LED deliver the optimal balance of performance and value with the longest run time in the Stinger family. The DS model provides both a tailcap and head switch.

STINGER DS LED

BATTERY: NiMH Rechargeable

DS SIZE: 8.85" x 1.62" x 1.17"
(22.48 x 4.11 x 2.97 cm)

DS WEIGHT: 12.8 oz (364 g)

COLOR: Black

STINGER LED

BATTERY: NiMH Rechargeable

SIZE: 8.41" x 1.62" x 1.17"
(21.36 x 4.11 x 2.97 cm)

WEIGHT: 12.4 oz (352 g)

COLOR: Black

DS LED LED

75813	75713	120V AC/12V DC Smart Charger—Black
75811	75711	120V AC Smart Charger—Black
75832	75732	120V AC/12V DC PiggyBack®—Black
75853	75753	12V DC Smart Charger—Black
75810	75710	Without Charger—Black

	HIGH	MEDIUM	LOW
LUMENS:	425	200	100
CANDELA:	26,000	12,000	6,000
DISTANCE:	322m	219m	155m
RUN TIME:	3h	5h 30m	10h

Strobe mode: 7.5 hours of continuous run time



With **[(STROBE)]**
Double tap switch to activate.

AVAILABLE IN BOTH DUAL SWITCH AND STANDARD STYLES



**FAR REACHING BEAM +
1,100 LUMENS...
THERE'S A REASON IT'S CALLED THE
ULTRASTINGER LED.**

ULTRASTINGER® LED

The UltraStinger LED delivers a piercing 1,100 lumens, but that's not all... it also has a far-reaching beam, TEN-TAP® programming for its multiple intensities and strobe; plus we added a rubber sleeve for a better grip. It's IPX4 rated for water resistance and it works with existing Stinger® chargers and accessories.

ULTRASTINGER LED

BATTERY: NiMH Rechargeable

SIZE: 11.82" x 2.37" x 1.19" (30 x 6.01 x 3 cm)

WEIGHT: 19.9 oz (564 g)

COLOR: Black

77553	AC/DC Smart Charger—Black
77551	AC Smart Charger—Black
77555	DC Smart Charger—Black
77550	Without Charger—Black

	HIGH	MEDIUM	LOW
LUMENS:	1,100	350	90
CANDELA:	65,000	21,000	5,000
DISTANCE:	510m	290m	141m
RUN TIME:	1h 30m	4h 30m	16h

Strobe mode: 3h 15m of continuous run time



TEN-TAP® programmable switch allows user selection of one of three different programs:

- High/medium/low with strobe (factory default)
- High only without strobe
- High/medium/low without strobe

With **[(STROBE)]**

Double tap switch to activate.

BUILT FOR DURABILITY AND PERFORMANCE.

POLYSTINGER® LED HAZ-LO®

If you're working in a potentially hazardous location, this is the light you need. It provides lots of bright, white light, yet it's intrinsically safe, with a Class I, Div. 1. rating. It has an O-ring sealed, unbreakable, scratch-resistant lens. It's IPX4 rated for water-resistance, and 3 meter impact-resistance tested.

	HIGH	LOW
LUMENS:	130	50
CANDELA:	15,000	5,700
DISTANCE:	245m	151m
RUN TIME:	4h	12h

Moonlight mode: 20 days of continuous run time



Class I & II, Division 1, Groups C,D,F,G;
Class I, Division 2, Groups A,B,C,D;
Class III; 138 C, T-Code: T3C

Lanyard Ring
with lanyard for tail cap.

POLYSTINGER LED HAZ-LO

BATTERY: NiCd Rechargeable

SIZE: 10.2" x 1.76" x 1.34" (25.9 x 4.47 x 3.4 cm)

WEIGHT: 13.5 oz (382 g)

COLOR: Black or Yellow

YELLOW BLACK

76412	76442	120V AC/12V DC Smart Charger
76411	76441	12V DC Smart Charger
76410	76440	Without Charger

ACCESSORIES

76409	Lanyard
75928	Loop Holster
75906	Ring Holder
76375	NiCd Battery Stick
75400	5 Unit Bank Smart Charger 120V
22060	120V AC Charge Cord
22051	DC1 Charge Cord
22050	DC2 Direct Wire Charge Cord

POLYSTINGER DS® LED POLYSTINGER® LED

Intense brightness, long-range and long run time in a durable nylon polymer housing. It's the ideal combination of power, performance and durability. The DS model has the convenience of two full-function, independent switches: one on the head and a tail switch.

	HIGH	MEDIUM	LOW
LUMENS:	485	240	120
CANDELA:	28,000	14,000	7,000
DISTANCE:	335m	237m	167m
RUN TIME:	3h	5h 30m	10h

Strobe mode: 7.5 hours of continuous run time



With **[(STROBE)]**
Double tap switch to activate.

AVAILABLE IN BOTH DUAL SWITCH AND STANDARD STYLES

POLYSTINGER DS LED

BATTERY: NiMH Rechargeable

DS SIZE: 8.64" x 1.76" x 1.21"
(21.95 x 4.47 x 3.07 cm)

DS WEIGHT: 11.9 oz (338 g)

DS COLOR: Black

POLYSTINGER LED

BATTERY: NiMH Rechargeable

SIZE: 8.07" x 1.76" x 1.21"
(20.50 x 4.47 x 3.07 cm)

WEIGHT: 11.5 oz (326 g)

COLOR: Black or Yellow

DS LED	LED	
—	76163	120V AC/DC 2 Holders—Yellow
76813	76113	120V AC/DC 2 Holders—Black
—	76161	120V AC—Yellow
76811	76111	120V AC—Black
—	76199	12V DC—Yellow
76849	76149	12V DC—Black
—	76182	120V AC/DC 1 PiggyBack Holder—Yellow
76832	76132	120V AC/DC 1 PiggyBack Holder—Black
—	76203	Without Charger—Yellow
76850	76150	Without Charger—Black

STINGER ACCESSORIES

Stinger Accessories	STINGER 2020	DS LED HL LED HL	DS HPL HPL	DS LED LED	UltraStinger LED	PolyStinger LED HAZ-LO	PolyStinger LED / DS LED
5 Unit Bank Charger 	75400	75400	75400	75400	75400	75400	75400
Smart Charger 	75105	75105	75105	75105	75105	75105	75105
Steady PiggyBack® 	—	75277	75277	75277	—	—	75277
NIMH Battery Stick 	—	75375	75375	75375	77375	—	75375
Li-Ion Battery Stick 	—	75176	75176	75176	—	—	75176
NiCd Battery Stick 	—	—	—	—	—	76375	—
SL-B26 Battery Pack 	78105	—	—	—	—	—	—
12V Car Charge Cord 	22051	22051	22051	22051	22051	22051	22051
12V DC Charge Cord 	22050	22050	22050	22050	22050	22050	22050
120V AC Charge Cord 	22071	22071	22071	22071	22071	22071	22071
Leather Plain Holster 	—	75133	—	75133	—	—	75133
Leather Weave Holster 	—	75134	—	75134	—	—	75134
Std. Nylon Holster 	—	75927	75927	75927	—	—	75910
Loop Nylon Holster 	—	75928	75928	75928	75928	75928	75928
Duty Holster 	—	88053	88053	88053	88053	—	—
Ring Holder 	—	75906	75906	75906	75906	75906	75906
Red Flip Lens 	75115	75115	—	75115	—	—	—
Green Flip Lens 	75117	75117	—	75117	—	—	—
Blue Flip Lens 	75116	75116	—	75116	—	—	—
Red Wand 	75903	75903	75946	75903	78903	—	75933
White Wand 	75908	75908	75949	75908	—	—	75938
Blue Wand 	75902	75902	75947	75902	—	—	75932
Yellow Wand 	75904	75904	75948	75904	78904	—	75934
Glow in the Dark Wand 	75913	75913	75950	75913	78913	—	75943
USB Cord 22" & 40" 	22081 - 22" 22070 - 40"	—	—	—	—	—	—
"Y" USB Cord 	22082	—	—	—	—	—	—
12V DC USB Adapter 	22069	—	—	—	—	—	—
Facecap Ring Kit 	78113	—	—	—	—	—	—

**STRION DS HL®
STRION LED HL®**

The power of a Stinger in a more compact Lithium Ion rechargeable flashlight. It even fits long-gun mounts. Casts a bright white beam that spreads out to illuminate an entire area. You'll see what's in front of you and what may be hiding in the corners.

STRION DS HL

BATTERY: Li-ion Rechargeable

SIZE: 6.33" x 1.25" x .95"
(16.08 x 3.18 x 2.41 cm)

WEIGHT: 5.4 OZ (153 g)

COLOR: Black

STRION LED HL

BATTERY: Li-ion Rechargeable

SIZE: 5.90" x 1.25" x .95"
(14.99 x 3.18 x 2.41 cm)

WEIGHT: 5.2 OZ (148 g)

COLOR: Black

STRION HL	HIGH	MEDIUM	LOW
LUMENS:	615	320	160
CANDELA:	12,000	6,000	3,000
DISTANCE:	219m	155m	110m
RUN TIME:	1h 15m	2h 30m	4h 30m

Strobe mode: 3 hours of continuous run time



Dual Switch With **[(STROBE)]**
TECHNOLOGY Double tap switch to activate.
AVAILABLE IN BOTH DUAL SWITCH AND STANDARD STYLES

DS model features **TEN-TAP®** programmable switch that allows user selection of one of three different programs:

- High/medium/low with strobe (factory default)
- High only without strobe
- High/medium/low without strobe

STRION DS HL	HIGH	MEDIUM	LOW
LUMENS:	700	300	40
CANDELA:	12,000	5,000	800
DISTANCE:	219m	141m	57m
RUN TIME:	1h 15m	3h 30m	24h

Strobe mode: 2.5 hours of continuous run time

DS HL	LED HL	
74612	74752	120V AC/12V DC - 2 holders-Black
74611	74751	120V AC/12V DC - 1 holder-Black
74621	74755	120V AC/12V DC - 1 holder-Black-Clam
74619	74778	120V AC/12V DC - 1 PiggyBack-Black
74613	74753	120V AC
74614	74754	12V DC
74610	74750	Without Charger-Black
74620	74509	Strion LED HL with grip ring - with 120V AC

**STRION DS® HPL
STRION® HPL**

Lightweight and ultra-compact, yet extremely powerful. It throws its long beam far out in the distance while casting plenty of peripheral light along the way. Features three intensities plus strobe. Rechargeable battery and powerful illumination result in one of the lowest operating costs of any flashlight. Easy, one-handed operation with multi-function push-button tailswitch.

STRION DS HPL

BATTERY: Li-ion Rechargeable

SIZE: 7.56" x 2.2" x .95"
(19.2 x 5.59 x 2.41 cm)

WEIGHT: 6.9 OZ (196 g)

COLOR: Black

STRION HPL

BATTERY: Li-ion Rechargeable

SIZE: 7.00" x 2.2" x .95"
(17.78 x 5.59 x 2.41 cm)

WEIGHT: 7.1 OZ (202 g)

COLOR: Black

STRION HPL	HIGH	MEDIUM	LOW
LUMENS:	615	320	160
CANDELA:	40,000	20,000	10,000
DISTANCE:	400m	283m	200m
RUN TIME:	1h 15m	2h 30m	4h 30m

Strobe mode: 3 hours of continuous run time



Dual Switch With **[(STROBE)]**
TECHNOLOGY Double tap switch to activate.
AVAILABLE IN BOTH DUAL SWITCH AND STANDARD STYLES

DS model features **TEN-TAP®** programmable switch allows user selection of one of three different programs:

- High/medium/low with strobe (factory default)
- High only without strobe
- High/medium/low without strobe

STRION DS HPL	HIGH	MEDIUM	LOW
LUMENS:	700	300	40
CANDELA:	44,000	18,000	2,600
DISTANCE:	420m	268m	102m
RUN TIME:	1h 15m	3h 30m	24h

Strobe mode: 2.5 hours of continuous run time

DS HPL	HPL	
74811	74501	120V AC/12V DC - 1 Holder - Black
74812	74502	120V AC/12V DC - 2 Holders - Black
74819	74536	120V AC/12V DC - 1 PiggyBack
74813	74503	120V AC - Black
74814	74504	12V DC - Black
74810	74500	Without Charger - Black

STRION DS® STRION® LED

A powerful value that's perfect for the broadest range of lighting needs. IPX4 rated for water-resistance. Anti-roll ring included. Optional model with adjustable Grip Ring provides a sure-grip for easy one-handed operation.

STRION DS

BATTERY: Li-ion Rechargeable
SIZE: 6.4" x 1.25" x .95"
(16.26 x 3.18 x 2.41 cm)
WEIGHT: 5.4 oz (153 g)
COLOR: Black

STRION LED

BATTERY: Li-ion Rechargeable
SIZE: 5.9" x 1.25" x .95"
(14.99 x 3.18 x 2.41 cm)
WEIGHT: 5.2 oz (148 g)
COLOR: Black or Pink

STRION LED	HIGH	MEDIUM	LOW
LUMENS:	375	175	80
CANDELA:	12,000	6,500	3,200
DISTANCE:	219m	161m	113m
RUN TIME:	2h 30m	4h 45m	9h 30m

Strobe mode: 6.5 hours of continuous run time



With **[(STROBE)]**
Dual Switch TECHNOLOGY. Double tap switch to activate.
AVAILABLE IN BOTH DUAL SWITCH AND STANDARD STYLES

DS model features **TEN-TAP®** programmable switch allows user selection of one of three different programs:

- High/medium/low with strobe (factory default)
- High only without strobe
- High/medium/low without strobe

STRION DS	HIGH	MEDIUM	LOW
LUMENS:	375	150	40
CANDELA:	12,000	5,000	1,300
DISTANCE:	219m	141m	72m
RUN TIME:	2h 30m	6h 15m	24h

Strobe mode: 5 hours of continuous run time

DS	STRION	
74411	74301	120V AC/12V DC – 1 Holder – Black
74412	74302	120V AC/12V DC – 2 Holders – Black
74413	74303	120V AC – Black
74414	74304	12V DC – Black
74421	74308	120V AC/12V DC – Black – Clam
74419	74353	120V AC/12V DC – 1 PiggyBack – Black
–	74361	120V AC/12V DC – 1 PiggyBack – Pink (BCRF)
74410	74300	Without Charger – Black
74420	74309	Grip Ring 120V AC – Black
–	74350	120V AC/12V DC – 1 Holder – Pink (BCRF)

STRION ACCESSORIES

Strion Accessories	STRION / DS LED HL	STRION HPL / DS HPL	STRION / STRION DS
6 Unit Bank Charger 120V	74400	74400	74400
6 Unit Bank Charger DC	74401	74401	74401
Piggyback Charger Holder	74115	74115	74115
Smart Charger Holder	74102	74102	74102
Li-ion Battery Stick	74175	74175	74175
12V DC1 Charge Cord	22051	22051	22051
12V DC2 Charge Cord	22050	22050	22050
120V USB Charge Cord	22071	22071	22071
Rail Mount	74200	74200	74200
Vertical Grip	69114	69114	69114
Leather Plain Holster	74059	–	74059
Leather Weave Holster	74060	–	74060
Std. Nylon Holster	–	75910	–
Nylon Option Holster	85905	–	85905
Tactical Holster	88051	88051	88051
Red Flip Lens	85115	–	85115
Green Flip Lens	85117	–	85117
Blue Flip Lens	85116	–	85116
Red Wand	74903	75946	74903
White Wand	–	75949	–
Blue Wand	–	75947	–
Yellow Wand	74904	75948	74904
Glow Wand	74913	75950	74913

STREAMLIGHT SL-20L SERIES



SL-20L®

Full-size, professional grade light that delivers the intense brightness and run times you need for a wide variety of jobs.

SL-20L

BATTERY: NiMH Rechargeable

SIZE: 13.1" x 2.5" x 1.5"
(33.3 x 6.35 x 3.81 cm)

WEIGHT: 1 lb 11.2 oz (770 g)

COLOR: Black

20703	120V AC/DC-Smart Charge - 2 Sleeves - Black
20701	120V AC Smart Charge - Black
20702	12V DC Smart Charge - Black
20700	Without Charger - Black

With **[(STROBE)]**
Double tap switch to activate.

UPGRADED

	HIGH	MEDIUM	LOW
LUMENS:	450	225	60
CANDELA:	70,000	35,000	9,000
DISTANCE:	529m	374m	189m
RUN TIME:	3h 15m	5h	20h

Strobe mode: 4.5 hours of continuous run time

Special Features:

- Unbreakable, scratch-resistant, O-ring sealed lens.
- IPX4 rated for water-resistance.
- 1 meter impact-resistance tested.

SL ACCESSORIES



	5 Unit Bank Charger 120v	5 Unit Bank Charger DC	Charger Sleeve	12V DC1 Car Charger	12V DC2 Charge Cord	120V AC Charge Cord
SL-20L	21400	21401	22047	22051	22050	22060
SL-20LP	21400	21401	22047	22051	22050	22060

A HISTORY OF PERFORMANCE, THE LEGENDARY FULL-SIZE DUTY LIGHT.



SL-20LP®

All the power and performance of our SL-20L® in a durable, nylon polymer lightweight housing.

SL-20LP

BATTERY: NiMH Rechargeable

SIZE: 13.2" x 2.5" x 1.5"
(33.5 x 6.35 x 3.81 cm)

WEIGHT: 1.3 lb (590 g)

COLOR: Black, Yellow or Orange

25323	120V AC/12V DC Smart Charge - 2 Sleeves - Yellow
25303	120V AC/12V DC Smart Charge - 2 Sleeves - Black
25313	120V AC/12V DC Smart Charge - 2 Sleeves - Orange
25321	120V AC Smart Charge - Yellow
25301	120V AC Smart Charge - Black
25311	120V AC Smart Charge - Orange
25322	12V DC Smart Charge - Yellow
25302	12V DC Smart Charge - Black
25312	12V DC Smart Charge - Orange
25320	Without Charger - Yellow
25300	Without Charger - Black
25310	Without Charger - Orange

UPGRADED

With **[(STROBE)]**
Double tap switch to activate.

	HIGH	MEDIUM	LOW
LUMENS:	450	225	60
CANDELA:	70,000	35,000	9,000
DISTANCE:	529m	374m	189m
RUN TIME:	3h 15m	5h	20h

Strobe mode: 4 hours of continuous run time

Special Features:

- Unbreakable, scratch-resistant, O-ring sealed lens.
- IPX4 rated for water-resistance.
- 1 meter impact-resistance tested.



	NIMH Battery Stick	Ring Holder	Std. Nylon Holster	Red Wand	Blue Wand	Yellow Wand	Glow in the Dark Wand
SL-20L	77375	22911	25090	22511	22512	22519	22513
SL-20LP	77375	22911	25090	22511	22512	22519	22513

WORKLIGHTS SERIES //

WORKLIGHT SPECIALISTS

**IN THE GARAGE, ON THE WORK TRUCK OR IN THE FIELD,
STREAMLIGHT DELIVERS LIGHT WHERE YOU NEED IT.**

At Streamlight we innovate lighting solutions that make sense.

We build lights that put function right alongside performance and convenience. That's exactly what our family of worklights is design to deliver. With innovative mounts, charging systems and light deliver, we make it easier for you to get the job done.



STRION SWITCHBLADE®

STINGER SWITCHBLADE®



SYCLONE®

FLIPMATE®

STREAMLIGHT
WORKLIGHTS SERIES

THE STINGER SWITCHBLADE
SPENDS AS MUCH TIME
**UNDER THE CAR,
ON THE WALL,
AND COVERED
IN GREASE**
AS YOU DO. A PERFECT MATCH.



STINGER SWITCHBLADE®

Compact and extremely powerful, the Stinger Switchblade® rechargeable area light offers three (3) lighting options. The blade of the Switchblade can rotate 180° on the body. Soft detents will hold the blade in your desired position, and the light will stand on its tail with the light bar in any position. There are multiple ways to hook and hang the light. Use the hooks on the base plate or the retractable hook for many hanging options. The weighted base also includes magnets that will hold the light (in any orientation) to provide task-specific illumination.



STINGER SWITCHBLADE

BATTERY: Lithium Ion Rechargeable
FOLDED SIZE: 9.80" x 1.62" x 1.40" (24.89 x 4.11 x 3.56 cm)
EXTENDED LENGTH: 17.0" (43.18 cm)
WEIGHT: 17.1 oz (485 g)
COLOR: Red

76801 120V/100V AC 1 holder – Red
 76800 USB cord – Red



HANDS-FREE APPLICATIONS:
 TAIL-END MAGNET. STOWABLE HANG HOOK
 AND STABLE FOOT



180° rotating light bar aims the beam where you need it.

	COOL WHITE	90 CRI	UV LED
OUTPUT:	800 Lumens	600 Lumens	500 mW
RUN TIME:	3h 45m	3h 45m	15h



DOUBLE-SIDED LIGHT BAR:

- 1.) 90 CRI LEDs - Color-Rite Technology - allows you to distinguish between similar colors - for paint matching, checking wires, etc.
- 2.) Cool white LEDs for bright, white light
- 3.) UV LED for leak detection



DUAL CHARGING OPTIONS:
 CHARGE USING EXISTING STINGER CHARGERS
 OR CHARGE VIA USB SOURCE

STINGER SWITCHBLADE ACCESSORIES

5 Unit Bank Charger		75400
Smart Charger		75105
Li-Ion Battery Stick		76805
12V Car Charge Cord		22051
12V DC Charge Cord		22050
120V AC Charge Cord		22071
USB Cord 22" & 40"		22081 - 22" 22070 - 40"
12V DC USB Adapter		22069

STRION SWITCHBLADE®

Compact & extremely powerful, the Strion Switchblade® LED rechargeable area light offers three (3) lighting options. Cool white LEDs for area lighting, 90 CRI LEDs for color matching, and a UV LED for leak detection. All use the latest in power LED technology. The rechargeable battery results in one of the lowest operating costs of any area light of this type. The blade can rotate 180° on the body. Soft detents will hold the blade in your desired position, and the light will stand on its tail with the light bar in any position. There are multiple ways to hook and hang the light. Use the hooks on the base or the retractable swivel hook for many hanging options. The base also includes magnets that will hold the light on any convenient ferrous metal surface (in any orientation) to provide task-specific illumination.

STRION SWITCHBLADE

BATTERY: Lithium Ion Rechargeable
FOLDED SIZE: 6.0" x 1.18" x .99" (15.24 x 3.0 x 2.51 cm)
EXTENDED LENGTH: 10.75" (27.30 cm)
WEIGHT: 6.4 oz (181 g)
COLOR: Red

74850	USB cord – Red
74851	120V/100V AC 1 holder – Red
74854	120V/100V AC PiggyBack – Red



HANDS-FREE APPLICATIONS:
 TAIL-END MAGNET. STOWABLE HANG HOOK
 AND STABLE FOOT



MULTIPLE CHARGING OPTIONS:
 CHARGE USING PIGGYBACK® CHARGERS, EXISTING STRION
 CHARGERS OR CHARGE VIA USB SOURCE



DOUBLE-SIDED LIGHT BAR:

- 1.) 90 CRI LEDs - Color-Rite Technology™ - allows you to distinguish between similar colors - for paint matching, checking wires, etc.
- 2.) UV LED for leak detection
- 3.) Cool white LEDs for bright, white light




180° rotating light bar aims the beam where you need it.

	COOL WHITE	90 CRI	UV LED
OUTPUT:	500 Lumens	400 Lumens	500 mW
RUN TIME:	3h	3h	5h



STRION SWITCHBLADE ACCESSORIES

6 Unit Bank Charger 120V		74400
6 Unit Bank Charger DC		74401
PiggyBack Charger Holder		74115
Smart Charger Holder		74102
Li-ion Battery Stick		74175
12V DC1 Charge Cord		22051
12V DC2 Charge Cord		22050
120V USB Charge Cord		22071

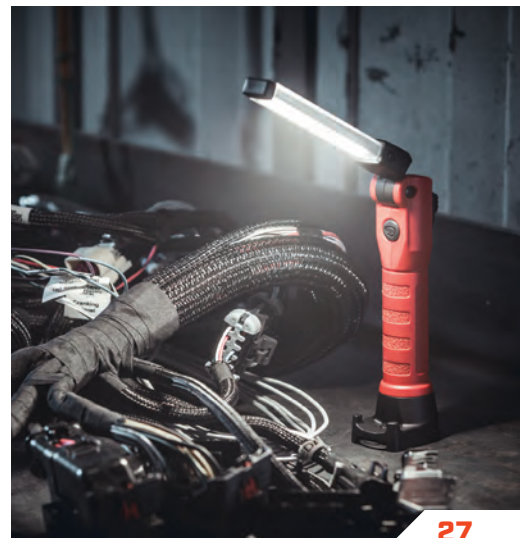



SYCLONE
400 ULTRA-COMPACT
LUMEN WORK LIGHT
WITH SPOT OR FLOOD.

SYCLONE®

Inspect, identify and repair with the Syclone. It produces bright white light for everyday use or high CRI light with Streamlight's Color-Rite Technology™ for paint matching or identifying color differences in wires. Ultra-compact design doesn't get in the way and fits in small spaces. Go hands-free with the flat, magnetic base and stowable hook.

SYCLONE

BATTERY: Lithium Polymer Rechargeable

SIZE: 2.97" x 2.79" x 1.42" (7.54 x 7.08 x 3.60 cm)

WEIGHT: 5.3 OZ (150 g)

COLOR: Red

61510 Syclone with USB cord—Red



CHARGING



CHARGED

Multi-function push-button switch with charge indicator.
Battery charges in approx. 4.5 hours



USB rechargeable
Lithium ion battery
recharges in 4.5 hours



NEW



Hands-free applications:

- 1.) Magnetic base
- 2.) Stowable hang hook



SPOT	HIGH	MED	LOW
LUMENS:	400	200	100
CANDELA:	5,000	2,250	1,300
DISTANCE:	141m	95m	72m
RUN TIME:	2h	4h 30m	9h 30m

FLOOD	HIGH	MED	LOW
LUMENS:	300	150	75
CANDELA:	580	300	150
DISTANCE:	48m	35m	24m
RUN TIME:	2h	4h	8h

Special Features:

- **360° rotating body aims the beam where you need it; easy to rotate with one hand - no need to juggle tools**

FLIPMATE®

Inspect, identify and repair with the super-compact FlipMate. It produces bright white light for everyday use or high CRI light with Streamlight's Color-Rite Technology™ to identify color differences in paint or wires. Fits comfortably in the palm of your hand, allowing you to illuminate hard-to-get-to spaces, like under the dash. Go hands-free with the flat, magnetic base and stowable hook.

FLIPMATE

BATTERY: Lithium Ion Rechargeable

SIZE: 2.37" x 5.44" (6.00 x 13.82 cm)

WEIGHT: 8.7 oz (247 g)

COLOR: Black, Red, or Blue

61500	FlipMate with USB Cord – Black
61501	FlipMate with USB Cord – Red
61502	FlipMate with USB Cord – Blue



Hands-free applications:
1.) Magnetic base
2.) Stowable hang hook



COOL WHITE LED	HIGH	LOW
LUMENS:	500	250
RUN TIME:	2h 30m	5h 45m

90 CRI LED	HIGH	LOW
LUMENS:	400	200
RUN TIME:	2h 30m	6h

NEW

Double-function light bar:

- 1.) 90 CRI LEDs - Color-Rite Technology™ - distinguish between similar colors - for paint matching, checking wires, etc.
- 2.) Cool white LEDs for bright, white light
Each with high and low modes



270° rotating light bar aims the beam where you need it



USB rechargeable
Lithium ion battery
recharges in 4.5 hours



FLIPMATE
MULTI-FUNCTION LIGHT
THAT STANDS, HANGS, ROTATES AND STICKS

SCENE LIGHT/LANTERN SERIES //

SCENE LIGHTING SPECIALISTS

FROM FIRST ON THE SCENE TO THE LAST ONE OUT
OF THE TUNNEL, HEROES TRUST STREAMLIGHT.

Lanterns are part of our history and part of our future. In 1973, Streamlight pioneered portable lighting with our million candlepower SL and for the past 45+ years we continue to forge new ways to provide light where it's needed.



PORTABLE
SCENE LIGHT



VULCAN® 180



WAYPOINT 300®



THE SIEGE® LANTERN



PORTABLE SCENE LIGHT II

LIGHT UP THE WORLD ANYWHERE YOU WANT.

PORTABLE SCENE LIGHT PORTABLE SCENE LIGHT EXT

The Portable Scene Light provides rapid deployment on site, and it goes anywhere. With its 90° swivel neck, it's easy to shine light into the most out-of-the-way place. The head extends to 72" within seconds. It provides 3 levels of lighting and substantial run time to last through several shifts, even days. The unique diffuser lets you select a flood or spot beam in all three levels. It's designed to adapt to tight spaces, but rugged enough to be stable in wide open terrain or steps. The regulated light provides consistent output throughout the life of the battery. It's an indispensable tool for first responders, construction crews, and utility workers.

PORTABLE SCENE LIGHT

BATTERY: Zero-maintenance, sealed lead acid. Can also be powered by 12V DC power cord.

SIZE: 22" x 6.5" x 11" (55.88 x 16.5 x 27.9 cm)

WEIGHT: 25 lb (11.3 kg)

COLOR: Yellow

PORTABLE SCENE LIGHT EXT

BATTERY: Zero-maintenance, sealed lead acid. Can also be powered by 12V DC power cord.

SIZE: 25.5" x 6.5" x 11" (55.88 x 16.5 x 27.9 cm)

WEIGHT: 25.5 lb (11.6 kg)

COLOR: Yellow

PORTABLE SCENE LIGHT

45670 120V AC/12V DC Portable Scene Light – Yellow

PORTABLE SCENE LIGHT EXT

45680 120V AC/12V DC Portable Scene Light – Yellow

	HIGH	MEDIUM	LOW
LUMENS:	5,300	2,500	1,300
CANDELA:	42,000	21,300	11,600
DISTANCE:	410m	292m	215m
RUN TIME:	4h	9h	18h

Portable Scene Light
 packs to a compact size
 for easy storage
 (22 in.; 55.88 cm)



Portable Scene Light EXT
 packs to a compact size
 for easy storage
 (25.5 in.; 64.8 cm)



Special Features:

- Full deployment in 30 seconds
- Designed to resist 40mph wind continuous in all directions with head fully extended
- Unlimited run time using AC/DC power source
- IP67 rated; dust-tight and
- WATERPROOF TO 1M FOR 30 MINUTES**
- Stabilization legs provide balance on uneven surfaces





PORTABLE SCENE LIGHT II : TURN TO A HIGHER POWER

- STACKABLE FOR “LIGHT TOWER” CAPABILITY
- 360-DEGREE ROTATING HEAD
- PORTABLE, CORDLESS AND LIGHTWEIGHT
- HIGH-QUALITY, VIRTUALLY INDESTRUCTIBLE ALLOY STEEL FRAME
- WATERPROOF
- 10,000 LUMENS



PORTABLE SCENE LIGHT II

Turn to a higher power with the Portable Scene Light II. 18 LEDs produce 10,000 lumens to light up the entire scene. With zero deployment time, it features a compact footprint, 360° rotating head and it's stackable for “light tower” capability with multi-level lighting. High-impact thermoplastic housing mounted in a virtually indestructible alloy steel frame. Hooked feet for hanging over doors, guard rails, fences, etc. The perfect scene light for marking exits, post fire investigation, fire ground clean-up, mobile triage center lighting, etc.

PORTABLE SCENE LIGHT II

BATTERY: Lithium-ion Rechargeable

SIZE: 16" x 11" x 12" (19.05 x 12.7 x 16.51 cm)

WEIGHT: 15.38 lbs (6.10 kg)

COLOR: Red

46000 120V AC/12V DC—Red



	100%	80%	60%	40%	20%
LUMENS:	10,000	8,300	6,300	4,500	2,300
RUN TIME:	2h	2h 45m	3h 45m	5h 45m	11h

Digital display shows intensity level and run time



Toggle switch - choose from 5 intensity levels

Special Features:

- Portable, cordless, ultra compact
- Virtually indestructible alloy steel frame
- Unlimited run time using AC/DC power source
 - Batteries will continue to charge while in use
- **IPX7 WATERPROOF TO 1M FOR 30 MINUTES**

Use a single unit or stack for multi-level lighting



Hang over doors, guard rails, fences, etc.



CORDLESS AND COMPACT PREVENTS TRIP HAZARDS

The Portable Scene Light II makes your work site safer and clean up easier. It's cordless and compact so it removes trip hazards and is easy to maneuver around. Stackable for "light tower" capability, individual units feature a 360° rotating head to aim the beam for multi-level lighting. Lightweight - under 16 lbs - so if you need to grab one off the stack and move to another location, it won't weigh you down.

TAKE YOUR WORK SITE FROM THIS:



TO THIS:





The Fire Vulcan and Vulcan 180 feature blue taillight LEDs for rear visibility.

SEE AND BE SEEN EVEN IN THE THICKEST SMOKE

THE VULCAN SERIES FEATURE A TIGHT BEAM AND
BLUE TAILLIGHT LEDES

VULCAN® 180

The lightest portable lantern of its kind, the Vulcan 180 is designed to burn brighter and run longer making it an essential firefighting tool. This rechargeable, waterproof lantern has a 180° tilting head which allows you to direct the light where you need it. Three LEDs bring you extreme brightness along with two blue taillight LEDs for visibility in thick smoke.

VULCAN 180

BATTERY: Lithium-ion Rechargeable

SIZE: 7.43" x 4.32" x 4.36"
(18.8 x 10.9 x 11 cm)

WEIGHT: 2.47 lbs (1123 g)

COLOR: Orange or Yellow

44301	Standard System with 120V AC/12V DC, with shoulder strap and charging rack—Yellow
44305	Vehicle Mount System with 12V DC, with shoulder strap and charging rack—Yellow
44307	Standard System with 120V AC/12V DC, with quick release strap and charging rack—Yellow
44311	Standard System with 120V AC/12V DC, with quick release strap and charging rack—Orange
44315	Vehicle Mount System with 12V DC, with quick release strap and charging rack—Orange



180° articulating head puts the light where you need it.

	HIGH	LOW
LUMENS:	1,200	350
CANDELA:	75,000	22,000
DISTANCE:	548m	296m
RUN TIME:	5h 45m	16h

Flat base area allows light to stand on its own for scene lighting.



Quick install charge rack fits same foot print as LiteBox® and Vulcan® Series.



Class I, Division 2, Groups A, B, C, D;
Class II, Division 2, Groups F, G;
Class III; T-Class: T4

NFPA

Rack meets requirements of
NFPA 1901-14.1.10.2 (2016)
mounted in any position

	HIGH	LOW
LUMENS:	400	130
CANDELA:	25,000	8,000
DISTANCE:	316m	128m
RUN TIME:	10h	24h

Large, multi-function, push button switch easy to use with gloved hands.



NEW



Class I, Div 1, Groups A, B, C, D;
Class II, Div. 1, Groups E, F, G;
Class I, Zone O, Group IIC
Class III, T4

NFPA

Rack meets requirements of
NFPA 1901-14.1.10.2 (2016)
mounted in any position

Taillight LEDs ensure you can be seen even from behind. Can be programmed on or off.



VULCAN® 180 HAZ-LO®

Developed for use in hazardous locations on a portable scene light platform the Class 1, Div. 1 safety rated Vulcan 180 is lightweight and rechargeable. Features three white power LEDs for extreme brightness and two ultra-bright blue taillight LEDs provide visibility from behind. Use its 180° articulating head to target the light where needed. A large handle enables smooth handoffs even with gloves. IP67 rated - waterproof to 1m submersion.

VULCAN 180 HAZ-LO

BATTERY: Lithium-ion Rechargeable

SIZE: 7.43" x 4.32" x 4.36" (18.8 x 10.9 x 11 cm)

WEIGHT: 2.45 lbs (1112 g)

COLOR: Orange or Yellow

44321	HAZ-LO Standard System with 120V/100V AC/12V DC, with shoulder strap and charging rack – Yellow
44325	HAZ-LO Vehicle Mount System with 12V DC, with shoulder strap and charging rack – Yellow
44320	HAZ-LO Light Only – Yellow
44311	HAZ-LO Standard System with 120V/100V AC/12V DC, with quick release strap and charging rack – Orange
44335	HAZ-LO Vehicle Mount System with 12V DC, with quick release strap and charging rack – Orange
44330	HAZ-LO Light Only – Orange

FIRE VULCAN® LED

This lightweight lantern with taillight LEDs helps you be seen even in thick smoke. It's IPX7 rated for water resistance to 1 meter for 30 minutes. It even floats! Delivers regulated, consistent light throughout battery life. The light modes are programmable, so you can control the order in which the modes come on. Features an unbreakable, scratch-resistant, O-ring sealed lens.

FIRE VULCAN LED

BATTERY: Lithium-ion Rechargeable

SIZE: 7.5" x 5" x 6.5" (19.05 x 12.7 x 16.51 cm)

WEIGHT: 1.85 lbs (839 g)

COLOR: Orange

44450	Standard System with 120V AC/12V DC – Orange
44451	Vehicle Mount with 12V DC – Orange
44454	without Charger – Orange

	HIGH	LOW
LUMENS:	180	80
CANDELA:	100,000	45,000
RUN TIME:	5h	10h

Ultra-bright blue taillight LEDs make certain you can be seen, even in thick smoke.



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F, G;
Class III T-Code: T4

NFPA

Rack meets requirements of
NFPA 1901-14.1.10.2
(2016) mounted in
any position

**STREAMLIGHT
LANTERN SERIES**



**E-FLOOD® LITEBOX®
E-FLOOD® FIREBOX®**

Six LEDs spread light over an entire area. It has an extended run time - 18 hrs. on low - so you can keep large areas illuminated no matter how long your shift lasts. With its swivel head, you can point light right where it's needed. The FireBox has 2 rear blue LEDs so you can be seen from behind: a life-saving feature for firefighters!

E-FLOOD LITEBOX / E-FLOOD FIREBOX

BATTERY: Zero-maintenance, sealed lead acid

SIZE: 11.5" x 5.1" x 7"
(29.2 x 13 x 17.8 cm)

WEIGHT: 7.9 lbs (3.58 kg)

COLOR: Orange or Yellow

E-FLOOD LITEBOX

- 45801 120V AC/12V DC, shoulder strap and mounting rack—Orange
- 45821 120V AC/12V DC, shoulder strap and mounting rack—Yellow
- 45805 Vehicle Mount System with 12V DC, shoulder strap—Orange
- 45825 Vehicle Mount System with 12V DC, shoulder strap—Yellow
- 45807 Power Failure w/120V AC/12V DC, mounting rack—Orange
- 45806 Without Charger - with shoulder strap—Orange
- 45826 Without Charger - with shoulder strap—Yellow

E-FLOOD FIREBOX

- 45811 120V AC/12V DC, dual rear LEDs, strap, mounting rack—Orange
- 45815 Vehicle Mount System w/DC, dual rear LEDs, shoulder strap—Orange
- 45832 Without Charger incl. shoulder strap—dual rear LEDs—Orange



	HIGH	LOW
LUMENS:	615	330
CANDELA:	4,000	2,150
DISTANCE:	126m	93m
RUN TIME:	8h	18h

NFPA

Rack meets requirements of NFPA 1901-14.1.10.2 (2016) mounted in any position



E-Flood FireBox includes dual safety blue rear LEDs.



The Power Failure System features "Smart" power failure circuitry which automatically illuminates the light when the power goes off

THE E-FLOOD & E-SPOT SERIES ARE ABOUT
DELIVERING
THE RIGHT LIGHT
EXACTLY WHERE
YOU NEED IT.

E-SPOT® LITEBOX®
E-SPOT® FIREBOX®

Three LEDs spotlight an area with focused bright light so you can search or inspect from a distance. Its beam has more of a hotspot than the E-Flood, providing more concentrated, brighter light. Its swivel head makes it easy to inspect high bays, ceilings, and out-of-the-way places. IPX4 rated for water-resistance. Optimized electronics provide regulated intensity. Unbreakable, scratch-resistant lens.

E-SPOT LITEBOX / E-SPOT FIREBOX

BATTERY: Zero-maintenance, sealed lead acid

SIZE: 11.5" x 5.1" x 7"
 (29.2 x 13 x 17.8 cm)

WEIGHT: 7.9 lbs (3.58 kg)

COLOR: Orange or Yellow



E-SPOT LITEBOX

45851	120V AC/12V DC, shoulder strap and mounting rack—Orange
45871	120V AC/12V DC, shoulder strap and mounting rack—Yellow
45855	Vehicle Mount System with 12V DC, shoulder strap—Orange
45875	Vehicle Mount System with 12V DC, shoulder strap—Yellow
45857	Power Failure System, shoulder strap and mounting rack—Orange
45856	Without Charger - with shoulder strap—Orange
45876	Without Charger - with shoulder strap—Yellow

E-SPOT FIREBOX

45861	120V AC/12V DC, dual rear LEDs, strap, mounting rack—Orange
45865	Vehicle Mount System w/DC, dual rear LEDs, shoulder strap—Orange
45882	Without Charger incl. shoulder strap—dual rear LEDs—Orange

	HIGH	LOW
LUMENS:	540	330
CANDELA:	55,000	32,000
DISTANCE:	469m	358m
RUN TIME:	7h	15h

NFPA

Rack meets requirements of NFPA 1901-14.1.10.2 (2016) mounted in any position



E-Spot FireBox includes dual safety blue rear LEDs.

Available in Power Failure System

Power failure circuitry automatically illuminates the light when the power goes off.

E-FLOOD® LITEBOX® HL

The intense brightness of its 5,300 lumens stretches from side to side and floods an entire area with light. Easy-to-use, twist to change diffuser lets you select from a flood and spot lens in all three lighting modes. 90° swivel neck lets you aim light where it's needed. Ideal for illuminating a rescue scene, an entire plant floor or any site that requires a large flood beam. The portability and full illumination is perfect for underground construction.

E-FLOOD LITEBOX HL

BATTERY: Zero-maintenance, sealed lead acid. Can also be powered by 12V DC power cord.

SIZE: 12.3" x 5.1" x 7.7" (31 x 13 x 19 cm)

WEIGHT: 10.4 lb (4.7 kg)

COLOR: Orange

E-FLOOD LITEBOX HL

45661 120V AC/12V DC, shoulder strap & mounting rack - Orange

45665 Vehicle Mount System, 12V DC direct wire rack, shoulder strap - Orange

45660 Without Charger - includes shoulder strap - Orange

Special Features:

- Six super-bright white LEDs
- Unbreakable, scratch-resistant, O-ring sealed lens.
- Provides regulated light output throughout battery life.



	HIGH	MEDIUM	LOW
LUMENS:	5,300	2,500	1,300
CANDELA:	42,000	21,300	11,600
DISTANCE:	410m	292m	215m
RUN TIME:	1h 45m	4h 30m	10h



NFPA

Rack meets requirements of NFPA 1901-14.1.10.2 (2016) mounted in any position



10 ft (3 meters) 12V DC power cord plugs into port at rear of light to provide duration lighting

HID LiteBox battery will continue to charge while operating directly from an external 12V DC power source when using the remote cord



	HIGH
LUMENS:	3,350
CANDELA:	1,000,000
RUN TIME:	1h 45m



Swivel neck shown in 90° position.



Swivel neck shown in 45° position.

HID LITEBOX®

This portable, one million candela searchlight illuminates objects up to a mile away. Its 35-watt, high intensity xenon lamp has a 2,000-hour minimum lifetime and a 90° swivel head. The intense brightness and amazing 1-mile reach make this the ideal hand-held light when you absolutely must be able to inspect an entire area quickly and efficiently. It plugs into your vehicle's power source for an unlimited run time.

HID LITEBOX

BATTERY: Zero-maintenance, sealed lead acid
























SIZE: 14.9" x 5.1" x 8.8" (38 x 13 x 23 cm)

WEIGHT: 10 lbs 1.6 oz (4.6 kg)

COLOR: Orange or Black

ORANGE BLACK

45601	45621	120V AC/12V DC includes shoulder strap and flood lens
45600	45620	Without Charger includes shoulder strap and flood lens
45605	45625	Vehicle Mount System with 12V DC — includes shoulder strap and flood lens

LANTERN SERIES ACCESSORIES		PART #	GOES WITH
Standard Mounting Rack—Orange Vehicle Mounting Rack—Orange		45070 45071	E-Flood LiteBox HL, E-Flood LiteBox/FireBox, E-Spot LiteBox/ FireBox, HID LiteBox
Standard Mounting Rack—Yellow Vehicle Mounting Rack—Yellow		45072 45074	E-Flood LiteBox/FireBox, E-Spot LiteBox/FireBox
Standard Mounting Rack—Black Vehicle Mounting Rack—Black		45075 45076	HID LiteBox
Standard Charge Rack - Black Vehicle Mounting Rack - Black		44103 44132	Fire Vulcan LED
Standard Charge Rack - Black Direct Wire 12V DC Charge Rack Kit - Black		44350 44306	Vulcan 180
12V DC (Car Socket) Charge Cord		22051	E-Flood LiteBox HL, E-Flood LiteBox/FireBox, E-Spot LiteBox/FireBox, HID LiteBox, Fire Vulcan LED, Vulcan 180
12V DC Charge Cord		22050	E-Flood LiteBox HL, E-Flood LiteBox/FireBox, E-Spot LiteBox/FireBox, HID LiteBox, Fire Vulcan LED, Vulcan 180
12V DC Charge Cord (10 ft/3m)		22056	Portable Scene Light, Portable Scene Light EXT, Portable Scene Light II, E-Flood LiteBox HL, HID LiteBox
120V AC Charge Cord		22060	E-Flood LiteBox HL, E-Flood LiteBox/FireBox, E-Spot LiteBox/FireBox, HID LiteBox, Fire Vulcan LED, Vulcan 180
Power Supply 120V AC Charge Cord		22083 22074	Portable Scene Light, Portable Scene Light EXT, Portable Scene Light II
Battery (Sealed Lead Acid)		45630	Portable Scene Light, Portable Scene Light EXT, E-Flood LiteBox HL, HID LiteBox
Battery (Sealed Lead Acid)		45937	E-Flood LiteBox, E-Spot LiteBox
Battery (Lithium Ion)		44610	Fire Vulcan LED
Battery (Lithium Ion)		44351	Vulcan 180
Battery (Lithium Ion)		46005	Portable Scene Light II
HID Bulb Kit		45637	HID LiteBox
Flood Lens		45657	HID LiteBox
IR Filter		45654	HID LiteBox
E-Spot Upgrade Kit		45845	E-Spot LiteBox/FireBox
E-Flood Upgrade Kit		45842	E-Flood LiteBox/FireBox
Quick Release Strap		44050	E-Flood LiteBox HL, E-Flood LiteBox/FireBox, E-Spot LiteBox/FireBox, HID LiteBox, Fire Vulcan LED, Vulcan 180
Heavy Duty Strap		45232	E-Flood LiteBox HL, E-Flood LiteBox/FireBox, E-Spot LiteBox/FireBox, HID LiteBox, Fire Vulcan LED, Vulcan 180
Heavy Duty Strap with Carabiner Lock		45677	Portable Scene Light

STREAMLIGHT WAYPOINT SERIES

WAYPOINT®

This long-distance, pistol-grip lantern is the light you need to inspect a power line from the ground, find a dock from the interior of a lake or to see whatever is way up ahead. Its beam reaches about the length of 6 football fields! It also has plenty of peripheral light, so you can see what's all around you. Set it down to illuminate an entire area or aim it to check on trees or power lines far away. Features 3 modes including a strobe for signaling.

WAYPOINT

BATTERY: 4 "C" batteries (not included). Can also be powered by 12V DC power cord (included)

SIZE: 6.75" x 7.14" x 3.5" (17.15 x 18.14 x 8.89 cm)

WEIGHT: 1.8 lb (816 g)

COLOR: Yellow or Black

YELLOW BLACK

44900	44902	12V DC power cord* - w/polymer storage mount
44904	44905	12V DC power cord*

ACCESSORIES

44908	44908	Polymer Storage Mount
44903	44903	12V DC power cord*
44924	44924	Red Filter
44925	44925	Green Filter

*12V DC power cord does not recharge batteries



Trigger style switch with momentary operation.



	HIGH	LOW
LUMENS:	550	40
CANDELA:	100,000	7,900
DISTANCE:	625m	178m
RUN TIME:	10h	82h

Unlimited run time when using 12V DC power cord. Emergency signal run time 82 hours.



Green Filter reduces shadows.

Red Filter preserves night vision.

WAYPOINT 300® RECHARGEABLE

The rechargeable Waypoint 300 produces a far-reaching beam that reaches into corners and illuminates high ceilings and other out-of-reach places. IPX8 - waterproof to 2m and it floats. High, medium and low modes provide the right amount of light and run time needed to complete your task. An integrated stand for hands-free area lighting. Recharges in 4 hours.

WAYPOINT 300

BATTERY: Lithium Ion with on-board safety control circuit

SIZE: 6.75" x 7.14" x 3.62" (17.15 x 18.14 x 9.29 cm)

WEIGHT: 1.52 lb (691 g)

COLOR: Yellow or Black

YELLOW BLACK

44910	44911	120V AC charge cord
-------	-------	---------------------

ACCESSORIES

44918	44918	Polymer Storage Mount
44915	44915	Red Filter
44916	44916	Green Filter
44923	44923	12V DC charge cord
44909	44909	120V AC charge cord

Green Filter reduces shadows.



Red Filter preserves night vision.




The Waypoint rechargeable holder allows for secure storage (included with product and also offered as an accessory).



Includes 120V Charge Cord.

	HIGH	MEDIUM	LOW
LUMENS:	1,000	550	35
CANDELA:	270,000	135,000	10,000
DISTANCE:	1,039m	735m	200m
RUN TIME:	3h 45m	7h 30m	87h

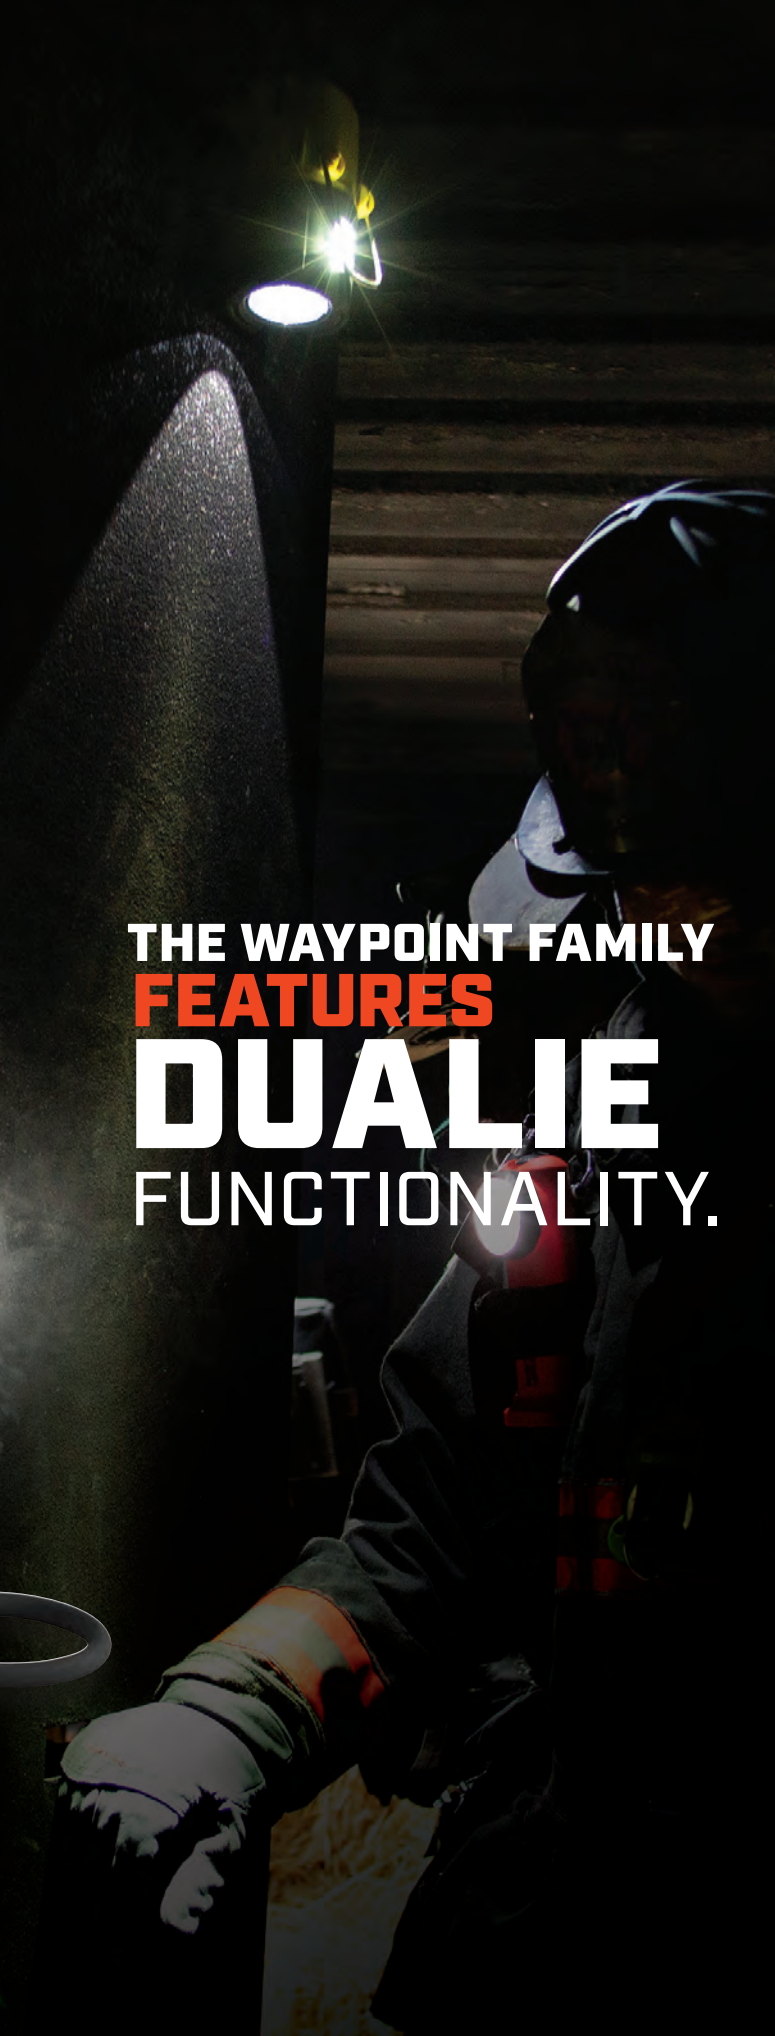

THE WAYPOINT FAMILY
FEATURES
DUALIE
 FUNCTIONALITY.

DUALIE WAYPOINT®

The Dualie Waypoint® light offers dual light technology with a forward facing spot beam and a bottom facing flood light that can be used individually or at the same time. See what's ahead of you and right in front of your feet with the Dualie Waypoint. Its bright light, which shines both ahead of you and downward, helps you avoid slips, trips and falls. Multiple hands-free uses - hang it over a door, stand it on its kickstand or hang it with integrated D-ring. The ergonomic handle hooks over any door, pipe, bar, cable or ladder rung for hands free operation. It also includes an integrated stand to make the light perfect for any lighting need. The light is sealed and floats, so it's great for wet applications.

DUALIE WAYPOINT

BATTERY: (4) "C" alkaline batteries

SIZE: 6.75" x 6.5" x 3.55"
 (17.14 x 16.5 x 9.0 cm)

WEIGHT: 2.06 lbs (934 g) w/o batteries

COLOR: Yellow



- 44940 Yellow – Wrap
- 44955 Yellow – Box

SPOT BEAM	HIGH	MEDIUM	LOW
LUMENS:	750	500	35
CANDELA:	75,000	45,000	3,200
DISTANCE:	548m	426m	113m
RUN TIME:	3h 30m	6h	125h

FLOOD BEAM	HIGH	MEDIUM	LOW
LUMENS:	500	230	25
CANDELA:	250	120	10
DISTANCE:	31m	22m	6m
RUN TIME:	5h	12h 30m	170h

BOTH LIGHTS	HIGH	MEDIUM	LOW
LUMENS:	1,000	600	75
RUN TIME:	3h	6h	55h



Push button switch with momentary and click on operation. The rotary switch selects the main/front beam, bottom/area light, or both.



LED bottom facing flood light can be used individually or with the forward facing spot beam.



Integrated stand and D-ring for hands-free lighting.

STREAMLIGHT
SIEGE SERIES



SUPER SIEGE **THE HARDEST**
WORKING
SIEGE LANTERN.

SUPER SIEGE® RECHARGEABLE LANTERN

The Super Siege rechargeable scene light/work lantern provides 360° of bright light that illuminates an entire scene. A rechargeable lithium ion battery supplies the power to charge your Streamlight flashlights, smartphones and tablets. Remove the globe cover and hang the Super Siege upside down by its D-ring for large area lighting needs. Use the Glare Guard™ to shield light from 1/2 the globe for up-close task lighting. Set it to SOS mode for emergency situations. Working in a grueling environment? No problem! A rubber base keeps it stable on slippery or uneven surfaces, and a watertight storage compartment keeps small items dry. IPX7 waterproof to 1m. It floats.

SUPER SIEGE

BATTERY: Lithium Ion Rechargeable

SIZE: 3.8" x 7.5" (9.65 x 19.05 cm)

WEIGHT: 1 lb 14 oz (867.62 g)

COLOR: Coyote or Yellow

44947 AC power cord—Coyote

44945 AC power cord—Yellow

SUPER SIEGE ACCESSORY

44951 Magnetic Base—Black

44950 Glare Guard

(1) WHITE LED	HIGH	MEDIUM	LOW
LUMENS:	1,100	550	125
RUN TIME:	5h 45m	11h 30m	36h 15m

Light output with outer globe removed.

(4) RED LEDs	HIGH	FLASH/SOS MODE	LOW
LUMENS:	2.7	2.7	1
RUN TIME:	140h	320h	348h

With **[(RED SOS)]**

Hold on/off button to activate.



A small dry storage area is provided in the light's base for all your "keep dry" needs

Rechargeable lithium ion battery supplies the power for the lantern as well as enabling you to recharge all your electronic devices from the handy USB port.



Magnetic Accessory Base



With **[(RED SOS)]**

Hold on/off button to activate.



MULTI-FUEL DESIGN:

Runs on (1) SL-B26™ battery pack or (2) CR123A

LANTERN	HIGH	MEDIUM	LOW
LUMENS:	325	170	30
RUN TIME:	4h 30m	7h 45m	25h

Red LED: 22 hours of continuous run time, 90 hours of SOS

FLASHLIGHT	HIGH	LOW
LUMENS:	300	40
CANDELA:	6,000	900
DISTANCE:	155m	60m
RUN TIME:	3h 30m	25h



The Siege X USB features a 300 lumen front spot light

SIEGE® X USB

This 2-in-1 lantern/flashlight combo provides 360° of light to illuminate a large area or a focused beam to light your path. Features three lighting modes: smooth lantern lighting; a red LED to preserve night vision and a front spot light for use as a handheld flashlight. It accepts the Streamlight SL-B26™ protected Li-Ion USB rechargeable battery pack or two CR123A lithium batteries. IPX7 waterproof to 1m submersion. A its ergonomic handle can also be used as a hang hook or use the D-ring in the base for hands-free lighting needs.

SIEGE X USB

BATTERY: (1) SL-B26 USB rechargeable battery pack or (2) CR123

SIZE: 2.12" x 4.35" (5.38 x 11.05 cm)

WEIGHT W/SL-B26: 7.2 oz (204.12 g)

WEIGHT W/CR123A: 6.8 oz (192.78 g)

COLOR: Coyote

44956 SL-B26 battery pack & 22" USB Cord—Coyote

STREAMLIGHT
SIEGE SERIES



THE SIEGE® LANTERN

The Siege is brighter, more durable, and much more versatile than other emergency/camping lanterns. It's bright enough to light up a whole campsite. It runs for over 30 hours on high, and over 12 days on low! Its handle and D-ring allow you to hang it or clip it almost anywhere, upright or inverted. It has 3 white light settings, a red light for softer, less intense light, and an SDS mode. Remove the top for brighter light. Battery indicator flashes to alert you to low battery.

THE SIEGE

BATTERY: [3] "D" size alkaline
SIZE: 3.8" x 7.25" (9.65 x 18.41 cm)
WEIGHT: 1 lb 15 oz (878 g)
COLOR: Coyote

44931 The Siege Lantern – Coyote

SIEGE ACCESSORY

44952 Magnetic Base – Black
44950 Glare Guard

[4] WHITE LEDs	HIGH	MEDIUM	LOW
LUMENS:	540	275	55
RUN TIME:	30h	70h	295h

Light output with outer globe removed.

[1] RED LED	HIGH	FLASH/SOS MODE
LUMENS:	10	10
RUN TIME:	235h	430h

Special Features:

- Floats for easy retrieval.
- Waterproof to 1 meter.
- 2 meter impact-resistance tested.
- Unbreakable lens.
- Rugged, non-slip base.

With **[(RED SOS)]**
Hold on/off button to activate.



Versatile design features rugged carry handle and D-rings clip to hang virtually anywhere.

Magnetic Accessory Base



Shown with outer globe removed.



THE SIEGE SERIES. THEY'VE GOT SURVIVAL INSTINCTS.

SIEGE® AA LANTERN

The Siege® AA lantern features one white LED, and two red LEDs (or two blue LEDs on the blue C.D.P.S. model). There are five output modes and a battery level indicator built into the on/off button. With the outer lantern globe in place, the light will float. Use the lantern with or without the outer globe cover. Remove the outer globe and hang the body upside down by the D-ring for large area lighting needs. Battery replacement is a breeze with the center post orienting the battery cover correctly every time.

SIEGE AA

BATTERY: (3) "AA" size alkaline

SIZE: 2.37" x 5.44" (6.00 x 13.82 cm)

WEIGHT: 8.8 oz (249.47 g)

MAG. MODEL WEIGHT: 9.1 oz (257.98 g)

COLOR: Coyote, Yellow, Red, Pink or Blue

- 44941 Siege AA Lantern – Coyote
- 44943 Siege AA Lantern – Yellow w/magnetic base
- 44953 Siege AA Lantern – Red (NFFF)
- 44944 Siege AA Lantern – Pink (BCRF)
- 44949 Siege AA Lantern – Blue (COPS)

SIEGE AA ACCESSORY

- 44942 Magnetic Base – Coyote

WHITE LED	HIGH	MEDIUM	LOW
LUMENS:	200	100	50
RUN TIME:	7h	15h 30m	37h

Light output with outer globe removed.

(2) RED LEDs	HIGH	FLASH/SOS MODE
LUMENS:	.7	.7
RUN TIME:	192h	288h



The yellow Siege AA has three strong magnets in the base. It's now a versatile, hands-free work light that can be attached to steel surfaces like engines, machines, or other equipment.

With **[(RED SOS)]**
Hold on/off button to activate.



See page 163 to learn how buying a light for a cause benefits these organizations.

RIGHT-ANGLE SERIES //

RIGHT-ANGLE LIGHTING

WHETHER IT'S ON THE BODY OR ON THE HELMET,
STREAMLIGHT DELIVERS THE TRUSTED OPTIONS.

Ask any firefighter what light they trust most... and the likely answer is the Streamlight Survivor. And while we're proud of that fact, we're also not one to let it rest at that. We continue to develop products that keep firefighters and industrial workers safe. Because as we all know, the work is never truly done.



SURVIVOR®



VANTAGE® II



VANTAGE®
180 X USB



POLYTAC 90X® USB

STREAMLIGHT
RIGHT ANGLE SERIES



The low profile Survivor shown at actual size.

SURVIVOR ACCESSORIES



Battery Chargers

Fits All

Battery Packs

Fits All

Charge Cords

PN

Smart Charger Holder	90116	Alkaline Battery Cartridge	90542	120V AC	22060
120V AC Fast Charger	90011	NiMH battery pack	90339	12V DC1 Car Charger	22051
Fast Charger	90118			12V DC Direct Wire	22050
DC1 Car Charger Cord/Fast Charger	90012				
DC2 Direct Wire/Fast Charger	90013				
120V AC Bank Charger	90400			Addtl Accessories	PN
12V DC Bank Charger	90401			Smoke Cutter Plug Kit	908019

THE MOST TRUSTED RIGHT ANGLE LIGHT. THIN, BRIGHT & VERSATILE. THE LEGENDARY SURVIVOR.



SURVIVOR®

The leading Class I, Div. 1 right angle, clip-on flashlight features a slim profile and a dependable clip/hook for more accurate light orientation. 4 lighting modes include high, low, flash, and a moonlight mode for low-level lighting that runs for 20 days. Spring-loaded clip easily attaches to belts and harnesses. Comes with two special, interchangeable Smoke Cutter® plugs that help create your preferred beam pattern: Black plug significantly reduces peripheral light for a tighter beam while the Amber plug reduces peripheral light and eye fatigue caused by glare. Available in alkaline and rechargeable models.

All openings are O-ring sealed for weather-resistance. IPX4 rated water-resistant. 2 meter impact resistance tested. Unbreakable, scratch-resistant polycarbonate lens. Designed for easy operation even with heavy gloves.

SURVIVOR

BATTERY: Dual power source: accepts rechargeable NiMH battery pack or (4) "AA" alkaline batteries.

SIZE: 7.6" x 2.85" x 2.87"
(17.92 x 7.24 x 7.29 cm)

NiMH WEIGHT: 18 OZ (510 g)

ALKALINE WEIGHT: 13.7 OZ (388 g)

COLOR: Orange, Yellow, or Black

YELLOW ORANGE BLACK

YELLOW	ORANGE	BLACK	
90513	90503	90523	120V AC/DC cords
90512	90502	90522	120V AC Fast Charger
90519	90509	90528	12V DC Fast Charger
90510	90500	90520	Without Charger
90541	90540	90545	Alkaline



Alkaline battery cartridge holds four "AA" alkaline batteries.

NiMH MODEL	HIGH	LOW
LUMENS:	175	60
CANDELA:	41,000	14,000
DISTANCE:	405m	237m
RUN TIME:	3h 30m	13h

Moonlight mode: 20 days of continuous run time
Flash runs 8 hours

ALKALINE MODEL	HIGH	LOW
LUMENS:	175	60
CANDELA:	41,000	14,000
DISTANCE:	405m	237m
RUN TIME:	4h	15h

Moonlight mode: 20 days of continuous run time
Flash runs 8 hours

NFPA Flashlight meets 500°F requirements of NFPA 1971-8.6 (2013)

NFPA Rack meets requirements of 1901-14.1.10.2 (2016) mounted in any position



Class I & II, Division 1, Groups C,D,E,F,G;
Class III, T4, Class 1 Zone 0 IIB
Class I, Division 2, Groups A,B,C,D; T4
Class 1 Zone 2 IIC



Permissible Flashlight
Approval No. 20-A150001-0

Interchangeable Smoke Cutter® plugs:



Black reduces peripheral light for a tighter beam

Amber reduces peripheral light and eye fatigue caused by glare



Clip/hook designed for accurate light orientation

STREAMLIGHT
RIGHT ANGLE SERIES



VANTAGE® II

Lightweight, compact and low profile, the VANTAGE® II is designed to easily attach above or below full brim Fire Helmets or Slotted Industrial Hard Hat mounts. The light features the latest in power LED technology combined with an ultra-bright blue LED safety taillight. Powered by a single lithium battery, sealed for water-resistance.

VANTAGE II

BATTERY: [1] CR123A lithium

SIZE WITH FIRE MOUNT: 2.37" x 1.16" x 2.18"
(6.01 x 2.95 x 5.54 cm)

SIZE WITH INDUSTRIAL MOUNT: 2.37" x 1.16" x 1.54"
(6.01 x 2.95 x 3.91 cm)

FIRE MOUNT WEIGHT: 3.65 oz (103.5 g)

INDUSTRIAL MOUNT WEIGHT: 2.97 oz (84.2 g)

COLOR: Black



Fire model



Large push-button switch features blue taillight LED that ensures you can be seen even from behind.

	HIGH	LOW
LUMENS:	350	135
CANDELA:	3,500	1,700
DISTANCE:	118m	80m
RUN TIME:	2h 15m	5h



Attaches securely to your helmet - above or below brim in seconds!

69331	Fire Helmet Mount & CR123A lithium battery - Box
69333	Industrial Hard Hat Mount & CR123A lithium battery - Box
ACCESSORIES	
69334	Bracket Kit - Vantage II - Fire
69336	Bracket Kit - Vantage II - Industrial
85175	Lithium Batteries—2 Pack
85180	Lithium Batteries—6 Pack
85177	Lithium Batteries—12 Pack
85179	Lithium Batteries—400 Pack

NFPA Meets requirements of NFPA 1971-8.6 (2013); 500° heat resistance test

CE Meets applicable European Community Directives



Industrial model features hard hat mount that slides into V-Guard slot.



Industrial model

VANTAGE® 180 X USB VANTAGE® 180 X

This multi-fuel, multi-function light is the most versatile rechargeable firefighter's light. It's a helmet mounted light, right angle light and a hand-held flashlight. The Vantage 180 X USB is a rechargeable system that includes a Streamlight SL-B26™ protected Li-Ion USB rechargeable battery pack with integrated USB port. The Vantage 180 X includes two CR123 batteries. Easily attaches above or below the brim of most helmets providing a bright main white LED and blue safety taillight. Quickly detaches for hand-held and clip-on right angle light with white taillight and downcast light to see what's at your feet. IPX7 waterproof.

Head articulates 180° to aim the beam.

WITH SL-B26	HIGH	LOW
LUMENS:	250	100
CANDELA:	7,200	2,650
DISTANCE:	170m	103m
RUN TIME:	5h	15h

WITH CR123	HIGH	LOW
LUMENS:	250	100
CANDELA:	7,200	2,650
DISTANCE:	170m	103m
RUN TIME:	4h	12h



Use as a helmet light. Easily attaches above or below brim. No tools necessary to quickly remove for use as a hand-held flashlight

VANTAGE 180 X USB

BATTERY: (1) SL-B26 battery pack
SIZE: 5.20" x 1.60" x 1.06"
(13.20 x 4.06 x 2.69 cm)
WEIGHT: 5.9 oz (167 g)
COLOR: Black or Orange

VANTAGE 180 X

BATTERY: (2) 3V CR123A lithium
SIZE: 5.20" x 1.60" x 1.06"
(13.20 x 4.06 x 2.69 cm)
WEIGHT: 5.5 oz (156 g)
COLOR: Black or Orange

88911	Vantage 180 X USB, SL-B26 battery pack, Helmet Bracket—Box — Orange
88913	Vantage 180 X USB, SL-B26 battery pack, Helmet Bracket—Box — Black
88901	Vantage 180 X, two CR123A Lithium Batteries, Helmet Bracket—Box — Orange
88903	Vantage 180 X, two CR123A Lithium Batteries, Helmet Bracket—Box — Black



X USB MULTI-FUEL FLEXIBILITY

**POWER UP WITH A
STREAMLIGHT SL-B26™
PROTECTED LI-ION USB
RECHARGEABLE BATTERY PACK
OR (2) CR123A LITHIUM BATTERIES**

Includes "quick release" helmet bracket and hex key.



Rear LED Taillight changes from blue to white:

- Blue LED for helmet mount use and visibility in heavy smoke
- White LED for a downcast flood light to see what's at your feet; switches from blue when head is at a 90° angle



ACCESSORIES

22010	Li-Ion Charger Kit-USB (incl. (2) SL-B26 USB batteries)
22011	Li-Ion Charger Kit-120V AC (incl. (2) SL-B26 batteries)
22100	Li-Ion Battery Charge Cradle
22070	USB Cord A to Micro 40" (101cm)
22081	USB Cord A to USB Micro 22" (55.88 cm)
22082	USB Cord Y-Split
22101	SL-B26 USB Battery
22102	SL-B26 USB Battery—2 Pack
85175	Lithium Batteries—2 Pack
85180	Lithium Batteries—6 Pack
85177	Lithium Batteries—12 Pack
85179	Lithium Batteries—400 Pack

See page 108 for more information on SL-B26 battery packs and chargers

NFPA Meets requirements of NFPA 1971-8.6 (2013); 500° heat resistance test

CE Meets applicable European Community Directives

STREAMLIGHT RIGHT ANGLE SERIES



VANTAGE®

The solution to firefighters' hands-free lighting needs. Attaches easily to helmets and hard hats, and rotates 360°. Fits snugly against helmet to prevent snags. Includes a bright tail light so you can be seen from behind even in heavy smoke (blue on black & red models, green on green model). Easy to operate with gloves. Fits both traditional and modern helmets.

VANTAGE

BATTERY: (2) 3V CR123A lithium

SIZE: 3.26" x 1.47" x 2.56"
(8.28 x 3.73 x 6.5 cm)

WEIGHT: 5.14 oz (145.7 g)

COLOR: Black, Green or Red

69140	Vantage LED Tactical Helmet Light – Black
69189	Vantage LED Tactical Helmet Light – Green
69157	Vantage LED Tactical Helmet Light – Red (NFFF)

ACCESSORIES

85175	Lithium Batteries—2 Pack
85180	Lithium Batteries—6 Pack
85177	Lithium Batteries—12 Pack
85179	Lithium Batteries—400 Pack

LUMENS:	115
CANDELA:	7,000
DISTANCE:	167m
RUN TIME:	6h



Dual direction, easy access on/off switch.

470nm ultra-bright taillight LED.

NFPA Meets requirements of NFPA 1971-8.6 (2013); 500° heat resistance test

CE Meets applicable European Community Directives



Congress created the National Fallen Firefighters Foundation to lead a nationwide effort to honor America's fallen firefighters. Since 1992, the non-profit foundation has developed and expanded programs that fulfill that mandate. Their mission is to honor and remember America's fallen fire heroes and to provide resources to assist their survivors in rebuilding their lives. For more information, visit www.firehero.org.

See page 163 to learn how buying a light for a cause benefits these organizations.

POLYTAC 90[®] X USB POLYTAC 90[®] X

Flexible, rugged and super bright, the PolyTac 90 X is built with the rigors of the job in mind. Durable construction plus a switch with built in battery life indicator will let you know when it is time to recharge your battery or replace them giving you the confidence to stay focused on the task at hand. The PolyTac 90 X USB is a rechargeable system that includes a Streamlight SL-B26™ protected Li-Ion USB rechargeable battery pack. The PolyTac 90 X includes two CR123 batteries.

POLYTAC 90 X USB

BATTERY: (1) SL-B26 battery pack

SIZE: 5.22" x 1.25" x 1"
(13.3 x 3.18 x 2.54 cm)

WEIGHT: 4.8 oz (136 g)

COLOR: Orange, Yellow or Black

POLYTAC 90 X

BATTERY: (2) 3V CR123A lithium

SIZE: 5.22" x 1.25" x 1"
(13.3 x 3.18 x 2.54 cm)

WEIGHT: 4.3 oz (122 g)

COLOR: Orange, Yellow or Black

YELLOW ORANGE BLACK

88836	88838	88835	90 X USB with SL-B26 battery
—	88837	—	90 X USB w/SL-B26 & Gear Keeper
88831	88834	88830	90 X with lithium batteries
—	88832	—	90 X w/lithium batteries & Gear Keeper

ACCESSORIES

88833	Gear Keeper®
22101	SL-B26 battery pack—1 Pack
22102	SL-B26 battery pack—2 Pack
22010	Li-Ion Battery Pack Kit—USB
22011	Li-Ion Battery Pack Kit—USB
22100	SL-B26 Battery Charge Cradle
22070	USB Cord A to Micro 40" (101cm)
22081	USB Cord A to USB Micro 22" (55.88 cm)
22082	USB Cord Y-Split
85175	CR123A Lithium Batteries—2 Pack
85180	CR123A Lithium Batteries—6 Pack
85177	CR123A Lithium Batteries—12 Pack
85179	CR123A Lithium Batteries—400 Pack

See page 108 for more information on SL-B26 battery packs and chargers

Integrated carabiner style D-ring for a variety of attachment methods



Multi-position, reversible pocket clip attaches to MOLLE, turnout gear, harnesses, etc.; offers a variety of mounting positions



Multi-function push-button head switch easy to use with gloved hands. Features battery life indicator.

Gear Keeper® Tether features spectra nylon line with 36" extension and 6 oz. retraction force.



	HIGH	MEDIUM	LOW
LUMENS:	600	260	35
CANDELA:	11,485	4,930	675
DISTANCE:	205m	135m	50m
RUN TIME: [SL-B26]	3h 30m	5h 45m	36h
RUN TIME: [CR123]	2h 45m	5h 30m	34h

X USB MULTI-FUEL FLEXIBILITY

POWER UP WITH A STREAMLIGHT
SL-B26 PROTECTED LI-ION USB
RECHARGEABLE BATTERY PACK
OR (2) CR123A LITHIUM BATTERIES



**WHETHER YOU'RE WORKING ON THE FLOOR
OR OVERHEAD, THE
KNUCKLEHEAD
IS YOUR PARTNER.**

**STREAMLIGHT TASK-SPECIFIC TECHNOLOGY:
CHOOSE THE LIGHT INTENSITY ALLOWING YOU TO
CHOOSE THE RIGHT LIGHT FOR THE JOB.**



**AIM IT ANYWHERE //
WITH AN ARTICULATING HEAD.**

**ATTACH IT TO STEEL //
WITH ITS MAGNET.**



**CLIP IT ANYWHERE //
WITH A SPRING-LOADED CLIP.**
(ORANGE MODEL.)



**HANG IT ANYWHERE //
WITH AN INTEGRATED
STOWABLE HOOK.** (YELLOW & BLACK MODELS.)



KNUCKLEHEAD® FLOOD

A lightweight, rechargeable, hand-held work light that hangs or attaches a variety of ways to flood your entire work area with light. Even light pattern is easy on your eyes. Articulating head rotates 360°, making it easy to aim light where it's needed. Removable magnet. Unbreakable, anti-scratch, O-ring sealed lens. IPX4 rated for water-resistance. All openings are O-ring sealed. 2 meter impact-resistance tested. Orange model comes with clip; integrated hook on yellow and black models.

KNUCKLEHEAD FLOOD

BATTERY: Dual power source: accepts rechargeable NiMH battery pack or (4) "AA" alkaline batteries

SIZE: 9.2" x 2.85" x 2.75" (23.4 x 7.2 x 7 cm)

NiMH WEIGHT: 1 lb 7.1 oz (655 g)

ALKALINE WEIGHT: 1 lb 2.3 oz (519 g)

COLOR: Orange, Yellow, or Black

YELLOW ORANGE BLACK

90627	90657	90607	Charger/Holder and 120V AC & 12V DC cords
90622	—	90602	120V AC Charger/Holder
90626	—	90606	12V DC
90631	90661	90611	120V AC Fast Charger
90640	90670	90620	12V DC Fast Charger
90621	90651	90601	without Charger
90642	90644	90641	Alkaline Model

Orange model comes with Clip, Black & Yellow models come with Hook

	HIGH	LOW
LUMENS:	200	63
CANDELA:	1,150	350
DISTANCE:	68m	37m
RUN TIME:	3h 30m	16h

Moonlight mode: 20 days of continuous run time
Flash: 8 hours continuous time



Class I, Div. 2, Grps A, B, C, D,
Class II, Div. 2, Grps F, G
Class III T4

NFPA

Rack meets requirements of 1901-14.1.10.2 (2016) mounted in any position



	HIGH	LOW
LUMENS:	180	55
CANDELA:	11,000	3,300
DISTANCE:	210m	115m
RUN TIME:	3h 30m	16h

Moonlight mode: 20 days of continuous run time
Flash: 8 hours continuous time

Spring-loaded clip attaches to turn-out gear for convenient hands-free lighting.



Class I, Div. 2, Grps A, B, C, D,
Class II, Div. 2, Grps F, G
Class III T3C

NFPA

Rack meets requirements of 1901-14.1.10.2 (2016) mounted in any position



Powerful magnet adheres to steel surfaces.

KNUCKLEHEAD® SPOT

Its far-reaching beam helps locate hazards or victims from a distance. Articulating head makes it easy to aim light where it's needed. Powerful, removable magnet. Smoke-cutting beam. Spring-loaded clip for easy attachment to turnout gear and uneven surfaces. 4 modes include high, low, flash and a moonlight mode for 20-day runtime. Features are designed to give firefighters added flexibility. Unbreakable, anti-scratch, O-ring sealed lens. IPX4 rated for water-resistance. 2 meter impact-resistance tested. All openings are O-ring sealed.

KNUCKLEHEAD SPOT

BATTERY: Dual power source: accepts rechargeable NiMH battery pack or (4) "AA" alkaline batteries.

SIZE: 9.2" x 2.85" x 2.75" (23.4 x 7.2 x 7 cm)

NiMH WEIGHT: 1 lb 7.1 oz (655 g)

ALKALINE WEIGHT: 1 lb 2.3 oz (519 g)

COLOR: Orange

90757	120V AC/12V DC - Orange
90761	120V AC Fast Charge - Orange
90770	12V DC Fast Charge - Orange
90751	Light Only (without charger) Orange
90744	Alkaline Model - Orange

KNUCKLEHEAD ACCESSORIES

Battery Chargers	Fits All	Battery Packs	Fits All	Charge Cords	PN
Smart Charger Holder	90116	Alkaline Battery Cartridge	90542	120V AC	22060
120V AC Fast Charger	90011	NiMH battery pack	90339	12V DC1 Car Charger	22051
Fast Charger	90118			12V DC Direct Wire	22050
DC1 Car Charger Cord/Fast Charger	90012				
DC2 Direct Wire/Fast Charger	90013				
120V AC Bank Charger	90400				
12V DC Bank Charger	90401				

SAFETY-RATED SERIES //

**SAFETY-RATED LIGHTING SPECIALISTS
BECAUSE YOU DON'T GET TO CHOOSE
WHERE IT'S GOING TO BE DARK.**

Streamlight builds more safety-rated lights to give you more options in hazardous locations. With our comprehensive product line of Dualies, ProPolymers, Knuckleheads and headlamps – you have a full selection of safety-rated lights no matter your lighting need... right-angle, wearable or with laser pointing options.



KNUCKLEHEAD®
HAZ-LO®
SPOT



3AA PROPOLYMER®
HAZ-LO®



DUALIE®
RECHARGEABLE
MAGNET



STREAMLIGHT SAFETY-RATED SERIES.

// DIFFERENT LIGHTS FOR DIFFERENT HAZARDOUS LOCATIONS.

The National Electric Code (NEC) defines hazardous locations by “class” and “division.” There are three classes:



CLASS I locations are made hazardous by the presence of flammable gases, liquids or vapors.



CLASS II locations are hazardous because combustible dusts are present.



CLASS III locations contain easily ignitable fibers or flyings.

The “Division” designation refers to the likelihood that ignitable concentrations of flammable materials are present. There are two divisions:



DIVISION 1 designates an environment where ignitable concentrations of flammable gases, liquids, vapors or dusts can exist some of the time or all of the time under normal operating conditions, or where easily ignitable fibers and flyings are manufactured, handled or used.



DIVISION 2 locations are where ignitable concentrations are not likely to exist under normal operating conditions or where Class 3 materials are stored or handled.

Hazardous classes are further defined by “groups” based on the physical properties of their combustible materials. These groups include (but are not limited to):



GROUP A Acetylene
GROUP B Hydrogen
GROUP C Ethylene, carbon monoxide
GROUP D Propane, gasoline, naphtha, benzene, butane, ethyl alcohol, acetone, methane



GROUP E Metals including aluminum, magnesium (Div. 1 only)
GROUP F Carbonaceous dusts including coal, carbon black, coke
GROUP G Dusts not included in E and F including wood, plastics, flour, starch or grain dusts



STREAMLIGHT GIVES YOU MORE SAFETY-RATED LIGHTS FOR MORE OPTIONS IN HAZARDOUS LOCATIONS.

Streamlight flashlights are tested and certified by the world's leading independent laboratories — including Underwriters Laboratories, ATEX, Demko, and the Mine Safety and Health Administration (MSHA). This testing is your assurance that the Streamlight flashlight you choose will be safe in the environment(s) in which you'll be using it.



// STREAMLIGHT'S HAZ-LO LIGHTS - 2 STANDARDS PROVIDE DIFFERENT PATHS TO THE SAME RESULT: A DIVISION 1 RATING!

When working in a Division 1 area, we expect explosive atmospheres to be present. Streamlight's HAZ-LO product line is suitable for use in Division 1 areas. Streamlight uses different protection standards and testing at Nationally Recognized Test Labs (NRTL) to achieve the Division 1 rating that is common to all Streamlight HAZ-LO Lighting. This is the best possible performance while ensuring that your flashlight will not become an ignition source. ANSI/UL 783 is the specific standard for flashlights used in hazardous locations. ANSI/UL 913 is the intrinsically safe standard for general electronic equipment. While either standard can direct certification to Division 1 level, it is important to note Class, Group and Temperature code requirements to select the correct flashlight for specific applications.

// WHY ARE SAFETY RATINGS IMPORTANT?

There are several types of locations in which it can be extremely dangerous to use any light that has not been specifically designed — and approved — for that kind of location. These are areas where fire or explosion hazards may exist due to the presence of flammable gases, liquids, vapors, dusts, or ignitable fibers or flyings. If you will be using a flashlight in any potentially hazardous location, it is critical that your light be safety-rated for that specific kind of environment.

// ATEX RATINGS

Streamlight also offers safety-rated lights that comply with the European Union (EU) Directive 2014/34/EU (ATEX) for products intended for use in potentially explosive atmospheres within the EU member countries. Please visit our website, streamlight.com for more information on ATEX-rated products. We also have a catalog of ATEX-rated products available upon request.



See our full line of safety-rated headlamps on pages 128-143




STREAMLIGHT
DUALIE SERIES

THE DUALIE® FAMILY OF LIGHTS
DIV. 1, INTRINSICALLY SAFE,
DUAL BEAMS,
HANDS-FREE & INCREDIBLY VERSATILE.

DUAL BEAM DESIGN:



The Dualie design allows you to see what's ahead of you and right in front of your feet. Its bright light, which shines both ahead of you and downward, helps you avoid slips, trips and falls.



The Dualie Laser features a simultaneous spot beam and laser pointer allowing you to illuminate the work area and pinpoint out-of-reach objects.

DUALIE® RECHARGEABLE

The Dualie® Rechargeable features a lithium ion battery and dual beams — forward facing LED spot beam and a side facing LED flood light that can be used individually or at the same time for enhanced safety. Integrated, non-protruding spring loaded belt clip contained within body outline.

DUALIE RECHARGEABLE

BATTERY: Lithium Ion Rechargeable
SIZE: 7" x 1.86" x 1.06" (17.78 x 4.72 x 2.69 cm)
WEIGHT: 6.8 oz (193 g)
COLOR: Yellow or Black

YELLOW BLACK

68732	68733	White LED/120V/100V AC—Box
68734	68735	White LED/12V DC Direct Wire—Box
68730	68731	Light Only—Box



Class I & II, Div. I, Groups A,B,C,D,E,F,G
Class III, CL I, ZN O, IIC
T-Code: T4; Exia

Features a forward facing LED spot beam and a side facing LED flood light that can be used individually or at the same time for enhanced safety.



	SPOT	FLOOD	COMBINED
LUMENS:	180	105	275
CANDELA:	11,500	60	—
DISTANCE:	171m	18m	—
RUN TIME:	7h 15m	13h 30m	5h 30m

THE LIGHTS THAT WORK. ARE ALSO THE LIGHTS THAT CHARGE. MEET THE DUALIE RECHARGEABLES.

DUALIE® RECHARGEABLE MAGNET

The Dualie® Rechargeable Magnet features all the great versatility and attributes of the standard Dualie Rechargeable and also incorporates two magnets into its integrated, non-protruding spring loaded belt clip for hands-free use.

DUALIE RECHARGEABLE MAGNET

BATTERY: Lithium Ion Rechargeable

SIZE: 7.50" x 1.86" x 1.06" (19.05 x 4.72 x 2.69 cm)

WEIGHT: 7.1 oz (201g)

COLOR: Yellow or Black

YELLOW BLACK

68793	68794	White LED/120V/100V AC—Box
68795	68796	White LED/12V DC Direct Wire—Box
68785	68796	Light Only—Box



Class I & II, Div. I, Groups A, B, C, D, E, F, G
Class III, CL I, ZN 0, IIC
T-Code: T4; Exia



Features a forward facing LED spot beam and a side facing LED flood light that can be used individually or at the same time for enhanced safety.



Integrated magnet for hands-free use



	SPOT	FLOOD	COMBINED
LUMENS:	180	105	275
CANDELA:	11,500	60	—
DISTANCE:	171m	18m	—
RUN TIME:	7h 15m	13h 30m	5h 30m

ACCESSORIES FOR ALL DUALIE RECHARGEABLE MODELS

68792	Lithium ion battery - Dualie Rechargeable
68790	Charger Holder
68789	Bank Charger
22080	12V DC Direct Wire USB Cord
22089	12V DC USB Adapter
22070	40" USB Cord
22071	120V AC USB Cord
68089	Poly Mount Kit
99075	Rubber Helmet Strap
68085	Helmet Mount



DUALIE® 2AA

The Dualie® 2AA is an intrinsically safe, high performance, battery powered multi-function LED flashlight. The flashlight features a forward facing LED spot beam and a side facing LED flood light that can be used individually or at the same time for enhanced safety. The flashlight has opposing switches for easy user activation of desired function(s). Includes removable, reversible clip and integrated magnet.

	SPOT	FLOOD	COMBINED
LUMENS:	115	115	175
CANDELA:	3,100	75	—
DISTANCE:	111m	17m	—
RUN TIME:	24h	24h	15h



Integrated magnet for hands-free use



Features a forward facing LED spot beam and a side facing LED flood light that can be used individually or at the same time for enhanced safety.

SGS
Class I & II, Div. I, Groups A, B, C, D, E, F, G;
Class III, CL I, ZN 0, IIC
T-Code: T4; Exia

DUALIE 2AA

BATTERY: 2 “AA” size alkaline
SIZE: 6.10” x 1.34” x .87” (15.5 x 3.4 x 2.2 cm)
WEIGHT: 3.9 oz (111 g)
COLOR: Yellow or Black

YELLOW BLACK

67750	67752	White LED/alkaline batteries – Clam
67751	67753	White LED/alkaline batteries – Box

ACCESSORIES

68089	Poly Mount Kit
99075	Rubber Helmet Strap

DUALIE® 3AA

One light, two beams: choose one spot beam or one flood light or both. The 3AA Dualie® provides two types of illumination for multi-directional lighting and special uses. Intuitive activation allows you to use either beam or both at the same time. This intrinsically safe flashlight allows you to see your entire work area and helps you avoid slips, trips, and falls.

	SPOT	FLOOD	COMBINED
LUMENS:	140	140	245
CANDELA:	7,300	80	—
DISTANCE:	171m	18m	—
RUN TIME:	18h	18h	9h



Features a forward facing LED spot beam and a side facing LED flood light that can be used individually or at the same time for enhanced safety.

SGS
Class I & II, Div. I, Groups A, B, C, D, E, F, G;
Class III, CL I, ZN 0, IIC
T-Code: T4; Exia

DUALIE 3AA

BATTERY: 3 “AA” size alkaline
SIZE: 7.00” x 1.86” x 1.06” (17.78 x 3.86 x 2.69 cm)
WEIGHT: 6.8 oz (193 g)
COLOR: Yellow or Black

YELLOW BLACK

68750	68752	White LED/alkaline batteries
68751	68753	White LED/without batteries – Box

ACCESSORIES

68089	Poly Mount Kit
99075	Rubber Helmet Strap
68085	Helmet Mount



Permissible Flashlight
App. No. 20-A160001-0
Tested for use in methane-air mixtures only

DUALIE SERIES: DOUBLE THE FUNCTIONALITY

DUALIE® 3AA MAGNET

The Dualie® 3AA Magnet features all the great versatility and attributes of the standard Dualie 3AA but also incorporates two magnets into its integrated, non-protruding spring loaded belt clip for hands-free use.

	SPOT	FLOOD	COMBINED
LUMENS:	140	140	245
CANDELA:	7,300	80	—
DISTANCE:	171m	18m	—
RUN TIME:	18h	18h	9h



Integrated magnet for hands-free use



Features a forward facing LED spot beam and a side facing LED flood light that can be used individually or at the same time for enhanced safety.



Class I & II, Div. I, Groups A,B,C,D,E,F,G
Class III, CL I, ZN O, IIC
T-Code: T4; Exia



Permissible Flashlight
App. No. 20-A160001-0
Tested for use in methane-air mixtures only

DUALIE 3AA MAGNET

BATTERY: 3 "AA" size alkaline

SIZE: 7.50" x 1.86" x 1.06" (19.05 x 3.86 x 2.69 cm)

WEIGHT: 7.1 oz (201 g)

COLOR: Yellow or Black

YELLOW BLACK

68780	68781	White LED/alkaline batteries, lanyard
68782	68783	White LED/alkaline batteries, lanyard—Box

ACCESSORIES

68089	Poly Mount Kit
99075	Rubber Helmet Strap
68085	Helmet Mount

DUALIE® 3AA LASER

The Dualie® 3AA Laser is an intrinsically safe, high performance, battery powered multi-function LED flashlight. The Dualie Laser model features forward facing LED spot beam and laser pointer that can be used individually or at the same time for location identification. Opposing switches for easy user activation of desired functions.

	LED	LASER	COMBINED
LUMENS:	150	<5mW	—
CANDELA:	7,700	—	—
DISTANCE:	175m	—	—
RUN TIME:	17h	70h	12h



Simultaneous spot beam and laser pointer allow you to illuminate the work area and pinpoint out-of-reach objects.



Class I & II, Div. I, Groups A,B,C,D,E,F,G
Class III, CL I, ZN O, IIC
T-Code: T4; Exia



Permissible Flashlight
App. No. 20-A160001-0
Tested for use in methane-air mixtures only

DUALIE 3AA LASER

BATTERY: 3 "AA" size alkaline

SIZE: 7.00" x 1.86" x 1.06" (17.78 x 3.86 x 2.69 cm)

WEIGHT: 6.8 oz (193 g)

COLOR: Yellow or Black

YELLOW BLACK

68760	68762	White LED/Laser/alkaline batteries
-------	-------	------------------------------------

ACCESSORIES

68089	Poly Mount Kit - universal mounting via MSA V-Gard slot or self-adhesive mount
99075	Rubber Helmet Strap

STREAMLIGHT PROPOLYMER SERIES



2AAA PROPOLYMER® HAZ-LO®

The 2AAA ProPolymer® HAZ-LO® is an extremely durable, alkaline battery-powered, intrinsically safe flashlight. This light offers a push-button tailswitch for momentary on or on-off operation and integrated pocket clip.

2AAA PROPOLYMER HAZ-LO

BATTERY: 2 "AAA" size alkaline

SIZE: 5.40" x 1.00" x .66" (13.7 x 2.5 x 1.7 cm)

WEIGHT: 1.9 oz (54 g)

COLOR: Yellow or Black

66500 2AAA HAZ-LO with alkaline batteries — Clam — Yellow

66505 2AAA HAZ-LO with alkaline batteries — Box — Yellow

66501 2AAA HAZ-LO with alkaline batteries — Clam — Black

66506 2AAA HAZ-LO with alkaline batteries — Box — Black

ACCESSORIES

66029 Nylon Holster

LUMENS:	60
CANDELA:	800
DISTANCE:	57m
RUN TIME:	16h



Class I, II, Division 1, Groups A, B, C, D, E, F, G;
Class III; CL I, ZN O, IIC; T-Class: T4A



2AA PROPOLYMER® HAZ-LO®

This virtually indestructible safety-rated flashlight is big on brightness and long on run time, but small enough to fit in a pocket or even strap on a helmet. Provides a focused beam with optimum peripheral illumination. O-ring sealed construction. IPX7 rated waterproof to 1 meter for 30 minutes.

2AA PROPOLYMER HAZ-LO

BATTERY: 2 "AA" size alkaline

SIZE: 6.4" x 1.32" x .89" (16.26 x 3.35 x 2.26 cm)

WEIGHT: 3.6 oz (100 g)

COLOR: Yellow or Black

67101 2AA HAZ-LO with alkaline batteries — Yellow

67100 2AA HAZ-LO with alkaline batteries — Black

ACCESSORIES

99075 Rubber Helmet Strap

74903 Red Safety Wand

74904 Yellow Safety Wand

74913 Glow-In-The-Dark Safety Wand

85905 Nylon Holster

68089 Poly Mount Kit - universal mounting via
MSA V-Gard slot or self-adhesive mount

LUMENS:	65
CANDELA:	2,300
DISTANCE:	96m
RUN TIME:	24h



Class I, II, Division 1, Groups A, B, C, D, E, F, G;
Class III; T-Class: T4



Permissible Flashlight. Approval No. 20-A140002-0.
Tested for Intrinsic Safety in Methane-Air mixtures only.



Rubber
Helmet
Strap

STREAMLIGHT STORIES...

“MY 4AA PROPOLYMER MELTED & MUTATED. BUT IT STILL WORKS!”

Your flashlights are amazing! I was using a 4AA ProPolymer along with a torch for preheating. The light got too close to the torch, the torch melted the flashlight ... but it still works! Thanks and please continue making great durable products.

Jason Palmer
Alberta, Canada

4AA PROPOLYMER® LED

Its soft, diffused light is perfect for up close work, and with 155 hrs. of run time, this safety-rated light is always ready. Contains seven ultra-bright LEDs. IP65 rated, waterproof, dust-resistant. Unbreakable, scratch-resistant lens.

4AA PROPOLYMER LED

BATTERY: 4 “AA” size alkaline

SIZE: 6.5" x 1.63" x 1.34" (16.51 x 4.14 x 3.4 cm)

WEIGHT: 6.3 oz (178.6 g)

COLOR: Yellow or Black

YELLOW BLACK

68202	68302	White LEDs/alkaline batteries – Clam packaged
68201	68301	White LEDs/alkaline batteries – in box
68200	68300	White LEDs w/o alkaline batteries – in box

LUMENS: 67
RUN TIME: 155h



Class I, Div. 1, Groups C, D;
Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T3C



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T3C



Permissible Flashlight
App. No. 10C-658-0
Tested for use in methane-air
mixtures only



4AA PROPOLYMER® LUX

This safety-rated light has a long-reaching, bright beam and an ergonomic design for comfortable handling. Unbreakable, scratch-resistant lens. IP67 rated; waterproof to 1 meter for 30 minutes. 1 meter impact-resistance tested. Corrosion-proof.

4AA PROPOLYMER LUX

BATTERY: 4 “AA” size alkaline

SIZE: 7" x 1.48" x 1.69" (17.8 x 3.76 x 4.29 cm)

WEIGHT: 7.6 oz (216 g)

COLOR: Yellow or Black

YELLOW BLACK

68244	68344	4AA Lux Div. 2 w/alkaline batteries
68602	68702	4AA Lux Div. 1 w/alkaline batteries

ACCESSORIES

75904	Yellow Safety Wand
75903	Red Safety Wand
75902	Blue Safety Wand
75908	White Safety Wand
75913	Glow-In-The-Dark Safety Wand
68085	Helmet Mount
68089	Poly Mount Kit - universal mounting via MSA V-Gard slot or self-adhesive mount

LUMENS: 100
CANDELA: 4,200
DISTANCE: 130m
RUN TIME: 6h



Class I & II, Div. 1, Groups C, D, F & G;
Class I, Div. 2, Groups A, B, C, D;
Class III, T4



Class I & II, Div. 1, Groups C, D, F & G;
Class III, T4 Exia
Non-incendive:
Class I, Div. 2, Groups A, B, C, D



Permissible Flashlight
App. No. 20-A060002-0
Tested for use in methane-air
mixtures only



4AA Lux Div. 1

4AA Lux Div. 2



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T3C (142 C)



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T3C (142 C)



Safety Wands



Helmet Mount



Helmet Mount



Rubber Helmet Strap



Poly Mount Kit

STREAMLIGHT PROPOLYMER SERIES

4AA PROPOLYMAX®

The brightest light in our ProPolymer® series stands up to the toughest environments. Produces a tight beam with optimum peripheral illumination. Can be used with a belt clip or attaches to a hard hat. Sealed switch design protects it from corrosion caused by battery leakage. Unbreakable, scratch-resistant lens. Features TEN-TAP® programming, allowing user to select the order in which light modes come on. IP67 rated for dust-tight and waterproof to 1 meter for 30 minutes. IPX4 for water spray. Non conductive; corrosion-proof.

4AA PROPOLYMAX

BATTERY: 4 "AA" size alkaline

SIZE: 7" x 1.05" x 1.5"
(17.78 x 2.67 x 3.81 cm)

WEIGHT: 8.2 OZ (233 g)

COLOR: Yellow, Black or Orange

68820 Alkaline batteries - Yellow

68821 Alkaline batteries - Black

68822 Alkaline batteries - Orange

ACCESSORIES

68088 Belt Clip - fits 4AA ProPolymax

68089 Poly Mount Kit - universal mounting via
MSA V-Gard slot or self-adhesive mount

	HIGH	LOW
LUMENS:	300	50
CANDELA:	17,000	2,500
DISTANCE:	261m	100m
RUN TIME:	2h 45m	24h

Strobe runs 6 hours

TEN-TAP® Programmable switch allows user selection of one of three different programs:

- high/low/strobe (factory default)
- high only
- low/high



Poly Mount Kit

Belt Clip



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T4



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T4

3C PROPOLYMER® LED

10 ultra-bright LEDs provide lots of bright white light and an extended run time - up to 336 hrs! Safety-rated for use in hazardous locations. Unbreakable, scratch-resistant lens. Waterproof.

3C PROPOLYMER LED

BATTERY: 3 "C" size alkaline

SIZE: 8.55" x 1.95" x 1.48"
(21.72 x 4.95 x 3.76 cm)

WEIGHT: 13.5 OZ (382.73 g)

COLOR: Yellow or Black

33202 Without alkaline batteries - Yellow

33302 Without alkaline batteries - Black

ACCESSORIES

33903 Red Wand

33908 White Wand

25090 Holster

LUMENS:	85
RUN TIME:	336h



Permissible Flashlight
App. No. 10C-658-0
Tested for use in methane-air
mixtures only



Class I, Div. 1, Group D;
Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T3A



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T3A



3C PROPOLYMER® HAZ-LO®

An intrinsically safe, high-performance flashlight for hazardous locations. Produces a smooth, uniform beam with optimum peripheral illumination. Virtually indestructible body. Resistant to chemicals and solvents. Sealed switch design protects it from corrosion caused by battery leakage. Unbreakable, scratch-resistant lens. 3 meter impact-resistance tested. IP67 rated for dust-tight and waterproof to 1 meter for 30 minutes. IPX4 for water spray. Anti-static and non-conductive.

3C PROPOLYMER HAZ-LO

BATTERY: 3 "C" size alkaline

SIZE: 9.3" x 1.46" x 2.08"
(23.62 x 3.71 x 5.28 cm)

WEIGHT: 13.9 OZ (394 g)

COLOR: Yellow or Orange

33820 3C ProPolymer HAZ-LO - Yellow

33822 3C ProPolymer HAZ-LO - Orange

ACCESSORIES

25090 Holster

LUMENS:	150
CANDELA:	7,000
DISTANCE:	167m
RUN TIME:	18h



Permissible Flashlight
App. No. 20-A130003-0
Tested for Intrinsic Safety in
Methane-Air mixtures only



Class I, Div 1, Groups A, B, C, D;
Class II, Div. 1, Groups E, F, G;
Class III, T4 Exia



**STREAMLIGHT
PROPOLYMER SERIES**



3AA PROPOLYMER® HAZ-LO®

The 3AA ProPolymer HAZ-LO features a strong blend of performance and safety ratings. Intrinsically safe for use in hazardous locations. Produces a tight beam with optimum peripheral illumination. Resistant to chemicals and solvents. Combination of visual and mechanical polarity protection ensures correct installation of batteries. Consistent performance throughout battery life. Unbreakable, scratch-resistant lens. IP67 rated for dust-resistance. Waterproof to 1 meter for 30 minutes.

3AA PROPOLYMER HAZ-LO

BATTERY: 3 "AA" size alkaline

SIZE: 7.0" x 1.05" x 1.50" (17.78 x 2.67 x 3.81 cm)

WEIGHT: 7.5 oz (213 g)

COLOR: Yellow, Black or Orange

YELLOW BLACK ORANGE

68720	68721	68722	HAZ-LO with alkaline batteries - Clam
68723	68724	—	HAZ-LO with alkaline batteries - Box
68270	—	—	Helmet Lighting Kit - 3AA HAZ-LO with white LED, alkaline batteries, helmet mount, helmet band, clam packaged

ACCESSORIES

68085	Helmet Mount
99075	Rubber Helmet Strap
68088	Belt Clip
68089	Poly Mount Kit - universal mounting via MSA V-Gard slot or self-adhesive mount

LUMENS:	120
CANDELA:	14,000
DISTANCE:	237m
RUN TIME:	6h 30m



Helmet Mount



Rubber Helmet Strap



Helmet Lighting Kit



Poly Mount Kit



Permissible Flashlight
App. No. 20-A140003-0
Tested for Intrinsic Safety in
Methane-Air mixtures only



Class I, Div 1, Groups A, B, C, D;
Class II, Div 1, Groups E, F, G;
Class III, T4 Exia

THESE LIGHTS ARE ALWAYS READY FOR HAZARDOUS DUTY.

3N PROPOLYMER® LED

Lightweight, alkaline battery-powered personal light with 3 ultra-bright LEDs. Long run time. Impact-resistant body and face cap. Unbreakable, polycarbonate scratch-resistant lens. Push-button tail switch for momentary and on-off operation.

3N PROPOLYMER LED

BATTERY: 3 "N" size alkaline

SIZE: 5.25" x .96" x .69"
(13.33 x 2.44 x 1.75 cm)

WEIGHT: 2.1 OZ (59.54 g)

COLOR: Yellow or Black

62202	Alkaline batteries – Yellow
62302	Alkaline batteries – Black

LUMENS:	30
CANDELA:	300
DISTANCE:	35m
RUN TIME:	10h



Class I, II, Div. 1, Groups A,B,C,D,E,F,G;
Class III, Exia, T4A Classified



POLYSTINGER® LED HAZ-LO®

If you need a Class 1, Div. 1 rated light with the cost savings of a rechargeable, the PolyStinger LED HAZ-LO is the light you need. Not only does it provide a bright-white light, it is also intrinsically safe and has an unbreakable, scratch resistant lens. It's O-ring sealed and is IPX4 rated for water resistance and is 3 meter impact resistance tested.

POLYSTINGER LED HAZ-LO

BATTERY: NiCd

SIZE: 10.2" x 1.76" x 1.34"
(25.9 x 4.47 x 3.4 cm)

WEIGHT: 13.5 OZ (382 g)

COLOR: Black or Yellow

YELLOW BLACK

76412	76442	120V AC/12V DC
76411	76441	12V DC
76410	76440	Without Charger

ACCESSORIES

76409	Lanyard
75928	Loop Holster
75906	Ring Holder
76375	NiCd Battery Stick
75400	5 Unit Bank Smart Charger 120V
75105	Smart Charger
22060	120V AC Charge Cord
22051	DC1 Charge Cord
22050	DC2 Direct Wire Charge Cord

	HIGH	LOW
LUMENS:	130	50
CANDELA:	15,000	5,700
DISTANCE:	245m	151m
RUN TIME:	4h	12h

Moonlight mode: 20 days of continuous run time



Lanyard Ring
with lanyard for tail cap.




Class I & II, Division 1, Groups C,D,F,G;
Class I, Division 2, Groups A,B,C,D.;
Class III; 138 C, T-Code: T3C



Special Features:

- Non-conductive, corrosion-resistant body.
- IPX4-rated for water-resistance.
- 3 meter impact-resistance tested.

STREAMLIGHT
KNUCKLEHEAD SERIES

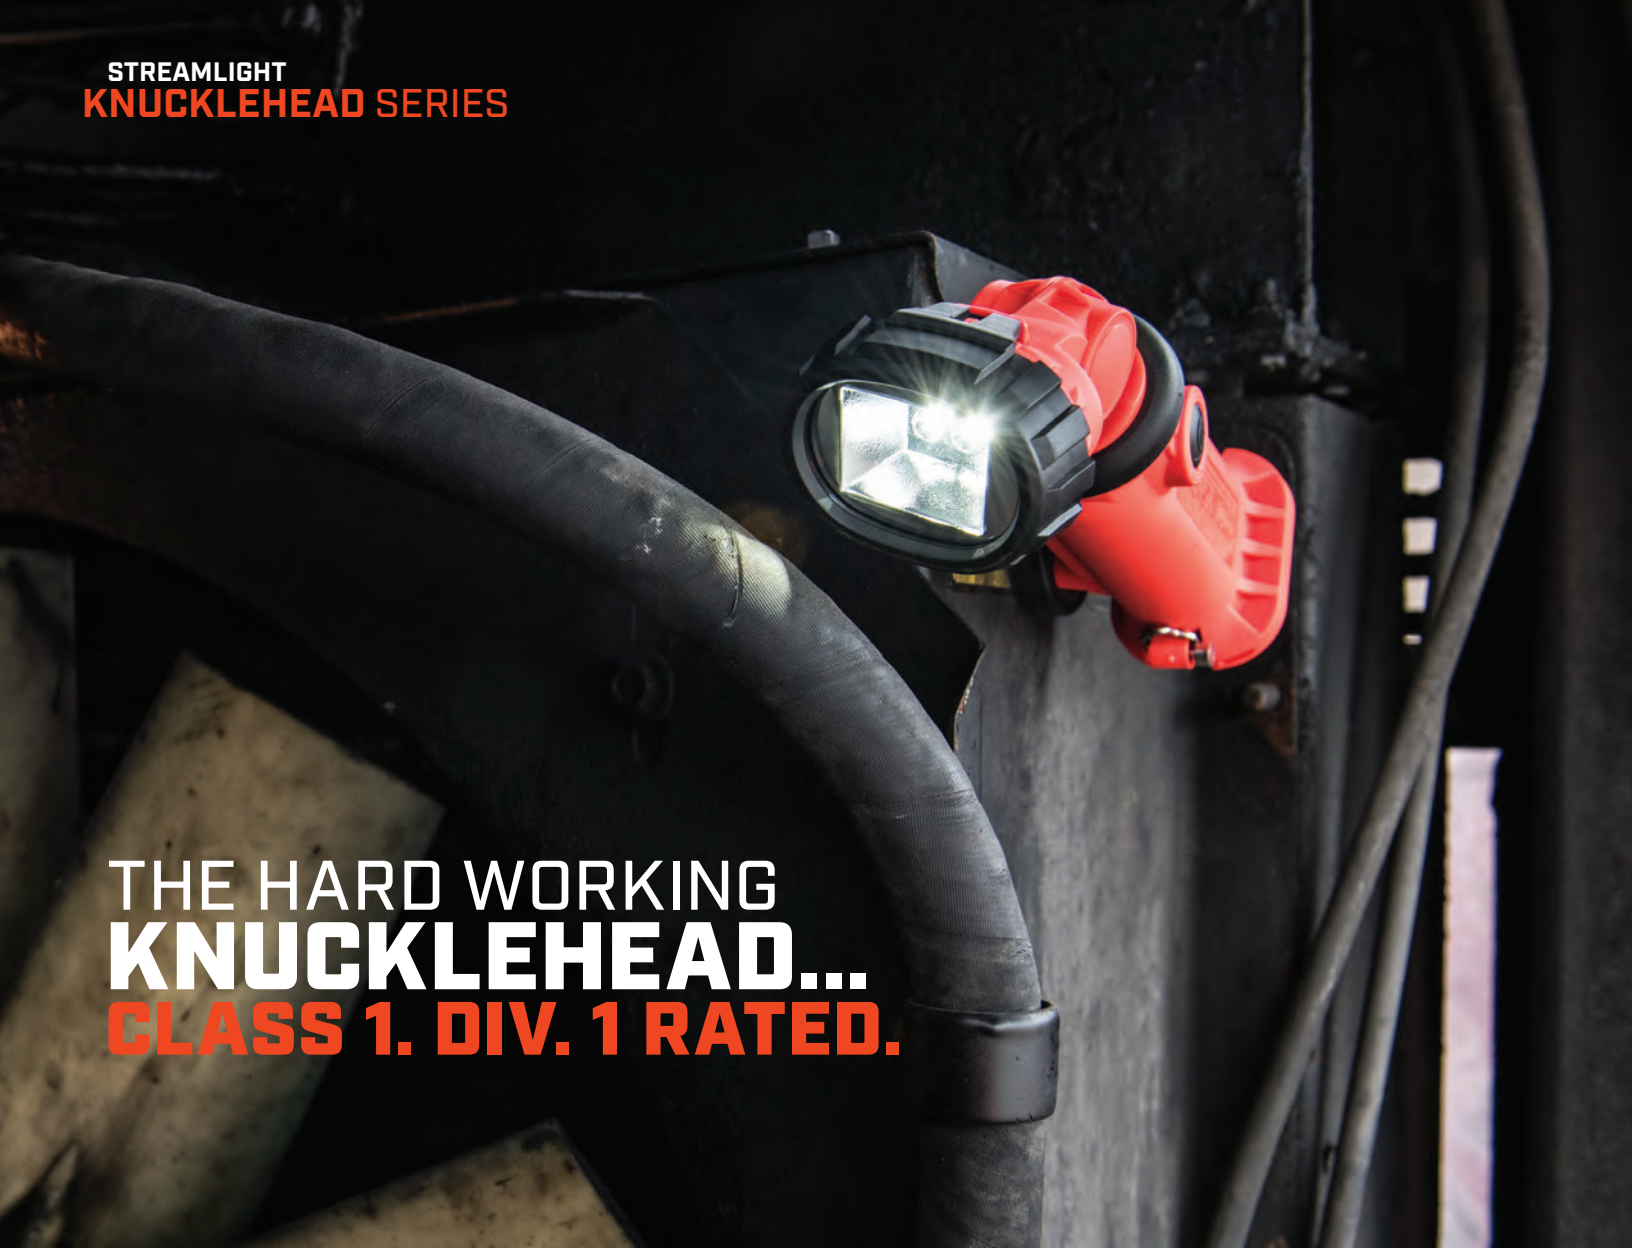

**THE HARD WORKING
KNUCKLEHEAD...
CLASS 1. DIV. 1 RATED.**

STREAMLIGHT HAZ-LO® SERIES: // WHAT IS “INTRINSICALLY SAFE?”

Streamlight offers a variety of lights that are safety-rated for hazardous environments. We even have several lights that are “intrinsically safe” – these are lights that have been tested to ANSI/U.L. - Std-913 and found to be safe for use in a Division 1 classified environment.



KNUCKLEHEAD ACCESSORIES



**Battery
Chargers**

Fits All

Battery Packs

Fits All

Charge Cords

PN

Smart Charger Holder	90116	Alkaline Battery Cartridge	90542	120V AC	22060
120V AC Fast Charger	90011	NiMH battery pack	90339	12V DC1 Car Charger	22051
Fast Charger	90118			12V DC Direct Wire	22050
DC1 Car Charger Cord/Fast Charger	90012				
DC2 Direct Wire/Fast Charger	90013				
120V AC Bank Charger	90400				
12V DC Bank Charger	90401				

KNUCKLEHEAD® HAZ-LO® FLOOD

Class I & II, Div. 1 safety-approved work light with articulating head that hangs or attaches a variety of ways. Its soft flood pattern with 2 LEDs illuminates your work area, yet the beam is easy on your eyes. Articulating head rotates 210°. Includes high, low, moonlight and flash modes. Removable magnet. Yellow model features an integrated hook for hands-free use. Orange model has a clip that clamps to objects or turn-out gear. IPX4 rated for water-resistance. 2 meter impact-resistance tested.

KNUCKLEHEAD HAZ-LO FLOOD

BATTERY: Dual power source: accepts rechargeable NiMH battery pack or (4) "AA" alkaline batteries

SIZE: 9.2" x 2.85" x 2.75" (23.4 x 7.2 x 7 cm)

NIMH WEIGHT: 1 lb 7.1 oz (655 g)

ALKALINE WEIGHT: 1 lb 2.3 oz (519 g)

COLOR: Orange or Yellow

YELLOW	ORANGE	
91627	91657	120V AC/12V DC
91622	91652	120V AC
91621	91651	Without Charger
91642	91644	Alkaline Model

	HIGH	LOW
LUMENS:	163	50
CANDELA:	730	230
DISTANCE:	54m	30m
RUN TIME:	3h 45m	12h

Moonlight mode: 20 days of continuous run time
Flash: 8 hours continuous time



Permissible Flashlight
App. No. 20-A140001-0



Class I & II Division 1, Groups C,D,F,G;
Class III; T-Code: T4; Exia;
Non-Incendive: Class I, II, III Division 2;
Groups A,B,C,D,F,G
T-CODE: T4

NFPA

Rack meets requirements
of 1901-14.10.2 (2016)
mounted in any position



	HIGH	LOW
LUMENS:	150	55
CANDELA:	12,900	4,300
DISTANCE:	227m	131m
RUN TIME:	3h 30m	12h

Moonlight mode: 20 days of continuous run time
Flash: 8 hours continuous time



Permissible Flashlight
App. No. 20-A140001-0



Class I & II Division 1, Groups C,D,F,G;
Class III; T-Code: T4; Exia;
Non-Incendive: Class I, II, III Division 2;
Groups A,B,C,D,F,G
T-CODE: T4

NFPA

Rack meets requirements
of 1901-14.10.2 (2016)
mounted in any position



KNUCKLEHEAD® HAZ-LO® SPOT

Class I & II, Div. 1 safety-approved for hazardous locations. Far-reaching beam helps locate hazards or victims from a distance. Articulating head makes it easy to aim light where it's needed. 4 light modes include a flash for signaling and a moonlight mode for 20-day runtime. Hangs or attaches various ways. Powerful, removable magnet. Yellow model features an integrated hook for hands-free use. Orange model has a clip that clamps to objects or turn-out gear. IPX4 rated for water-resistance. 2 meter impact-resistance tested.

KNUCKLEHEAD HAZ-LO SPOT

BATTERY: Dual power source: accepts rechargeable NiMH battery pack or (4) "AA" alkaline batteries

SIZE: 9.2" x 2.85" x 2.75" (23.4 x 7.2 x 7 cm)

NIMH WEIGHT: 1 lb 7.1 oz (655 g)

ALKALINE WEIGHT: 1 lb 2.3 oz (519 g)

COLOR: Orange or Yellow

YELLOW	ORANGE	
91727	91757	120V AC/12V DC
91722	91752	120V AC
91721	91751	Without Charger
91742	91744	Alkaline Model



WEAPON-MOUNTED SERIES //

WEAPON-MOUNTED LIGHTING SPECIALISTS

**WE BUILD A RANGE OF LIGHTS FOR LONG GUN,
FULL-FRAME, COMPACT & SUB-COMPACT PISTOLS.**

Streamlight proudly builds our full line of weapon-mounted lights with features and performance levels to fill the needs of military, law enforcement, concealed carry and sportsmen. From IR to high-lumen to laser, Streamlight TLRs lead the industry.



PROTAC® RAIL MOUNT 2



TL-RACKER®



TLR-9™



TLR-1 HL®

STREAMLIGHT TLRs

THE WIDEST RANGE OF WEAPON-MOUNTED LIGHTS

LIGHT ONLY

COMPACT & FULL FRAME PISTOLS

UNIVERSAL RAIL MOUNT MODELS



TLR-7[®] A
WHITE LIGHT
ILLUMINATOR



TLR-9™
WHITE LIGHT
ILLUMINATOR



TLR-7[®]
WHITE LIGHT
ILLUMINATOR



TLR-1 HL[®]
WHITE LIGHT
ILLUMINATOR



TLR-1[®]//TLR-1[®]s
WHITE LIGHT
ILLUMINATOR



TLR-3[®]
WHITE LIGHT
ILLUMINATOR

SUB-COMPACT & COMPACT PISTOLS

TRIGGER GUARD & RAIL MOUNT MODELS



TLR-7[®] A
WHITE LIGHT ILLUMINATOR



TLR-7[®]
WHITE LIGHT ILLUMINATOR



TLR-3[®]
WHITE LIGHT ILLUMINATOR



TLR-6[®] NON-LASER
WHITE LIGHT ILLUMINATOR

LONG GUN / AR

RAIL MOUNT MODELS



TLR-1 HL[®]
[Long Gun Kit]
WHITE LIGHT ILLUMINATOR



PROTAC[®]
RAIL MOUNT 2
WHITE LIGHT ILLUMINATOR



PROTAC[®]
RAIL MOUNT 1
WHITE LIGHT ILLUMINATOR



PROTAC[®]
RAIL MOUNT HL-X
WHITE LIGHT ILLUMINATOR



TLR-1 HPL[®]
[Long Gun Kit]
WHITE LIGHT ILLUMINATOR



TL-RACKER[®]
WHITE LIGHT ILLUMINATOR



TLR™ RM 1
WHITE LIGHT ILLUMINATOR



TLR™ RM 2
WHITE LIGHT ILLUMINATOR

SPECIALTY / IR

LONG GUN/AR & FULL FRAME PISTOLS



TLR-VIR[®] II
WHITE LIGHT ILLUMINATOR
// IR ILLUMINATOR // IR LASER



TLR-VIR[®]
[Long Gun Kit]
WHITE LIGHT ILLUMINATOR
// IR ILLUMINATOR



TLR-VIR[®] PISTOL
WHITE LIGHT ILLUMINATOR
// IR ILLUMINATOR



TLR-1[®] IR
IR ILLUMINATOR

Streamlight produces a full line of weapon-mounted lights with the features that law enforcement, conceal & carry, and sportsmen need: high-lumen, laser, and IR. Models to fit long guns and full-size and compact pistols.

LIGHT/LASER COMBO



NEW
TLR-8[®] A
WHITE LIGHT ILLUMINATOR
// RED LASER



NEW
TLR-8[®] AG
WHITE LIGHT ILLUMINATOR
// GREEN LASER



NEW
TLR-8[®] G
WHITE LIGHT ILLUMINATOR
// GREEN LASER



TLR-8[®]
WHITE LIGHT ILLUMINATOR
// RED LASER



TLR-2[®] // TLR-2[®]s
WHITE LIGHT ILLUMINATOR
// RED LASER



TLR-2 HL[®]
WHITE LIGHT ILLUMINATOR
// RED LASER



TLR-2[®] G
WHITE LIGHT ILLUMINATOR
// GREEN LASER



TLR-2 HL[®] G
WHITE LIGHT ILLUMINATOR
// GREEN LASER



NEW
TLR-8[®] A
WHITE LIGHT ILLUMINATOR
// RED LASER



NEW
TLR-8[®] AG
WHITE LIGHT ILLUMINATOR
// GREEN LASER



NEW
TLR-8[®] G
WHITE LIGHT ILLUMINATOR
// GREEN LASER



TLR-8[®]
WHITE LIGHT ILLUMINATOR
// RED LASER



TLR-6[®] // RAIL MOUNT // 1911
WHITE LIGHT ILLUMINATOR
// RED LASER



TLR-4[®]
WHITE LIGHT ILLUMINATOR
// RED LASER



TLR-4[®] G
WHITE LIGHT ILLUMINATOR
// GREEN LASER



TLR-2[®] // TLR-2[®]s
WHITE LIGHT ILLUMINATOR
// RED LASER



TLR-2 HL[®]
WHITE LIGHT ILLUMINATOR
// RED LASER



TLR-2 HL[®] G
WHITE LIGHT ILLUMINATOR
// GREEN LASER



TLR-2[®] IRW
WHITE LIGHT ILLUMINATOR
// EYE SAFE IR LASER



TLR-2[®] IR EYE SAFE
IR ILLUMINATOR
// EYE SAFE IR LASER

STREAMLIGHT
TACTICAL WEAPON-MOUNTED SERIES

TLR-8

ULTRA LOW-PROFILE. RAIL MOUNT LIGHTS

TLR-8® RAIL MOUNTED LIGHT

WHITE LIGHT ILLUMINATOR // RED LASER

Ultra-lightweight and low-profile, the TLR-8® weapon-mounted tactical light with integrated red aiming laser features the latest in LED technology. The light provides 1.5 hours of continuous runtime when in dual mode with the high power visible laser. Rail clamp is designed to rapidly attach/detach from the side of compact and full-frame weapons.

TLR-8

BATTERY: (1) 3V "CR123A" lithium

SIZE: 2.15" x 1.18" x 1.50"
(5.46 x 2.98 x 3.81 cm)

WEIGHT: 2.64 oz (75 g)

COLOR: Black

69410 TLR-8 with red laser, rail locating keys and CR123A lithium battery -
Box - Black

LUMENS:	500
CANDELA:	5,000
DISTANCE:	140m
RUN TIME:	1h 30m

Laser mode: 11 hours of run time

With **[(STROBE)]**
Double tap switch to activate.



LUMENS:	500
CANDELA:	5,000
DISTANCE:	140m
RUN TIME:	1h 30m

Laser mode: 18 hours of run time

With **[(STROBE)]**
Double tap switch to activate.



Safe Off feature prevents accidental activation; saves batteries.

TLR-8® G RAIL MOUNTED LIGHT

WHITE LIGHT ILLUMINATOR // GREEN LASER

The ultimate in target engagement enhancement, this rugged lithium battery powered LED weapon light with integrated green laser fits most hand guns and long guns. Features a fast rail clamp for rock solid repeatability on a wide variety of weapons. 500 lumen output delivers a powerful beam with extensive range, good peripheral coverage and selectable strobe mode. The daylight visible green targeting laser uses the latest direct drive diode that burns brightly in extreme temperatures. Runs for 1.5 hours continuously with both light and laser in operation.

TLR-8 G

BATTERY: (1) 3V "CR123A" lithium

SIZE: 2.15" x 1.18" x 1.50"
(5.46 x 2.98 x 3.81 cm)

WEIGHT: 2.64 oz (75 g)

COLOR: Black

69430 TLR-8 G with green laser, rail locating keys and CR123A lithium battery -
Box - Black

TLR-7® RAIL MOUNTED LIGHT
WHITE LIGHT ILLUMINATOR

The TLR-7® weapon-mounted tactical light is ultra-lightweight and low-profile, features the latest in LED technology and provides 1.5 hours of continuous runtime from a single lithium battery. Rail clamp is designed to rapidly attach/detach from the side of compact and full-frame weapons.

TLR-7

BATTERY: (1) 3V "CR123A" lithium

SIZE: 2.20" x 1.20" x 1.47"
(5.58 x 3.04 x 3.73 cm)

WEIGHT: 1.16 oz (33 g)

COLOR: Black



Safe Off feature prevents accidental activation; saves batteries.

LUMENS:	500
CANDELA:	5,000
DISTANCE:	140m
RUN TIME:	1h 30m



With **[(STROBE)]**
Double tap switch to activate.

69420 TLR-7 with rail locating keys and CR123A lithium battery - Box -Black



TLR-9™ RAIL MOUNTED TACTICAL LIGHT W/ REAR SWITCH OPTIONS
WHITE LIGHT ILLUMINATOR

Lightweight & compact, the TLR-9™ full frame Weapon-Mounted Tactical Light features the latest in LED technology for high lumen operation and provides 1.5 hours of continuous runtime from (2) CR123 lithium batteries. 1000 lumen output delivers a powerful beam with extensive range, good peripheral coverage and selectable strobe mode. The TLR-9™ model features rear switches. Rail clamp designed to rapidly attach/detach from side of weapon.

TLR-9

BATTERY: (2) 3V "CR123A" lithium

SIZE: 3.87" x 1.18" x 1.27"
(9.82 x 2.98 x 3.22 cm)

WEIGHT: 4.26 oz (120.9 g)

COLOR: Black

LUMENS:	1,000
CANDELA:	10,000
DISTANCE:	200m
RUN TIME:	1h 30m



HIGH SWITCH
For those who prefer a "Higher Grip Style"



LOW SWITCH
For those who prefer a "Lower Grip Style"

69464 TLR-9 FLEX - Includes High Switch mounted on light plus Low Switch in package. CR123A lithium batteries and key kit - Black - Box



With **[(STROBE)]**
Double tap switch to activate.

WE SWITCHED IT UP

INTRODUCING THE FLEX PLATFORM WITH HIGH AND LOW SWITCHES

NEW



Safe Off feature prevents accidental activation; saves batteries

With [(STROBE)]
Double tap switch to activate.

LUMENS:	500
CANDELA:	5,000
DISTANCE:	140m
RUN TIME:	1h 30m



HIGH SWITCH
For those who prefer a "Higher Grip Style"



LOW SWITCH
For those who prefer a "Lower Grip Style"

TLR-7[®]A RAIL MOUNTED LIGHT

WHITE LIGHT ILLUMINATOR // TWO SWITCH POSITION OPTIONS

The TLR-7[®] A include customized ergonomic switches featuring a low or high position to match your shooting style. It features an ambidextrous on/off rear switch and a rail clamp that is designed to rapidly attach/detach from side of compact and full frame weapons.

TLR-7 A

BATTERY: (1) 3V "CR123A" lithium

SIZE: 2.52" x 1.28" x 1.16"
(6.40 x 3.25 x 2.95 cm)

WEIGHT: 2.47 OZ (70 g)

COLOR: Black

69424 TLR-7 A FLEX – Includes high mounted switch on light plus low switch in package – lithium battery – key kit – allen wrench – Black – Box

NEW



With **[(STROBE)]**
Double tap switch to activate.

Safe Off feature prevents accidental activation; saves batteries.



LOW SWITCH
For those who prefer a "Lower Grip Style"



HIGH SWITCH
For those who prefer a "Higher Grip Style"

LUMENS:	500
CANDELA:	5,000
DISTANCE:	140m
RUN TIME:	1h 30m

Laser mode: 18 hours of run time

TLR-8[®] A RAIL MOUNTED LIGHT

WHITE LIGHT ILLUMINATOR // RED LASER // TWO SWITCH POSITION OPTIONS

The TLR-8[®] A with a red laser include customized ergonomic switches featuring a low or high option to match your shooting style. It features an ambidextrous on/off switch and a rail clamp that is designed to rapidly attach/detach from side of compact and full frame weapons.

TLR-8A

BATTERY: (1) 3V "CR123A" lithium

SIZE: 2.52" x 1.47" x 1.16"
(6.40 x 3.73 x 2.95 cm)

WEIGHT: 2.58 oz (73 g)

COLOR: Black

69414 TLR-8 A FLEX with red laser – high mounted switch on light plus low switch in package – lithium battery – key kit – allen wrench – Black – Box

THE NEW TLR-7 A, TLR-8 A & TLR-8 A G FEATURING TWO SWITCH CONFIGURATIONS

TLR-8[®] A G RAIL MOUNTED LIGHT

WHITE LIGHT ILLUMINATOR // GREEN LASER

Performance night and day. The small and mighty TLR-8[®] A G with a green laser securely fits a broad range of full-size and compact handguns. The green laser is visible even in daylight. Low-profile design prevents snagging and a "safe off" feature prevents accidental activation, saving batteries. It features an ambidextrous on/off switch and a rail clamp that is designed to rapidly attach/detach from side of compact and full frame weapons.

TLR-8 A G

BATTERY: (1) 3V "CR123A" lithium

SIZE: 2.15" x 1.18" x 1.50"
(5.46 x 2.98 x 3.81 cm)

WEIGHT: 2.64 oz (75 g)

COLOR: Black

69434 Green laser, rail locating keys, lithium battery - Box - Black

NEW



With **[(STROBE)]**
Double tap switch to activate.

LUMENS:	500
CANDELA:	5,000
DISTANCE:	140m
RUN TIME:	1h 30m

Laser mode: 11 hours of run time



HIGH SWITCH
For those who prefer a "Higher Grip Style"




LOW SWITCH
For those who prefer a "Lower Grip Style"

* TLR-7, TLR-8, & TLR-8G side switch models cannot be retrofitted to Flex models

STREAMLIGHT TACTICAL WEAPON-MOUNTED SERIES


DIFFERENT KINDS OF BEAMS FOR DIFFERENT KINDS OF TASKS.

WANT TO SEE THESE BEAMS IN ACTION?
Visit Streamlight's www.beamdemo.com
and see the differences for yourself.




TRADITION^{SERIES}

This family of flashlights delivers the optimal balance of bright, far-reaching beam, ample peripheral light, and long run times. When you're out in the field or on any job that requires light for long periods, these are the flashlights you want by your side. Their brightness, power, performance, cost, and extended run times make them perfect for a variety of tasks.



HPL^{SERIES}

These High Performance, High Lumen flashlights throw bright light a long distance. They have a bigger hot spot that casts more light on the target with more peripheral light. They're great for illuminating the entire length of a dark alley, for any task that requires a far-reaching beam.



HL^{SERIES}

These High Lumen flashlights have a wide, side-to-side beam. They illuminate an entire area, including what may be hiding in corners. They perform like floodlights, illuminating a whole room, vehicle, or any area with bright, revealing light.

TLR-2 HL[®]

WHITE LIGHT ILLUMINATOR // RED LASER

This versatile tactical light fits handguns and long-guns, and you can switch from one to the other in seconds. Its wide peripheral beam lets you see what's all around you, including what's lurking in corners. Includes a strobe for signaling/disorienting. Unbreakable, scratch-resistant, gasket-sealed lens. Operates in temperatures from -40°F to +120°F. Impact resistant. Easy, fast battery installation/replacement. The TLR-2 HL is IPX4 rated for water resistant operation and features a 640-660nm red laser.

TLR-2 HL

BATTERY: (2) 3V "CR123A" lithium
SIZE: 3.39" x 1.47" x 1.83" (8.61 x 3.73 x 4.64 cm)
WEIGHT: 4.78 OZ (135.5 g)
COLOR: Black

69261 Includes Rail Locating Keys for use with Glock[®] style, 1913 Picatinny, S&W 99/TSW, and Beretta[®] 90two. Lithium batteries. Black.

UPGRADED

LUMENS:	1,000
CANDELA:	20,000
DISTANCE:	283m
RUN TIME:	1h 30m

Laser mode: 45 hours of run time



HL[®] With [(STROBE)]
Double tap switch to activate.

TLR-2 HL[®] G

WHITE LIGHT ILLUMINATOR // GREEN LASER

We added a direct drive green laser to this powerful high-lumen weapon light. The green is clearly visible to guide your aim even in bright sunlight. You can count on the light and laser even in extreme temperatures from -40°F to +120°F. IPX4 rated for water resistance.

TLR-2 HL G

BATTERY: (2) 3V "CR123A" lithium
SIZE: 3.39" x 1.47" x 1.83" (8.61 x 3.73 x 4.64 cm)
WEIGHT: 4.78 OZ (135.5 g)
COLOR: Black

69265 Includes Rail Locating Keys for use with Glock[®] style, 1913 Picatinny, S&W 99/TSW, and Beretta[®] 90two. Lithium batteries. Black.

UPGRADED

LUMENS:	1,000
CANDELA:	20,000
DISTANCE:	283m
RUN TIME:	1h 30m

Laser mode: 17 hours of run time



HL[®] With [(STROBE)]
Double tap switch to activate.

TLR HL FAMILY OF LIGHTS

HIGH-LUMEN DOMINATION THROUGH MAXIMUM ILLUMINATION.

TLR-1 HL®

WHITE LIGHT ILLUMINATOR

These versatile tactical lights fit handguns and long-guns, and you can switch from one to the other in seconds. Their wide peripheral beam lets you see what's all around you, including what's lurking in corners. Includes a strobe for signaling/disorienting. Unbreakable, scratch-resistant, gasket-sealed lens. Operates in extreme temperatures. Impact resistant. Easy, fast battery installation/replacement. The TLR-1 HL is IPX7 rated waterproof to 1 meter for 30 minutes.

TLR-1 HL

BATTERY: (2) 3V "CR123A" lithium

SIZE: 3.39" x 1.47" x 1.44"
(8.61 x 3.73 x 3.65 cm)

WEIGHT: 4.18 oz (118.6 g)

COLOR: Black, Flat Dark Earth or Flat Dark Earth Brown

69260	Includes Rail Locating Keys for use with Glock® style, 1913 Picatinny, S&W 99/TSW, and Beretta® 90two. Lithium batteries. Black.
69264	Earless. Includes Rail Locating Keys for use with Glock® style, 1913 Picatinny, S&W 99/TSW, and Beretta® 90two. Lithium batteries. Black.
69266	Includes Rail Locating Keys for use with Glock® style, 1913 Picatinny, S&W 99/TSW, and Beretta® 90two. Lithium batteries. Flat Dark Earth.
69267	Includes Rail Locating Keys for use with Glock® style, 1913 Picatinny, S&W 99/TSW, and Beretta® 90two. Lithium batteries. Flat Dark Earth Brown.
69262	Long Gun Kit includes: TLR-1 HL with thumb screw and "safe off" door switch, remote pressure switch and mounting clips, lithium batteries. For pistol mounting the kit also includes standard door switch, rail locating keys. Black.
69288	Long Gun Kit includes: TLR-1 HL with thumb screw and "safe off" door switch, remote pressure switch and mounting clips, lithium batteries. For pistol mounting the kit also includes standard door switch, rail locating keys. Flat Dark Earth.

TLR-1 HL® DUAL REMOTE SWITCH KIT

- Allows for simultaneous or individual activation of the Streamlight TLR-1 HL and accompanying external aiming device
- Pressure switches permit momentary or constant on activation
- Mounts directly to all MIL-STD-1913 (Picatinny) rails

69889	includes TLR-1 HL with Safe Off Tail switch, lithium batteries, Dual Remote Pressure Switch, Mounting Clips, Adhesive pads, and Cable Ties
-------	--

UPGRADED

LUMENS:	1,000
CANDELA:	20,000
DISTANCE:	283m
RUN TIME:	1h 45m

HL® With **[(STROBE)]**
Double tap switch to activate.



TLR-1 HL Long Gun Kit



THE TLR-1 HPL... HIGH-LUMEN + LONG-DISTANCE **SEE EVERYWHERE.**

TLR-1 HPL®
WHITE LIGHT ILLUMINATOR

This high lumen, long-range, rail-mounted tactical light has an intensely bright, far-reaching beam with a large hotspot. It throws a wide beam to illuminate your target downrange, while illuminating everything in your path. Fits long-guns. Attaches/detaches with one hand in seconds. Includes a strobe for signaling/disorienting. Operates in extreme temperatures. IPX7 rated. Impact-resistant. Easy, fast battery replacement.

TLR-1 HPL

BATTERY: (2) 3V "CR123A" lithium
SIZE: 4.83" x 1.44" x 2.2"
(12.27 x 3.66 x 5.59 cm)
WEIGHT: 5.3 oz (150.3 g)
COLOR: Black

TLR-1 HPL W/REMOTE

BATTERY: (2) 3V "CR123A" lithium
SIZE: 5.25" x 1.44" x 2.2"
(13.34 x 3.66 x 5.59 cm)
WEIGHT: 5.6 oz (158.8 g)
COLOR: Black

- | | |
|-------|---|
| 69215 | Standard model. Includes Rail Locating Keys for use with Glock® style, 1913 Picatinny, S&W 99/TSW, and Beretta® 90two. Lithium batteries. Black. |
| 69216 | Remote model. Includes Rail Locating Keys for use with Glock® style, 1913 Picatinny, S&W 99/TSW, and Beretta® 90two. Remote switch and Lithium batteries. Black. |
| 69219 | Long Gun Kit with thumbscrew, "Safe Off" door switch and remote pressure switch. Includes Rail Locating Keys for use with Glock® style, 1913 Picatinny, S&W 99/TSW, and Beretta® 90two. Lithium batteries. Black. |

LUMENS:	1,000
CANDELA:	60,000
DISTANCE:	490m
RUN TIME:	1h 30m

Shown with standard switch backplate.



UPGRADED



Shown with "Safe Off" remote switch backplate.

With **[(STROBE)]**
Double tap switch to activate.



TLR-1® GAME SPOTTER®

GREEN LIGHT ILLUMINATOR

LUMENS:	150
CANDELA:	31,000
DISTANCE:	350m
RUN TIME:	1h 45m



Shown with standard switch backplate.

Shown with remote switch backplate.

A long-gun/long-range light with a green LED that preserves night vision and won't spook game. Mounts directly to long-guns with MIL-STD-1913 rails. Unbreakable, scratch-resistant, O-ring sealed lens. Operates in extreme temperatures. IPX7 rated waterproof to 1 meter for 30 minutes. Impact resistant.

TLR-1 GAME SPOTTER
BATTERY: [2] 3V "CR123A" lithium
SIZE: 4.83" x 1.44" x 2.2"
 (12.27 x 3.66 x 5.59 cm)
WEIGHT: 5.3 OZ (150.3 g)
COLOR: Black

TLR-1 GAME SPOTTER W/REMOTE
BATTERY: [2] 3V "CR123A" lithium
SIZE: 5.25" x 1.44" x 2.2"
 (13.34 x 3.66 x 5.59 cm)
WEIGHT: 5.6 OZ (158.8 g)
COLOR: Black

- | | |
|-------|--|
| 69227 | Standard model. Includes Rail Locating Keys for use with Glock® style, 1913 Picatinny, S&W 99/TSW, and Beretta® 90two. Lithium batteries. Black. |
| 69228 | Remote model. Includes Rail Locating Keys for use with Glock® style, 1913 Picatinny, S&W 99/TSW, and Beretta® 90two. Remote switch and Lithium batteries. Black. |

THE TLR-2G... GREEN LASER FOR ALL CONDITIONS.

TLR-2® G

WHITE LIGHT ILLUMINATOR // GREEN LASER

The highly visible (even in daylight) green laser assists in target acquisition. Mounts directly to handguns with Glock®-style rails and to all MIL-STD-1913 rails. Operates in extreme temperatures. IPX4 rated for water-resistance. Features a strobe that can be disabled.

TLR-2 G

BATTERY: (2) 3V "CR123A" lithium

SIZE: 3.39" x 1.47" x 1.83" (8.61 x 3.73 x 4.64 cm)

WEIGHT: 4.72 oz (133.8 g)

COLOR: Black

69250 Includes Rail Locating Keys for use with Glock® style, 1913 Picatinny, S&W 99/TSW, and Beretta® 90two. Lithium battery. Black.

LUMENS:	300
CANDELA:	12,000
RUN TIME:	2h 30m

Laser mode: 17 hours of run time



With **[(STROBE)]**

Double tap switch to activate.

Mounts directly to handguns with Glock®-style rails and to all MIL-STD-1913 (Picatinny) rails.



TLR TACTICAL LIGHTS

A TRADITION OF DURABILITY, POWER, & LONG RUN TIME.

TLR-1® // TLR-1®s

WHITE LIGHT ILLUMINATOR

Intensely bright, durable tactical light available in standard or strobe. Securely fits a broad range of weapons. Produces a concentrated beam with optimum peripheral illumination. Mounts directly to handguns with Glock®-style rails and to all MIL-STD-1913 rails. Operates in extreme temperatures. IPX7 rated waterproof to 1 meter for 30 minutes. Impact resistant. The TLR-1s includes a strobe.

TLR-1 / TLR-1s

BATTERY: (2) 3V "CR123A" lithium

SIZE: 3.39" x 1.47" x 1.44" (8.61 x 3.73 x 3.65 cm)

WEIGHT: 4.18 oz (118.6 g)

COLOR: Black

- | | |
|-------|---|
| 69110 | Includes Rail Locating Keys for use with Glock® style, 1913 Picatinny, S&W 99/TSW, and Beretta® 90two. Lithium batteries. Black. |
| 69210 | Strobe model includes Rail Locating Keys for use with Glock® style, 1913 Picatinny, S&W 99/TSW, and Beretta® 90two. Lithium batteries. Black. |
| 69211 | Strobe model with Earless Screw Kit, includes Rail Locating Keys for use with Glock® style, 1913 Picatinny, S&W 99/TSW, and Beretta® 90two. Lithium batteries. Black. |

LUMENS:	300
CANDELA:	12,000
DISTANCE:	219m
RUN TIME:	2h 30m



AVAILABLE WITH STROBE
With **[(STROBE)]**
Double tap switch to activate.

LUMENS:	300
CANDELA:	12,000
DISTANCE:	219m
RUN TIME:	2h 30m

Laser mode: 48 hours of run time



AVAILABLE WITH STROBE
With **[(STROBE)]**
Double tap switch to activate.

TLR-2® // TLR-2®s

WHITE LIGHT ILLUMINATOR // RED LASER

The same great features as the TLR-1 lights with a 650-660nm red laser for accurate aiming. Strobe ["s"] model available.

TLR-2 / TLR-2s

BATTERY: (2) 3V "CR123A" lithium

SIZE: 3.39" x 1.47" x 1.83" (8.61 x 3.73 x 4.64 cm)

WEIGHT: 4.72 oz (133.8 g)

COLOR: Black

- | | |
|-------|---|
| 69120 | Red Laser. Includes Rail Locating Keys for use with Glock® style, 1913 Picatinny, S&W 99/TSW, and Beretta® 90two. Lithium batteries. Black. |
| 69230 | Strobe model w/ Red Laser. Includes Rail Locating Keys for use with Glock® style, 1913 Picatinny, S&W 99/TSW, and Beretta® 90two. Lithium batteries. Black. |

STREAMLIGHT TACTICAL WEAPON-MOUNTED SERIES

TLR-2® IRW

WHITE LIGHT ILLUMINATOR // EYE SAFE IR LASER

Features a Class 1 "Eye Safe" Infrared laser along with a blinding bright white light for long-range targeting. User programmable strobe enable/disable. Mounts directly to handguns with Glock® style rails and to all MIL-STD-1913 rails. Operates in extreme temperatures. IPX4 rated for water-resistance.

TLR-2 IRW

BATTERY: (2) 3V "CR123A" lithium

SIZE: 3.39" x 1.47" x 1.83" (8.61 x 3.73 x 4.64 cm)

WEIGHT: 4.72 oz (133.8 g)

COLOR: Black

69165 TLR-2 IRW. Includes Rail Locating Keys for use with Glock® style, 1913 Picatinny, S&W 99/TSW, and Beretta® 90two. Lithium batteries. Black.

LUMENS:	300
CANDELA:	12,000
IR LASER OUTPUT:	Less than .8mW
DISTANCE:	219m
RUN TIME:	2h 30m

Laser mode: 45+ hours of run time



TLR-2® IR EYE SAFE

IR ILLUMINATOR // EYE SAFE IR LASER

Lightweight, compact, lithium battery powered gun-mounted infrared active illuminator with Class 1 "Eye Safe" integrated IR aiming laser. The Illuminator features the latest in shock-proof high power infrared LED technology providing at least 7.5 hrs of continuous run time when in dual mode with the infrared laser. Rail clamp designed to rapidly attach/detach from side of weapon.

TLR-2 IR EYE SAFE

BATTERY: (2) 3V "CR123A" lithium

SIZE: 3.39" x 1.47" x 1.83" (8.61 x 3.73 x 4.64 cm)

WEIGHT: 4.72 oz (133.8 g)

COLOR: Black

69166 TLR-2 IR w/ Eye Safe Laser. Includes Rail Locating Keys for use with Glock® style, 1913 Picatinny, S&W 99/TSW, and Beretta® 90two. Lithium batteries. Black.

IR LED OUTPUT:	120mW
IR LASER OUTPUT:	Less than .8mW
IR RUN TIME:	7h 30m

IR Laser mode: 45+ hours of run time



TLR-1® IR

IR ILLUMINATOR

Lightweight, compact, lithium battery powered gun-mounted active illuminator featuring the latest in high power infrared LED technology. The illuminator is built with a shock-proof LED and provides at least 7.5 hours of continuous run time. Rail clamp designed to rapidly attach/detach from side of weapon.

TLR-1 IR

BATTERY: (2) 3V "CR123A" lithium

SIZE: 3.26" x 1.47" x 1.44" (8.28 x 3.73 x 3.65cm)

WEIGHT: 4.18 oz (118.6 g) with batteries

COLOR: Black

69150 TLR-1 IR. Includes Rail Locating Keys for use with Glock® style, 1913 Picatinny, S&W 99/TSW, and Beretta® 90two. Lithium batteries. Black.

IR OUTPUT:	125mW/sr
IR RUN TIME:	7h 30m



IR requires the use of [NVG] Night Vision Goggles. (Not Included)

STREAMLIGHT OFFERS A COMPLETE RANGE OF IR ILLUMINATORS AND LASERS FOR USE WITH NIGHT VISION GOGGLES.

TLR-VIR® PISTOL

WHITE LIGHT ILLUMINATOR // IR ILLUMINATOR

This combination bright white LED and infrared (IR) illuminator is designed for use with a pistol. It has a lower profile than the original TLR-VIR, and it's waterproof to 66 ft for 2 hours in its standard configuration. The IR illuminator is within the same lens as the white light. You can easily transition from white light to IR with a switch at the bottom of the light. There's no need to remove your eyes from the target or alter your firing grip. It has the standard momentary and constant-on ambidextrous switch as well.

TLR-VIR PISTOL

BATTERY: [2] 3V "CR123A" lithium
SIZE: 3.39" x 1.47" x 1.44" (8.61 x 3.73 x 3.65cm)
WEIGHT: 4.2 OZ (119 g) with batteries
COLOR: Black

69190 Includes rail locating keys for used with Glock® style, 1913 Picatinny, S&W 99/TSW, and Beretta® 90two. Lithium batteries. Black.



Ambidextrous momentary steady-on-off switch

TLR-VIR PISTOL	
LUMENS:	300
CANDELA:	11,000
IR OUTPUT:	1000mW/sr
VISIBLE RUN TIME:	2h 30m
IR RUN TIME:	32h

TLR-VIR®

WHITE LIGHT ILLUMINATOR // IR ILLUMINATOR

Designed to be used with a long gun, includes both a white LED and an Infrared (IR) illuminator. Also features programmable strobe. Momentary/steady On-Off switch with plug port for momentary remote switch. Switch between white and IR as needed. Operates in extreme temperatures. IPX7 rated waterproof to 1 meter for 30 minutes. Designed to fit all long guns with MIL-STD-1913 rails.

TLR-VIR

BATTERY: [2] 3V "CR123A" lithium
SIZE: 3.82" x 1.47" x 2.03" (9.70 x 3.73 x 5.16cm)
WEIGHT: 6.0 OZ (170 g) with batteries, retained lens cap and remote switch
COLOR: Black

69180 Includes opaque lens cover, remote switch, 1913 key. Lithium batteries. Black.

TLR-VIR	
LUMENS:	300
CANDELA:	12,000
IR OUTPUT:	1000mW/sr
VISIBLE RUN TIME:	2h 30m
IR RUN TIME:	20h



With **[(STROBE)]**
 Double tap switch to activate.

opaque lens cover

TLR-VIR® II

WHITE LIGHT ILLUMINATOR // IR ILLUMINATOR // IR LASER

Lightweight, low-profile, lithium battery powered weapon-mounted tactical illuminator with Integrated IR LED/Laser and visible white LED. Class 1 "Eye Safe" IR laser. Has ambidextrous momentary and steady on/off switch and a recessed three position mode selector switch. Windage and elevation adjustment control. Securely fits M17/M18 pistols and all long guns with MIL-STD-1913 rails. IPX7 rated waterproof for 30 minutes.

TLR-VIR II

BATTERY: [1] 3V "CR123A" lithium
SIZE: 3.30" x 1.45" x 1.40" (8.39 x 3.69 x 3.56cm)
WEIGHT: 3.82 OZ (108 g) with batteries
COLOR: Black or Coyote

69192 TLR-VIR II, Black, Mailer Box
 69191 TLR-VIR II, Coyote, Mailer Box

TLR-VIR II	
LUMENS:	300
CANDELA:	5,000
IR OUTPUT:	600mW/sr
IR LASER OUTPUT:	Less than .8mW
VISIBLE RUN TIME:	1h 30m
IR RUN TIME:	12h

Laser mode: 12 hours of run time



With **[(STROBE)]**
 Double tap switch to activate.

STREAMLIGHT TACTICAL WEAPON-MOUNTED SERIES

TLR SERIES ACCESSORIES

At Streamlight, we engineer the highest performing, most rugged, durable and innovative lights on the sportsman, Streamlight builds the accessories you can depend on and the options and configurations that

	TLR-1 HL/TLR-2 HL	TLR-2 G/TLR-2 HL G	TLR-1/TLR-1s	TLR-2/TLR-2s	TLR-1 HPL	TLR-3	TLR-4/TLR-4 G	TLR-6
 Remington 870 Mount	69906	69906	69906	69906	69906	69906	69906	—
 TLR 12 ga. Mag Mount	69901	69901	69901	69901	69901	—	—	—
 AR-15 M16 Mount	69902	69902	69902	69902	69902	69902	69902	—
 Mag Tube/Mossberg Rail						69903	69903	—
 Ambidextrous Vert. Grip w/Rail	69114	69114	69114	69114	69114	69114	69114	—
 TLR-1/TLR-2 Key Kit	69175	69175	69175	69175	69175	—	—	—
 TLR-3/TLR-4 Key Kit	—	—	—	—	—	69176	69176	—
 TLR-7/TLR-8 Key Kit	—	—	—	—	—	—	—	—
 Contour Remote -Glock®	69300	69300	69300	69300	—	—	—	—
 Contour Remote -M&P	69310	69310	69310	69310	—	—	—	—
 TLR-1/TLR-2 Remote Door Switch	69130	69130	69130	69130	69130	—	—	—
 Door Switch w/Safe Off	69161	69161	69161	69161	69161	—	—	—
 Tape Switch	69132	69132	69132	69132	69132	—	—	—
 Coil Pressure Switch	69134	69134	69134	69134	69134	—	—	—
 Straight Press Switch	69135	69135	69135	69135	69135	—	—	—
 TLR Dual Remote Switch	69138	69138	69138	69138	69138	—	—	—
 Red Flip Lens	69115	69115	69115	69115	—	—	—	—
 Blue Flip Lens	69116	69116	69116	69116	—	—	—	—
 Green Flip Lens	69117	69117	69117	69117	—	—	—	—
 IR Flip Lens	69118	69118	69118	69118	—	—	—	—
 Opaque Flip Lens	69124	69124	69124	69124	—	—	—	—
 Remote Retaining Clips								
 CR123 Batteries	2 Pk. // 85175 6 Pk. // 85180 12 Pk. // 85177 400 Pk. // 85179							
 CR1/3N Batteries	2 Pk. // 69271 12 Pk. // 69281 — For use in TLR-6							
 CR2 Lithium Batteries	2 Pk. // 69223 — TLR-3/TLR-4							

market and the widest array of weapon mounted lights. Whether you're LEO, S.W.A.T., Military, home defense or a you need to accommodate all your weapon-mounted needs.

TLR-1 Game Spotter	TLR-VIR	TLR-VIR Pistol	TLR-VIR II	TLR-2 IR EYE SAFE	TLR-2 IRW	TLR-7 TLR-8 TLR-8G	TLR-7 A TLR-8 A TLR-8 A G	TLR-9	TLR RM 1	TLR RM 2
69906	69906	69906	—	69906	69906	69906	69906	69906	—	—
69901	69901	—	—	69901	69901	69901	69901	69901	—	—
69902	69902	69902	—	69902	69902	69902	69902	69902	—	—
—	69903	69903	—	—	69903	—	—	—	—	—
69114	69114	69114	—	69114	69114	—	—	—	—	—
69175	69175	69175	—	69175	69175	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	69177	69177	69177	69177	69177
—	69300	—	—	69300	69300	—	—	—	—	—
—	69310	—	—	69310	69310	—	—	—	—	—
69130	69130	69130	—	69130	69130	—	—	—	—	—
69161	69161	—	—	69161	69161	—	—	—	—	—
69132	69132	69132	—	69132	69132	—	—	—	—	—
69134	69134	69134	—	69134	69134	—	—	—	—	—
69135	69135	69135	—	69135	69135	—	—	—	69135	69135
—	69138	—	—	—	—	—	—	—	69138	69138
—	—	69115	69115	69115	69115	—	—	—	—	—
—	—	69116	69116	69116	69116	—	—	—	—	—
—	—	69117	69117	69117	69117	—	—	—	—	—
—	—	69118	69118	69118	69118	—	—	—	—	—
—	69124	69124	69124	69124	69124	—	—	—	—	—
88178	88178	88178	—	88178	88178	—	—	—	—	88178

TLR-6

ULTRA-COMPACT LIGHTS FOR COMPACT, SUB-COMPACT & CONCEALED CARRY WEAPONS.

TLR-6® FOR SUBCOMPACT HANDGUNS

An industry first, the ultra-compact TLR-6® weapon light with white LED and integrated 640/660 nm red aiming laser features tool-less battery replacement without removal from the weapon or the need to re-sight the laser. The light provides 1 hour of regulated runtime when in dual light/laser mode. Three operating modes — Light only / Light & laser / Laser only. Designed to securely attach to the trigger guard on hand guns. Durable, impact-resistant polymer construction; IPX4 water-resistant. 1 meter impact resistance tested.

TLR-6

BATTERY: [2] 3V CR-1/3 N lithium

SIZE:* 2.30" x .85" x 1.42"
 [5.84 x 2.16 x 3.61 cm]

WEIGHT:* 1.27 oz (36 g)

COLOR: Black or Flat Dark Earth Brown

*Size & Weight vary by model. Glock® 42/43 listed.

LUMENS:	100
CANDELA:	2,000
DISTANCE:	89m
RUN TIME:	1h

Laser mode: 11 hours of run time

69270	TLR-6 (Glock® 42/43) with lithium batteries-Black
69278	TLR-6 (Glock® 42/43) with lithium batteries-Flat Dark Earth Brown
69272	TLR-6 (Glock® 26/27/33) with lithium batteries-Black
69273	TLR-6 (M&P Shield® 40/9) with lithium batteries-Black
69274	TLR-6 (KAHR® ARMS) with lithium batteries-Black
69275	TLR-6 (SIG SAUER® P238/P938) with lithium batteries-Black
69276	TLR-6 (KIMBER® Micro) with lithium batteries-Black
69284	TLR-6 (SIG SAUER® P365) with lithium batteries-Black
69277	TLR-6 Universal Kit-Black

ACCESSORIES

69271	CR 1/3N lithium batteries - 2 pk
69281	CR 1/3N lithium batteries - 12 pk



Model
 #69273

Fits M&P Shield™ 40/9



Model
 #69278

Fits Glock® 42/43
 Flat Dark Earth Brown



Model #69278

Fits Glock® 42, Glock® 43



Model #69272

Fits Glock® 26, Glock® 27, Glock® 33



Model #69273

Fits M&P Shield® 40, M&P Shield® 9



Model #69274

Fits Kahr® Arms CT9, CW9, CM9, CT40, CW40, CM40, TP9, P9, PM9, TP40, P40 and PM40



Model #69275

Fits SIG SAUER® P238, SIG SAUER® P938



Model #69276

Fits KIMBER® Micro



Model #69284

Fits SIG SAUER® P365



Model #69277

All Rights Reserved. M&P Shield®, GLOCK®, SIG SAUER®, KIMBER®, & KAHR® are registered trademarks of Smith & Wesson, Glock, Inc., SIG SAUER, KIMBER, IP LLC & Saeilo Enterprises, Inc. Streamlight has not sought endorsement of this product from Smith & Wesson®, GLOCK®, SIG SAUER®, KIMBER®, KAHR® Arms or Saeilo Enterprises, Inc.

Universal Kit includes LED/laser module and all TLR-6 body housings: Glock 42, Glock 26, M&P Shield, KAHR ARMS, SIG SAUER, KIMBER Micro. (Flat Dark Earth Brown and 1911 model not included.)

TLR-6 RAIL MOUNT

THE IDEAL LIGHT & LASER FOR COMPACT, RAILED HANDGUNS

TLR-6® RAIL MOUNT // FOR COMPACT PISTOLS WITH RAILS

Designed to securely attach to the Rail and the trigger guard of GLOCK® compact railed handguns, Springfield Armory® XD®, XD(M)®, XD® MOD.2® and M&P® standard and compact railed handguns. The compact TLR-6® rail mount weapon light with LED and integrated red aiming laser features tool-less battery replacement without removal from the weapon or the need to re-sight the laser. The light provides 1 hour of regulated runtime when in dual light/laser mode.

TLR-6 RAIL MOUNT

BATTERY: [2] 3V CR-1/3 N lithium

SIZE: 2.20" x 1.20" x 1.47"
 (5.58 x 3.04 x 3.73 cm)

WEIGHT: 1.16 oz (33 g)

COLOR: Black

LUMENS:	100
CANDELA:	2,000
DISTANCE:	89m
RUN TIME:	1h

Laser mode: 11 hours of run time



Model
 #69290

Fits Glock® 17,
 Glock® 19, Glock® 21

69290	TLR-6 Rail (Glock® 17/19/21) with lithium batteries-Black
69291	TLR-6 Rail (SA XD, XD (M), XD MOD 2) with lithium batteries-Black
69293	TLR-6 Rail (S&W M&P®) with lithium batteries-Black

ACCESSORIES

69271	CR 1/3N lithium batteries - 2 pk
69281	CR 1/3N lithium batteries - 12 pk



Model
 #69290

Fits Glock® 17, Glock® 19,
 Glock® 21



Model
 #69291

Fits SA XD®, SA XD (M)®,
 SA XD® MOD. 2®



Model
 #69293

Fits S&W M&P®



TLR-6® NON-LASER

Based on our popular ultra-compact TLR-6® weapon light. This non-laser weapon-mounted light features tool-less battery replacement without removal from the weapon. The light provides 1 hour of regulated runtime. Designed to securely attach to the trigger guard on hand guns. Durable, impact-resistant polymer construction; IPX4 water-resistant. 1 meter impact resistance tested.

TLR-6 NON-LASER

BATTERY: [2] 3V CR-1/3 N lithium

SIZE:* 2.30" x .85" x 1.42"
(5.84 x 2.16 x 3.61 cm)

WEIGHT:* 1.27 oz (36 g)

COLOR: Black

LUMENS:	100
CANDELA:	2,000
DISTANCE:	89m
RUN TIME:	1h

*Size & Weight vary by model. Glock® 42/43 listed.



Model
#69280

Fits Glock® 42& Glock® 43


69280	TLR-6 (Glock® 42/43) with lithium batteries-Black
69282	TLR-6 (Glock® 26/27/33) with lithium batteries-Black
69283	TLR-6 (S&W) with lithium batteries-Black

ACCESSORIES

69271	CR 1/3N lithium batteries - 2 pk
69281	CR 1/3N lithium batteries - 12 pk



STREAMLIGHT
SUB-COMPACT WEAPON-MOUNTED SERIES



TLR-6
FOR NON-RAIL 1911



Model
#69279
Fits 1911

TLR-6® FOR NON-RAIL 1911 HANDGUNS

Add the compact performance of the TLR-6 to many non-rail 1911 handguns including: KIMBER®, Colt®, Ruger® and Smith & Wesson®. The ultra-compact TLR-6® weapon light with LED and integrated red aiming laser features tool-less battery replacement without removal from the weapon or the need to re-sight the laser. The light provides 1 hour of regulated runtime when in dual light/laser mode.

TLR-6 FOR NON-RAIL 1911

BATTERY: [2] 3V CR-1/3 N lithium

SIZE:* 2.34" x .085" x 1.58"
(5.94 x 2.16 x 4.01 cm)

WEIGHT: 1.27 OZ (36 g)

COLOR: Black

LUMENS:	100
CANDELA:	2,000
DISTANCE:	89m
RUN TIME:	1h

Laser mode: 11 hours of run time

69279	TLR-6 (1911) with lithium batteries-Black
69289	TLR-6 (1911) without Laser, with lithium batteries-Black

ACCESSORIES

69271	CR 1/3N lithium batteries - 2 pk
69281	CR 1/3N lithium batteries - 12 pk

DESIGNED TO SECURELY ATTACH TO THE TRIGGER GUARD OF NON-RAIL 1911 HANDGUNS.



Model
#69279
Fits 1911



TLR-6® COMPATIBILITY LIST FOR NON-RAIL 1911 HANDGUNS

KIMBER®

Stainless Ultra Raptor II
Custom CDP
Pro CDP II
Ultra Crimson Carry
Custom TLE II
Pro Carry II
Pro Crimson Carry II

COLT®

1911-A1
1911 Commander
Competition 1911 Government
1991 A1 Government
Gold Cup® National Match
Delta Elite® 10mm
1911 Lightweight Commander

SIG SAUER®

1911 TacPac
1911 C3®
1911 Nitron®
1911 Ultra Compact

PARA® USA

Elite 1911
Expert Commoner
1911 LTC

REMINGTON®

1911 R1S

SMITH & WESSON®

SW 1911 Pro Series
SW 1911 CT
SW 1911 SC
SW 1911

SPRINGFIELD ARMORY®

1911 Range Officer®
1911 Range Officer® Compact

RUGER®

6700
6702

All Rights Reserved. KIMBER®, Colt®, Ruger®, SIG SAUER®, Para® USA, Remington®, Smith & Wesson® and Springfield Armory® are registered trademarks of KIMBER®, Colt®, Ruger®, SIG SAUER®, Para® USA, Remington®, Smith & Wesson® and Springfield Armory®. Streamlight has not sought endorsements of the fore mentioned Corporations.

STREAMLIGHT
SUB-COMPACT WEAPON-MOUNTED SERIES



STREAMLIGHT SUB-COMPACT LIGHTS

**FORGED FOR THE MOST
EXTREME CONDITIONS.**

TLR-3®

WHITE LIGHT ILLUMINATOR

Lightweight and powerful, this super-bright light is designed for sub-compact and compact weapons, yet it fits the broadest array of handguns – up to full size. Operates in extreme temperatures. IPX7 rated waterproof to 1 meter for 30 minutes.

TLR-3

BATTERY: (1) 3V “CR2” lithium

SIZE: 2.71" x 1.18" x 1.51" (6.88 x 3.00 x 3.84 cm)

WEIGHT: 2.32 OZ (65.8 g)

COLOR: Black

69220	Standard model includes rail locating keys for use with Picatinny or Glock® style rails. Lithium battery. Black.
69221	H&K USP Compact Model. Black.
69222	H&K USP Full-Size Model. Black.

LUMENS:	170
CANDELA:	3,300
DISTANCE:	115m
RUN TIME:	1h 30m



TLR-4®

WHITE LIGHT ILLUMINATOR // RED LASER

Designed for sub-compact and compact weapons, this white light illuminator features a red laser to guide your aim. Operates in extreme temperatures. IPX4 rated water-resistant.

TLR-4

BATTERY: (1) 3V “CR2” lithium

SIZE: 2.73" x 1.20" x 1.99" (6.93 x 3.05 x 5.05 cm)

WEIGHT: 2.81 OZ (79.7 g)

COLOR: Black

69240	Standard model includes rail locating keys for use with Picatinny or Glock® style rails. Lithium battery. Black.
69241	H&K USP Compact Model. Black.
69242	H&K USP Full-Size Model. Black.

LUMENS:	170
CANDELA:	3,300
DISTANCE:	115m
RUN TIME:	1h 30m

Laser only mode: 15 hours of run time



TLR-4® G

WHITE LIGHT ILLUMINATOR // GREEN LASER

Extremely compact weapon-mounted light specifically designed for compact/sub-compact weapons, yet still fits a broad range of handguns. Produces a concentrated beam with optimum peripheral illumination. It includes a long-range green laser to help guide your aim. The laser operates through an extended temperature range. IPX4 rated water-resistant.

TLR-4 G

BATTERY: (1) 3V “CR2” lithium

SIZE: 2.73" x 1.20" x 1.99" (6.93 x 3.05 x 5.05 cm)

WEIGHT: 2.81 OZ (79.7 g)

COLOR: Black

69245	Standard model includes rail locating keys for use with Picatinny or Glock® style rails. Lithium battery. Black.
69246	H&K USP Compact Model. Black.
69247	H&K USP Full-Size Model. Black.

LUMENS:	160
CANDELA:	3,200
DISTANCE:	113m
RUN TIME:	1h 45m LED Only
RUN TIME:	1h 15m LED + Laser

Laser only mode: 4 hours of run time



THE TLR™ RM 1 & TLR™ RM 2



SLEEK
NOT A FEEL



The Next Generation of Rail-Mounted Lighting Systems for Long Guns

- The 500 lumen TLR™ RM 1 and 1,000 lumen TLR™ RM 2
- Independently operating ambidextrous tail switch and remote pressure switch provide the security of knowing you'll always have light
- Compact, lightweight and designed to minimize projection off rail
- Complete lighting system with everything needed to mount to your long gun

TLR™ RM 1 RAIL MOUNTED LIGHT

WHITE LIGHT ILLUMINATOR

Lightweight & compact, the TLR™ RM 1 Weapon-Mounted Tactical Light features the latest in shock-proof LED technology for high lumen operation. It provides 1.5 hours of runtime with (1) CR123 lithium battery featuring 500 lumen output. This powerful beam provides extensive range, good peripheral coverage and a selectable strobe mode. Ergonomically friendly multi-function tactical tail switch. Remote switch input option (remote switch included with purchase). Securely attach/detach from any long gun with a MIL Standard 1913 Rail.

TLR RM 1

BATTERY: (1) 3V "CR123A" lithium

SIZE: 3.20" x 1.27" x 1.18"
(8.12 x 3.22 x 2.98 cm)

WEIGHT: 2.74 oz (77.9 g)

COLOR: Black

69440 Includes rail locating keys, tail cap switch, remote pressure switch, mounting clips and lithium battery - Box

69441 Light Only includes Key Kit - one CR123A lithium battery - Black



NEW

[(STROBE)]


Double tap either switch to activate

LUMENS: 500

CANDELA: 5,000

DISTANCE: 140m

RUN TIME: 1h 30m

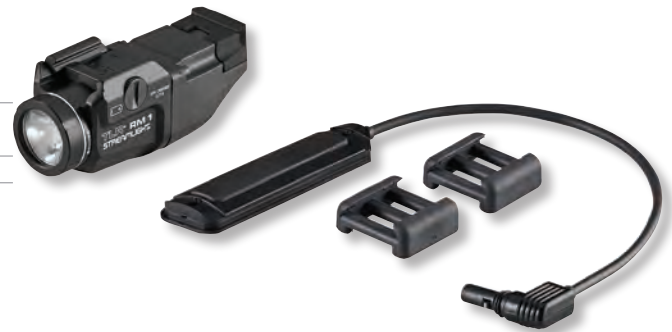

NEW

[(STROBE)]

Double tap either switch to activate

LUMENS: 1,000

CANDELA: 10,000

DISTANCE: 200m

RUN TIME: 1h 30m



TLR™ RM 2 RAIL MOUNTED LIGHT

WHITE LIGHT ILLUMINATOR

Lightweight & compact, the TLR™ RM 2 Weapon-Mounted Tactical Light features the latest in shock-proof LED technology for high lumen operation. It provides 1.5 hours of runtime with (2) CR123 lithium batteries featuring 1,000 lumens output. This powerful beam provides extensive range, good peripheral coverage and a selectable strobe mode. Ergonomically friendly multi-function tactical tail switch. Remote switch input option (remote switch included with purchase). Securely attach/detach from any long gun with a MIL Standard 1913 Rail.

TLR RM 2

BATTERY: (2) 3V "CR123A" lithium

SIZE: 4.55" x 1.27" x 1.18"
(11.55 x 3.22 x 2.98 cm)

WEIGHT: 4.55 oz (129 g)

COLOR: Black

69450 Includes rail locating keys, tail cap switch, remote pressure switch, mounting clips and lithium batteries - Box

69451 Light Only includes Key Kit - two CR123A lithium batteries - Black

STREAMLIGHT
PROTAC WEAPON-MOUNTED SERIES



PROTAC® RAIL MOUNT 1

This 350 lumen light features a dedicated fixed-mount for MIL-STD 1913 rails. It uses either a remote switch with momentary/constant on operation or a standard push-button tail switch, and can run on either a lithium battery or an easy-to-find alkaline battery. TEN-TAP® programming provides operator custom options.

PROTAC RAIL MOUNT 1

BATTERY: (1) 3V "CR123A" lithium or (1) "AA" Alkaline

SIZE: 4.25" x 1.50" x 1.20" (10.8 x 3.81 x 3.04 cm)

WEIGHT: 4.3 OZ (121.9 g) w/CR123 // 4.5 OZ (127.57 g) w/Alkaline

COLOR: Black

88058 (1) lithium & (1) "AA" Battery—Black



With **[(STROBE)]**
Double tap switch to activate.

MULTI-FUEL DESIGN:
Runs on one "AA" alkaline or CR123A lithium battery — both included.

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe (factory default)
- high only
- low/high

CR123	HIGH	LOW	ALKALINE	HIGH	LOW
LUMENS:	350	40	LUMENS:	150	40
CANDELA:	12,000	1,380	CANDELA:	4,950	1,380
DISTANCE:	219m	19m	DISTANCE:	141m	19m
RUN TIME:	1h 45m	14h 30m	RUN TIME:	1h 30m	8h

Strobe runs 2.75 hours

PROTAC® RAIL MOUNT 2

This 625 lumen light features a dedicated fixed-mount for MIL-STD 1913 rails. Lightweight, this bright light can be used in close quarter combat or to identify medium range threats. Rugged, reliable and easy-to-use pressure switch comes with a button for on/off for momentary activation. TEN-TAP® programming provides operator custom options.

PROTAC RAIL MOUNT 2

BATTERY: (2) 3V "CR123A" lithium

SIZE: 5.00" x 1.50" x 1.20" (12.7 x 3.81 x 3.04 cm)

WEIGHT: 5.00 OZ (141.7 g)

COLOR: Black

88059 (2) lithium batteries—Black



With **[(STROBE)]**
Double tap switch to activate.

CR123	HIGH	LOW
LUMENS:	625	60
CANDELA:	22,000	2,000
DISTANCE:	297m	89m
RUN TIME:	2h	21h

Strobe runs 2.75 hours

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe (factory default)
- high only
- low/high

THE PROTAC RAIL MOUNT LIGHTS SHATTER THE DARK WITHOUT BREAKING THE BANK.

PROTAC® RAIL MOUNT HL-X LASER

The ProTac Rail Mount HL-X Laser is a 1,000 lumen long gun light with integrated red aiming laser with windage and elevation adjustments. It has unique functionality with its double switches; push button tailcap or remote pressure switch and multi-fuel options. Available as the USB rechargeable system that includes our Streamlight SL-B26™ protected Li-Ion USB rechargeable battery pack with integrated charge port or the lithium battery version. Either model includes all that you need to mount to your long gun.

PROTAC RAIL MOUNT HL-X LASER


BATTERY: [2] 3V "CR123A" lithium or [1] SL-B26 Li-Ion USB rechargeable battery pack
SIZE: 6.625" x 1.45" (16.83 x 3.75 cm)
WEIGHT W/SL-B26 LI-ION: 10.8 oz (306 g)
COLOR: Black

88089	[2] lithium batteries, remote pressure switch, remote hardware kit—Black
88090	with SL-B26 battery pack & 22" USB Cord, remote pressure switch, remote hardware kit—Black

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe (factory default)
- high only
- low/high

With **[(STROBE)]**
Double tap switch to activate.

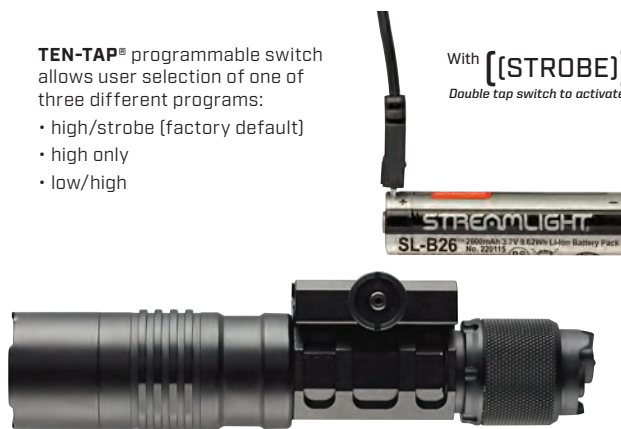

MULTI-FUEL DESIGN:

Runs on CR123 or SL-B26 Li-Ion USB rechargeable battery pack

	WITH CR123	HIGH	LOW		WITH SL-B26	HIGH	LOW
LUMENS:	1,000	60		LUMENS:	1,000	60	
CANDELA:	27,600	1,600		CANDELA:	27,600	1,600	
DISTANCE:	332m	80m		DISTANCE:	332m	80m	
RUN TIME:	1h 15m	20h		RUN TIME:	1h 30m	23h	

Strobe runs 2.5 hours Strobe runs 3.25 hours

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe (factory default)
- high only
- low/high

With **[(STROBE)]**
Double tap switch to activate.



MULTI-FUEL DESIGN:

Runs on CR123 or SL-B26 Li-Ion USB rechargeable battery pack

	WITH CR123	HIGH	LOW		WITH SL-B26	HIGH	LOW
LUMENS:	1,000	60		LUMENS:	1,000	60	
CANDELA:	27,600	1,600		CANDELA:	27,600	1,600	
DISTANCE:	332m	80m		DISTANCE:	332m	80m	
RUN TIME:	1h 15m	20h		RUN TIME:	1h 30m	23h	

Strobe runs 2.5 hours Strobe runs 3.25 hours

PROTAC® RAIL MOUNT HL-X

The ProTac Rail Mount HL-X is a 1,000 lumen light featuring a dedicated fixed-mount for MIL-STD 1913 rails. Lightweight, this bright light can be used in close quarter combat or to identify medium range threats. Rugged, reliable. Its easy-to-use pressure switch comes with a button for on/off and a pressure switch for momentary activation. TEN-TAP® programming provides operator custom options.

PROTAC RAIL MOUNT HL-X

BATTERY: [2] 3V "CR123A" lithium or [1] SL-B26 Li-Ion USB rechargeable battery pack
SIZE: 5.43" x 1.45" x 1.72" (13.8 x 3.68 x 4.37 cm)
WEIGHT W/2X CR123: 6.4 oz (181.4 g)
WEIGHT W/SL-B26 LI-ION: 6.9 oz (195.6 g)
COLOR: Black

88066	[2] lithium batteries—Black
88071	ProTac Rail Mount HL-X USB - includes remote switch, tail switch, remote retaining clips, mounting hardware, SL-B26 battery pack & USB cord - Box - Black

MAKE THE BRIGHTEST TACTICAL DECISION

THE EXPANDED
TL-RACKER® FAMILY



MOSSBERG 500®/530®



REMINGTON 870™



NEW 580® SHOCKWAVE MODEL

TL-RACKER FOREND LIGHT

THE ULTIMATE WEAPON LIGHT

FOR COMBAT SHOTGUNS.

TL-RACKER®

The compact, lightweight all-in-one integrated shotgun forend light. Replace your weapon's forend with the TL-Racker featuring a bright 1,000 lumen LED light in a sleek design that eliminates the need for remote cords, reducing snag hazards. Its ergonomic design provides maximum grip and easy switch access for momentary and constant on. The elongated switch pad accommodates virtually any hand size. Uses (2) CR123A lithium batteries. The customized optic produces a concentrated beam for multiple applications. Ideal for shotgun breaching, close quarter operations or elevating home defense options. Models available for Mossberg 500®/590®/590® Shockwave and Remington 870™. Models available in Orange for Less-Lethal applications.

TL-RACKER

BATTERY: (2) 3V "CR123A" lithium

SIZE: 8.00" x 1.95" x 2.64" (15.24 x 4.95 x 6.70cm)

MOSSBERG WEIGHT: 10.78 OZ (305.6 g) with batteries

REMINGTON WEIGHT: 11.08 OZ (314.1 g) with batteries

COLOR: Black or Orange

69600	(2) lithium batteries, Mossberg 500/590, Black, Box
69601	(2) lithium batteries, Remington 870, Black, Box
69602	(2) lithium batteries, Mossberg Shockwave, Black, Box
69610	(2) lithium batteries, Mossberg, Orange, Box
69611	(2) lithium batteries, Remington 870, Orange, Box



Model #69610
Fits Mossberg

Model #69601
Fits Remington 870



LUMENS:	1,000
CANDELA:	20,000
DISTANCE:	283m
RUN TIME:	1h 30m



Model #69611
Fits Remington 870



Model #69600
Fits Mossberg 500/590




Model #69602
Fits Mossberg 590® Shockwave

TACTICAL SERIES //

TACTICAL LIGHTING SPECIALISTS
FROM EVERY DAY CARRY TO SPECIALIZED HANDS-FREE
LIGHTING. STREAMLIGHT IS TACTICAL.

It takes more than a Matte Black or Flat Dark Earth finish to call yourself tactical at Streamlight. We build a complete series of lights dedicated to providing you with the optimal performance for the task at hand. Choose from a full family of ProTac and PolyTac lights with high-lumen and long runtime options and of course the most versatile military light in the world... the Sidewinder.

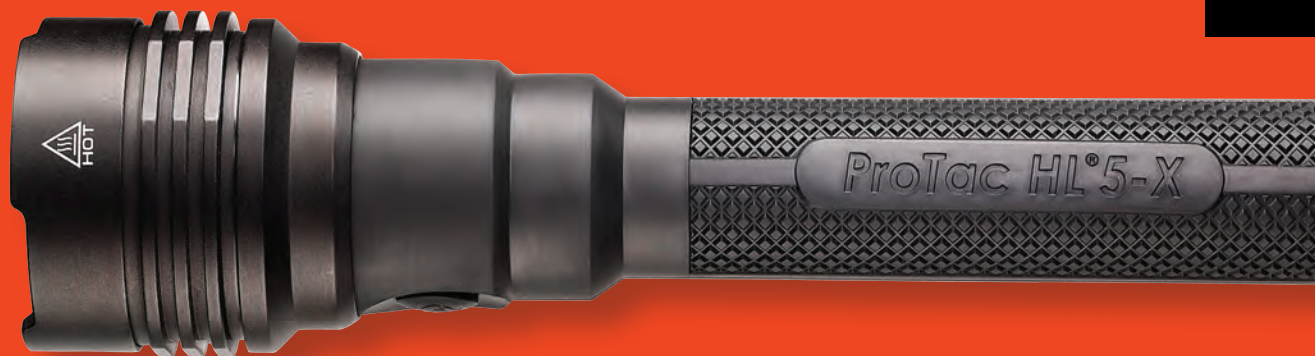

PROTAC HL® 5-X USB



POLYTAC® X USB



PROTAC® 1L-1AA



SIDEWINDER COMPACT® II

SL-B26™ BATTERY PACK. THE BATTERY THAT REINVENTS RECHARGEABILITY.



TURN YOUR HIGH-PERFORMANCE LIGHTS INTO RECHARGEABLE SYSTEMS.

You know how you make the best performing, brightest lights in the business even better? Simple. Give users multiple ways to power and charge them. Introducing our SL-B26™ Protected Lithium Ion USB Rechargeable Battery Pack with integrated charging port. Charges by USB cord, or optional charge cradle. Flexibility for however and wherever you use your light.

SL-B26™ PROTECTED LITHIUM ION USB RECHARGEABLE BATTERY PACK

The battery that transforms multi-fuel, high-performance lighting tools into rechargeable systems. USB rechargeable - Features micro-USB input and charge status indicators; charges in 5 hours. Integrated safety circuit protects battery from overcharge. Charge via USB source or optional charge cradle - or bank charger for departmental use. The charge cradle is ideal for storage as well as to charge your batteries.

BATTERY CAPACITY: 2600mAh SL-B26 protected Li-Ion USB rechargeable battery pack

BATTERY SIZE: 2.75" x .744" (.7 x 1.89cm)

BATTERY WEIGHT: 1.7 OZ (48 g)

CRADLE SIZE: 4.5" (11.4cm)

CRADLE WEIGHT: 2.4 OZ (68 g)


LED display for battery charge status.



Features integrated USB port.

Charge status LEDs:

Red = charging Green = charged

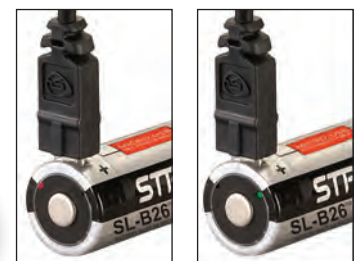

CHARGING

CHARGED

USB Rechargeable 2600mAh SL-B26 Lithium Ion Battery — Charges in 5 hours.

22102	SL-B26 battery pack - 2 pack
22100	Li-Ion Charge Cradle
22010	Li-Ion Battery Pack Kit - USB Cord, (2) SL-B26 Battery Packs
22011	Li-Ion Battery Pack Kit - 120V AC, (2) SL-B26 Battery Packs
22070	40" (101 CM) USB Cord
22081	22" (55.88 CM) USB Cord



Charger temperature safety circuit prevents damage to batteries while charging.

MULTI-FUEL LIGHTING SYSTEMS



Sieve® X USB
Pg. 45



Vantage®
180 X USB
Pg. 53



ProTac®
HL-X USB
Pg. 110



ProTac®
90 X USB
Pg. 120



PolyTac
90® X USB
Pg. 120



PolyTac®
X USB
Pg. 120



ProTac®
2L-X USB
Pg. 110



ProTac
HL® 5-X USB
Pg. 111

ALSO WORKS WITH:

BATTERY SOLD SEPARATELY (NOT AVAILABLE AS SYSTEM)



ProTac® HL USB Headlamp
Pg. 119



ProTac® HL USB
Pg. 112



ProTac® HPL USB
Pg. 112



ProTac HL® 4
Pg. 111

ORGANIZE, STORE AND CHARGE YOUR SL-B26 BATTERIES

EIGHT-UNIT LI-ION BANK CHARGER

Charge up to eight batteries with Streamlight's lithium ion battery bank charger. Each charge bay securely holds the battery in place - ideal for mounting on trucks. Low-profile housing (1"; 2.54 cm) requires minimal mounting area.

Charge time = 5.25 hours

Charge indicators over each battery:

- Red = charging
- Green = charged

Charges with or without optional charge cradle. Use the charge cradle for storage as well as to charge your batteries.

BANK CHARGER

BATTERY CAPACITY: 8

SIZE: 10.45" x 4.74" x 1" (26.54 x 12.06 x 2.54 cm)

WEIGHT WITH BATTERIES: 7.6 oz (216 g)

WEIGHT WITHOUT BATTERIES: 20.88 oz (592 g)

20221	8-Unit Bank Charger - 120V AC
20220	8-Unit Bank Charger - 12V DC
20224	8-Unit Bank Charger w/SL-B26 battery packs - 120V AC
20223	8-Unit Bank Charger w/SL-B26 battery packs - 12V DC
44909	120V AC Cord
44923	12V DC Cord



NFPA Meets requirements of NFPA 1901-14.1.10.2 (2016); mounted in upright position



120V AC Charge Cord



12V DC Charge Cord

**PROTAC® HL-X USB
PROTAC® HL-X**

The ProTac HL-X is a 1,000 lumen tactical light that comes in 2 versions. The ProTac HL-X USB is a rechargeable system. It comes with our Streamlight SL-B26™ protected Li-Ion USB rechargeable battery pack with integrated USB charging port. The ProTac HL-X comes with 2 CR123A batteries. Multi-battery versatility means the user can always use primary disposable cells to power the light if the rechargeable cell is out of power and a charging source is not available. It features a tactical tail cap switch for momentary or constant on operation, three different user selectable programs and a pocket clip for convenience. IP68 rated; dust tight and waterproof to 2 meters.

PROTAC HL-X USB / PROTAC HL-X

BATTERY: (1) SL-B26 Li-Ion USB rechargeable battery pack or (2) 3V “CR123A” lithium

SIZE: 5.43" x 1.44" x 1.0" (13.8 x 3.7 x 2.54 cm)

WEIGHT W/SL-B26: 6.2 OZ (176 g)

WEIGHT W/(2) CR123A: 5.7 OZ (162 g)

COLOR: Black

HL-X USB (SL-B26)	HL-X (CR123A)	
88084	88064	Batteries, holster and wrist lanyard – Clam
88085	88065	Batteries, holster and wrist lanyard – Box
ACCESSORIES		
22102	SL-B26 battery pack - 2 pack	
22100	SL-B26 battery pack Charge Cradle	
22070	USB cord - 40"	
22081	USB cord - 22"	
88043	Nylon Holster	



TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/medium/high



MULTI-FUEL DESIGN:

Runs on (1) SL-B26 battery pack or (2) CR123A

WITH SL-B26	HIGH	MEDIUM	LOW
LUMENS:	1,000	400	65
CANDELA:	27,100	10,000	1,600
DISTANCE:	330m	200m	80m
RUN TIME:	1h 30m	3h 30m	23h

Strobe runs 3.25 hours

WITH CR123A	HIGH	MEDIUM	LOW
LUMENS:	1,000	400	65
CANDELA:	27,100	10,000	1,600
DISTANCE:	330m	200m	80m
RUN TIME:	1h 15m	3h	20h

Strobe runs 2.5 hours

**PROTAC® 2L-X USB
PROTAC® 2L-X**

The ProTac 2L-X is a 500 lumen light that comes in 2 versions. The ProTac 2L-X USB is a rechargeable system. It comes with our Streamlight SL-B26™ protected Li-Ion USB rechargeable battery pack with integrated USB charging port. The ProTac 2L-X comes with 2 CR123A batteries. Multi-battery versatility means the user can always use primary disposable cells to power the light if the rechargeable cell is out of power and a charging source is not available. It features a tactical tail cap switch for momentary or constant on operation, three different user selectable programs and a pocket clip for convenience. IPX7 waterproof to 1 meter for 30 minutes; 1 meter impact resistance tested.

PROTAC 2L-X

BATTERY: (1) SL-B26 Li-Ion USB rechargeable battery pack or (2) 3V “CR123A” lithium

SIZE: 5.14" x 1.06" x .94" (13.0 x 2.7 x 2.4 cm)

WEIGHT W/SL-B26: 4.4 OZ (125 g)

WEIGHT W/(2) CR123A: 3.9 OZ (111 g)

COLOR: Black

2L-X USB (SL-B26)	2L-X (CR123A)	
88082	88062	Batteries, holster and wrist lanyard – Clam
88083	88063	Batteries, holster and wrist lanyard – Box
ACCESSORIES		
22102	SL-B26 battery pack - 2 pack	
22100	SL-B26 battery pack Charge Cradle	
22070	USB cord - 40"	
22081	USB cord - 22"	
88036	Nylon Holster	



With [(STROBE)]
Double tap switch to activate.

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/high

MULTI-FUEL DESIGN:

Runs on (1) SL-B26 battery pack or (2) CR123A

WITH SL-B26	HIGH	LOW
LUMENS:	500	40
CANDELA:	6,800	600
DISTANCE:	165m	49m
RUN TIME:	3h 15m	30h

Strobe runs 4.5 hours

WITH CR123A	HIGH	LOW
LUMENS:	500	40
CANDELA:	6,800	600
DISTANCE:	165m	49m
RUN TIME:	2h 45m	30h

Strobe runs 3.25 hours

PROTAC HL® 4

With 2,200 lumens of blinding light, the ProTac HL®4 is a super bright member of the ProTac® family. It offers the latest in power LED technology and three different user selectable programs. The output from the LED results in a super bright tactical light. The “sure grip rubber sleeve” and included lanyard ensures you’ll never lose your grip. IPX7 waterproof to 1 meter for 30 minutes; 1 meter impact resistance tested.

PROTAC HL 4

BATTERY: (4) 3V “CR123A” lithium or (2) SL-B26 Li-Ion USB rechargeable battery pack

SIZE: 8.63" x 2.35" x 1.24" (21.92 x 5.97 x 3.15 cm)

WEIGHT: 17 oz (482 g)

COLOR: Black

88060 Lithium batteries and wrist lanyard— Black

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/med/high



HL® With **[(STROBE)]**
Double tap switch to activate.

MULTI-FUEL DESIGN:

Runs on (4) CR123 or (2) SL-B26 battery packs

WITH CR123	HIGH	MEDIUM	LOW
LUMENS:	2,200	600	60
CANDELA:	30,000	8,300	800
DISTANCE:	346m	182m	56m
RUN TIME:	1h 30m	4h	40h

Strobe runs 2.5 hours

WITH SL-B26	HIGH	MEDIUM	LOW
LUMENS:	2,200	600	60
CANDELA:	30,000	8,300	800
DISTANCE:	346m	182m	56m
RUN TIME:	1h 45m	4h 15m	43h

Strobe runs 3.5 hours

PROTAC HL® 5-X USB PROTAC HL® 5-X

The ProTac HL 5-X is a 3,500 lumen tactical light that comes in 2 versions. The ProTac HL 5-X USB is a rechargeable system. It comes with our two Streamlight SL-B26™ protected Li-Ion USB rechargeable battery packs. The ProTac HL 5-X comes with four CR123A batteries. Multi-battery versatility means the user can always use primary disposable cells to power the light if the rechargeable cell is out of power and a charging source is not available. The output from the LED results in one of the brightest tactical lights available. The “sure grip rubber sleeve” and included lanyard ensure you’ll never lose your grip.

PROTAC HL 5-X USB / PROTAC HL 5-X

BATTERY: (2) SL-B26 Li-Ion USB rechargeable battery pack or (4) 3V “CR123A” lithium

SIZE: 9.53" x 2.35" x 1.24"
(23.65 x 5.97 x 3.15 cm)

WEIGHT W/SL-B26: 1 lb 3.4 oz (550 g)

WEIGHT W/(4) CR123A: 1 lb 2.4 oz (522 g)

COLOR: Black

HL 5-X USB HL 5-X

[SL-B26] [CR123A]

88080 88074 Batteries, wrist lanyard — Clam

88081 88075 Batteries, wrist lanyard — Box

ACCESSORIES

22082 USB “Y” cord - 22”

22070 USB cord - 40”

22081 USB cord - 22”

22100 SL-B26 Li-Ion Battery Pack Charge Cradle

22101 SL-B26 Battery Pack - 1 pack

22102 SL-B26 Battery Pack - 2 pack



TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/medium/high

HL® With **[(STROBE)]**
Double tap switch to activate.

MULTI-FUEL DESIGN:

Runs on (2) SL-B26 Battery Packs or (4) CR123A batteries

WITH SL-B26	HIGH	MEDIUM	LOW
LUMENS:	3,500	1,000	250
CANDELA:	51,000	14,100	3,620
DISTANCE:	452m	237m	120m
RUN TIME:	1h 15m	3h	11h 30m

Strobe runs 1.25 hours

WITH CR123A	HIGH	MEDIUM	LOW
LUMENS:	2,500	1,000	250
CANDELA:	37,000	14,100	3,620
DISTANCE:	385m	237m	120m
RUN TIME:	1h 30m	2h 30m	10h 30m

Strobe runs 1.5 hours

STREAMLIGHT PROTAC SERIES

PROTAC® HPL USB

The Pro Tac HPL® USB is a versatile tactical light designed for down range applications, that can charge from multiple sources and use three battery types; Streamlight SL-B26 rechargeable lithium ion battery, two CR123A batteries, or lithium ion batteries. This light will charge from a laptop or most USB wall chargers. Multi-battery versatility means you can always use primary disposable cells to power the light when a charging source is not available. It features a tail cap switch for momentary or constant on operation, three different user selectable programs and a pocket clip for convenience. IPX4 rated for water resistance.

PROTAC HPL USB

BATTERY: Lithium-ion, Lithium-ion SL-B26 or [2] 3V "CR123A" lithium
SIZE: 7.08" x 1.72" x 1.07" (18 x 4.38 x 2.7 cm)
WEIGHT: 9.24 OZ (262 g) with Li-On battery
COLOR: Black

	HIGH	MEDIUM	LOW
LUMENS:	1,000	400	65
CANDELA:	35,000	14,100	2,250
DISTANCE:	374m	237m	95m
RUN TIME:	1h 30m	3h	20h

Strobe runs 3 hours



With **[(STROBE)]**
Double tap switch to activate.

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/medium/high

Recharge by plugging into USB port or optional AC wall adapter

88076	USB Cord and holster—Black—Clam
88077	USB Cord and holster—Black—Box
88078	USB 120V/DC and holster—Black—Clam
ACCESSORIES	
22070	40" USB cord
88048	Nylon Holster

PROTAC HL® USB

The ProTac HL USB is incredibly bright and features new multiple power source capability; Streamlight SL-B26 rechargeable lithium ion battery, two CR123A batteries, or lithium ion batteries. It recharges by connecting to a USB port, so it's easy to charge on the go. The anti-rattle battery compartment keeps batteries securely and quietly in place and doesn't need a battery carrier. TEN-TAP® programming lets you choose the selection of operating modes (high/strobe/low, high only or low/medium/high). IPX4 rated for water resistance.

PROTAC HL USB

BATTERY: Lithium-ion, Lithium-ion SL-B26 or [2] 3V "CR123A" lithium
SIZE: 6.50" x 1.23" x 1.07" (16.5 x 3.1 x 2.7 cm)
WEIGHT: 7.2 OZ (204 g) with Li-On battery
COLOR: Black

	HIGH	MEDIUM	LOW
LUMENS:	1,000	380	65
CANDELA:	12,000	4,420	700
DISTANCE:	219m	133m	53m
RUN TIME:	1h 30m	3h 30m	23h

Strobe runs 1.5 hours

Recharge by plugging into USB port or optional AC wall adapter



HL® With **[(STROBE)]**
Double tap switch to activate.

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/medium/high

88052	USB Cord and holster—Black
88054	USB 120V/DC and holster—Black

EPU-5200™ PORTABLE USB CHARGER

We've made it easier than ever to keep your USB flashlights and mobile devices powered up and ready. You can clip the electronic power unit to a vest and take it anywhere. It's lightweight, yet rugged and durable to stand up to almost anything. And it's also a flashlight! IPX4 water-resistant with cover installed.

EPU-5200

BATTERY: Lithium ion cell pack
SIZE: 4.45" x 1.83" x 1.25" (11.3 x 4.7 x 3.2 cm)
WEIGHT: 5.4 OZ (153 g)
COLOR: Black

22600	with USB cord—Black
-------	---------------------

Take the power with you! Charge your light wherever you need to. (Light not included).

Charges most USB products with micro-USB input.

- 4+ full charges for Streamlight Stylus Pro® USB, Clipmate® USB and Double Clutch™ USB
- 2 full charges for Streamlight® ProTac HL® USB
- 1+ full charges for most smartphones and tablets



PROTAC SERIES

THE PERFECT BLEND OF PERFORMANCE + DURABILITY

PROTAC HL®3

Put 1,100 lumens in the palm of your hands with a wide beam pattern that illuminates an entire area. TEN-TAP® programming lets you choose the order of operating modes. IPX7-rated waterproof to 1 meter/30 minutes. 1 meter impact-resistance tested. Includes rubber sleeve.

PROTAC HL 3

BATTERY: (3) 3V "CR123A" lithium

SIZE: 7.1" x 1.73" x 1.0" (18.03 x 4.39 x 2.54 cm)

WEIGHT: 9.3 oz (263 g)

COLOR: Black

	HIGH	LOW
LUMENS:	1,100	35
CANDELA:	36,000	1,200
DISTANCE:	379m	69m
RUN TIME:	2h	43h

Strobe runs 2 hours



TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/high

88047 Lithium batteries and holster— Black

ACCESSORIES

88048 Nylon Holster

PROTAC HL®

One of the brightest tactical personal carry lights of its size, with a far-reaching beam. TEN-TAP® programming lets you choose the order of operating modes. IPX7-rated waterproof to 1 meter/30 minutes. 1 meter impact-resistance tested.

PROTAC HL

BATTERY: (2) 3V "CR123A" lithium

SIZE: 5.4" x 1.375" x 1.0" (13.72 x 3.49 x 2.54 cm)

WEIGHT: 5.6 oz (158 g)

COLOR: Black

	HIGH	LOW
LUMENS:	750	35
CANDELA:	18,300	900
DISTANCE:	270m	60m
RUN TIME:	1h 15m	18h

Strobe runs 2.5 hours



TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/high

88040 Lithium batteries and holster— Black

ACCESSORIES

88043 Nylon Holster

STREAMLIGHT
PROTAC SERIES



PROTAC VERSATILITY
WHEREVER YOU NEED LIGHT
AND HOWEVER YOU POWER IT.

NEW

PROTAC® 90 X USB PROTAC® 90 X

The MULTI-FUEL ProTac 90 X is an EDC light with a twist. It features a right-angle head that gives extra lighting capability for those with multiple lighting needs. Carry in your hand or attach to your MOLLE, belts, harnesses and other gear for hands-free use.

PROTAC 90 X USB / PROTAC 90 X

BATTERY: (1) SL-B26 Li-Ion USB rechargeable battery pack or (2) CR123A

SIZE: 4.39" x 1.14" x .94" (11.1 x 2.9 x 2.4 cm)

PROTAC 90 X USB WEIGHT: 4.9 oz (139 g)

PROTAC 90 X WEIGHT: 4.4 oz (125 g)

COLOR: Black

88094 with CR123A lithium batteries and holster – Black

88095 with USB - SL-B26 battery pack and holster – Black

SEE PAGE 108
FOR OUR SL-B26
BATTERY PACK
CHARGER KIT



X USB MULTI-FUEL FLEXIBILITY

POWER UP WITH A STREAMLIGHT
SL-B26 PROTECTED LI-ION USB
RECHARGEABLE BATTERY PACK
OR (2) CR123A LITHIUM BATTERIES



MULTI-FUEL DESIGN:

Runs on (1) SL-B26 battery pack or (2) CR123A

WITH SL-B26	HIGH	MEDIUM	LOW
LUMENS:	1,000	300	65
CANDELA:	7,350	2,060	450
DISTANCE:	171m	91m	42m
RUN TIME:	1h 45m	4h 45m	24h

Strobe runs 3.5 hours

WITH CR123A	HIGH	MEDIUM	LOW
LUMENS:	1,000	300	65
CANDELA:	7,350	2,060	450
DISTANCE:	171m	91m	42m
RUN TIME:	2h 30m	4h	21h

Strobe runs 2.5 hours

TEN-TAP® programmable switch

allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/medium/high

WITH CR123	HIGH	LOW
LUMENS:	300	40
CANDELA:	5,400	700
DISTANCE:	147m	53m
RUN TIME:	1h 45m	14h

Strobe runs 2.5 hours

WITH "AA" ALK.	HIGH	LOW
LUMENS:	125	40
CANDELA:	2,150	700
DISTANCE:	93m	53m
RUN TIME:	2h 45m	8h

Strobe runs 3.5 hours

WITH "AA" LITH.	HIGH	LOW
LUMENS:	125	40
CANDELA:	2,150	700
DISTANCE:	93m	53m
RUN TIME:	5h 30m	15h

Strobe runs 8 hours



With **[(STROBE)]**

Double tap switch to activate.

MULTI-FUEL DESIGN:

Runs on (1) CR123A, (1) "AA" Alkaline or (1) "AA" Lithium battery

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/high

PROTAC® 90

The ProTac® 90 is a super-bright, ultra-compact, right-angle tactical light featuring the convenience of multi-fuel technology. With its 90° head and a multi-function clip designed to fit MOLLE and other gear, the new light provides multiple wearing options for those requiring hands-free operation.

PROTAC 90

BATTERY: (1) 3V "CR123A" lithium or (1) "AA" alkaline/lithium

SIZE: 3.78" x 1.05 x .86" (9.6 x 2.67 x 2.18 cm)

WEIGHT W/CR123: 2.8 oz (79 g)

WEIGHT W/ALKALINE: 3.1 oz (88 g)

WEIGHT W/LITHIUM: 2.7 oz (77 g)

COLOR: Black

88087 (1) CR123, (1) AA battery and holster—Black—Clam

88088 (1) CR123, (1) AA battery and holster—Black—Box

THE PROTAC SERIES... **A COMPLETE** FOR ALL TYPES OF USES, FROM

PROTAC® 2AA

Small enough to carry in a pocket, lightweight, yet extremely bright. TEN-TAP® programming for user selection of mode programs. IPX7 waterproof to 1 meter for 30 minutes. 2 meter impact resistance tested. Maximum light output throughout battery life.

PROTAC 2AA

BATTERY: (2) "AA" alkaline

SIZE: 6.14" x .9" x .65" (15.60 x 2.29 x 1.65 cm)

WEIGHT: 3.4 OZ (96 g)

COLOR: Black or Coyote

PROTAC® 2AA

88033 (2) alkaline batteries and holster — Black

88072 (2) alkaline batteries and holster — Coyote

ACCESSORIES

88038 Nylon Holster

	HIGH	LOW
LUMENS:	250	18
CANDELA:	4,250	400
DISTANCE:	130m	40m
RUN TIME:	2h	43h

Strobe runs 4 hours



With **[(STROBE)]**
Double tap switch to activate.

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/high

PROTAC® 1AAA

Compact and powerful, this ProTac® series flashlight offers three different user selectable programs and the latest in power LED technology. The combination of small size and output from the LED result in one of the brightest tactical personal carry lights for its size. Packaged with a removable pocket clip and holster. IPX7 waterproof to 1 meter for 30 minutes. 2 meter impact resistance tested.

PROTAC 1AAA

BATTERY: (1) "AAA" alkaline or lithium

SIZE: 3.94" x .71" x .57" (10.0 x 1.80 x 1.44 cm)

WEIGHT: 1.3 OZ (37 g)

COLOR: Black

PROTAC® 1AAA

88049 (1) alkaline battery and holster — Black

ACCESSORIES

72024 Lanyard

MULTI-FUEL DESIGN:

Runs on (1) CR123 or (1) "AA" battery

LITHIUM	HIGH	LOW	ALKALINE	HIGH	LOW
LUMENS:	115	8	LUMENS:	115	8
CANDELA:	890	65	CANDELA:	890	65
DISTANCE:	60m	16m	DISTANCE:	60m	16m
RUN TIME:	2h 15m	23h	RUN TIME:	1h 45m	17h

Strobe runs 3.75 hours

Strobe runs 1.5 hours



With **[(STROBE)]**
Double tap switch to activate.

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/high

FAMILY OF LIGHTS

EVERY DAY CARRY TO MEDICAL USE.

PROTAC® 2AAA

Lightweight personal flashlight with three modes (high, low, and strobe), a removable pocket clip and a 13-hr. run time on low. IPX7 waterproof to 1 meter for 30 minutes. Maximum light output throughout battery life.

PROTAC 2AAA

BATTERY: [2] "AAA" alkaline

SIZE: 5.62" x .72" x .50" (14.27 x 1.83 x 1.27 cm)

WEIGHT: 2.0 OZ (57 g)

COLOR: Black

PROTAC® 2AAA

88039 [2] alkaline batteries – Black

ACCESSORIES

88045 Nylon Holster

	HIGH	LOW
LUMENS:	130	20
CANDELA:	1,230	230
DISTANCE:	70m	30m
RUN TIME:	1h 45m	13h

Strobe runs 3.5 hours



With **[(STROBE)]**
Double tap switch to activate.

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/high

PROTAC® EMS

Provides optimal non-glare light for pupil and wound examination. Long run time. Tempered glass lens for maximum beam clarity. IPX7-rated waterproof to 1 meter for 30 minutes. Maximum light output throughout battery life. Removable pocket clip.

PROTAC EMS

BATTERY: [1] "AA" alkaline or lithium

SIZE: 3.97" x .9" x .65" (10.08 x 2.29 x 1.65 cm)

WEIGHT: 2.3 OZ (65 g)

COLOR: EMS Blue

88034 [1] alkaline battery and holster – EMS Blue

ACCESSORIES

88037 Nylon Holster

	LOW	MED	HIGH
LUMENS:	3.6	10	50
CANDELA:	120	340	1,450
DISTANCE:	20m	36m	76m
RUN TIME:	36h	14h	1h 30m



PROTAC® 1L-1AA

The ProTac® 1L-1AA is a perfect everyday carry light. This multi-fuel, ultra-compact flashlight accepts a single lithium or alkaline battery, providing you with ultimate flexibility in the field. Packaged with a removable pocket clip and holster. IPX7 waterproof to 1 meter for 30 minutes; 2 meter impact resistance tested.

PROTAC 1L-1AA

BATTERY: (1) 3V "CR123A" lithium or 1"AA" alkaline/lithium

SIZE: 4.25" x .95" x .850" (10.8 x 2.41 x 2.16 cm)

WEIGHT W/CR123: 2.5 OZ (71 g)

WEIGHT: 2.8 OZ (79 g) Alkaline // 2.4 OZ (68 g) Lithium

COLOR: Black

PROTAC® 1L-1AA

88061 (1) alkaline & lithium batteries and holster – Black

88073 (1) alkaline & lithium batteries and holster – Coyote

ACCESSORIES

88037 Nylon Holster



With **[(STROBE)]**
Double tap switch to activate.

MULTI-FUEL DESIGN:

Runs on (1) CR123 or (1) "AA" battery

	HIGH	LOW
LUMENS:	350	40
CANDELA:	6,400	720
DISTANCE:	160m	53m
RUN TIME:	1h 30m	14h

Strobe runs 3 hours

	HIGH	LOW
LUMENS:	150	40
CANDELA:	2,750	720
DISTANCE:	105m	53m
RUN TIME:	1h 20m	7h 30m

Strobe runs 3.5 hours

	HIGH	LOW
LUMENS:	150	40
CANDELA:	2,750	720
DISTANCE:	105m	53m
RUN TIME:	4h 15m	14h

Strobe runs 8 hours

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/high

PROTAC® 1L

Ultra-compact and lightweight, yet powerful, bright, with long run times and lots of important features. TEN-TAP® programming for user selection of mode programs (high, low, strobe). IPX7 waterproof to 1 meter for 30 minutes. 2 meter impact resistance tested. Maximum light output throughout battery life.

PROTAC 1L

BATTERY: (1) 3V "CR123A" lithium

SIZE: 3.43" x .9" x .77" (8.71 x 2.29 x 1.96 cm)

WEIGHT: 2.0 OZ (57 g)

COLOR: Black

PROTAC® 1L

88030 (1) lithium batteries and holster – Black

ACCESSORIES

88035 Nylon Holster

	HIGH	LOW
LUMENS:	275	22
CANDELA:	5,100	420
DISTANCE:	143m	41m
RUN TIME:	2h	24h

Strobe runs 3.5 hours



With **[(STROBE)]**
Double tap switch to activate.

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/high

PROTAC® 2L

The ProTac® 2L is compact and lightweight, yet powerful, bright, with long run times and lots of important features. TEN-TAP® programming for user selection of mode programs. IPX7 waterproof to 1 meter for 30 minutes. 2 meter impact resistance tested. Maximum light output throughout battery life.

PROTAC 2L

BATTERY: (2) 3V "CR123A" lithium

SIZE: 4.77" x .9" x .77" (12.12 x 2.29 x 1.96 cm)

WEIGHT: 2.8 OZ (79 g)

COLOR: Black

PROTAC® 2L

88031 (2) lithium batteries and holster – Black

ACCESSORIES

88036 Nylon Holster

	HIGH	LOW
LUMENS:	350	30
CANDELA:	6,300	600
DISTANCE:	159m	49m
RUN TIME:	3h 15m	35h

Strobe runs 6 hours



With **[(STROBE)]**
Double tap switch to activate.

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/high

THE PROTAC SERIES... **SMALLEST, LIGHTEST TACTICAL LIGHTS.**

PROTAC HL® HEADLAMP

The perfect light for when your task requires both hands and a bright light with a wide, long-range beam. 90° tilting head reduces neck fatigue. TEN-TAP® programming lets you choose the order of operating modes. IPX4 rated for water resistance. 1 meter impact-resistance tested. Maximum light output throughout battery life.

PROTAC HL

BATTERY: [2] 3V "CR123A" lithium

SIZE: 3.66" x 1.2" x 2.6" (9.30 x 3.05 x 6.60 cm)

WEIGHT: 6.6 oz (187 g)

COLOR: Black

61304 Lithium batteries—rubber and elastic straps—Black

	HIGH	MEDIUM	LOW
LUMENS:	635	105	20
CANDELA:	8,500	1,450	280
DISTANCE:	184m	76m	33m
RUN TIME:	1h 45m	8h	36h

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/medium/low (factory default)
- high only
- low/medium/high



PROTAC HL® USB HEADLAMP

All the great features of the ProTac HL® headlamp with 1,000 lumens, USB rechargeability and Streamlight SL-B26 USB battery pack. TEN-TAP® programming lets you choose the order of operating modes. Includes diffuser lens for spot/flood functionality as well as interchangeable red and green lenses. IPX4 rated for water resistance. 1 meter impact-resistance tested. Maximum light output throughout battery life. Includes red and green lenses. The Lithium Ion rechargeable battery is the only rechargeable battery that can be recharged while in the headlamp.

PROTAC HL USB

BATTERY: Uses rechargeable lithium ion battery (included); also accepts a Streamlight SL-B26 battery pack

SIZE: 4.03" x 1.20" x 3.12" (10.23 x 3.05 x 7.92 cm)

WEIGHT: 8.1 oz (230 g)

COLOR: Black

61305 ProTac HL USB Headlamp—Black

61306 ProTac HL USB Headlamp 120V AC—Black

	HIGH	MEDIUM	LOW
LUMENS:	1,000	400	65
CANDELA:	13,500	5,400	900
DISTANCE:	232m	147m	60m
RUN TIME:	1h 30m	2h 45m	20h

MULTI-FUEL DESIGN: Uses the same battery (#74175) as the Strion®; also accepts SL-B26 Li-Ion USB rechargeable battery pack



TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/medium/low (factory default)
- high only
- low/medium/high

STREAMLIGHT POLYTAC SERIES



POLYTAC® X USB POLYTAC® X

This 600 lumen tactical light that comes in 2 versions. The PolyTac X USB is a rechargeable system with our SL-B26 USB battery with integrated USB charging port or the PolyTac X comes with 2 CR123A batteries. Multi-battery versatility means the user can always use primary disposable cells to power the light if the rechargeable cell is out of power and can't be charged. Superior grip texture for a comfortable/slip-resistant feel. TEN-TAP® programming lets you choose the order of operating modes. IPX7 rated waterproof to 1 meter/30 minutes. Maximum light output throughout battery life.

POLYTAC X USB / POLYTAC X

BATTERY: (1) SL-B26 Li-Ion USB rechargeable battery pack or (2) 3V "CR123A" lithium

SIZE: 5.46" x 1.25" x 1.00"
(13.97 x 3.43 x 2.54 cm)

WEIGHT W/SL-B26: 4.9 OZ (139 g)

WEIGHT W/[2] CR123A: 4.4 OZ (125 g)

COLOR: Black, Yellow or Coyote

POLYTAC X USB	POLYTAC X	
88610	88600	Batteries – Black – Clam
88611	88601	Batteries – Yellow – Clam
88612	88602	Batteries – Coyote – Clam
88613	88603	Batteries – Black – Box
88614	88604	Batteries – Yellow – Box
88615	88605	Batteries – Coyote – Box

POLYTAC 90® X USB POLYTAC 90® X

Flexible, rugged and super bright, the PolyTac 90 X is built with the rigors of the job in mind. Durable construction plus a switch with built in battery life indicator will let you know when it is time to recharge your battery or replace them giving you the confidence to stay focused on the task at hand. The PolyTac 90 X USB is a rechargeable system that includes a Streamlight SL-B26™ protected Li-Ion USB rechargeable battery pack. The PolyTac 90 X includes two CR123 batteries.

POLYTAC 90 X USB

BATTERY: (1) SL-B26 battery pack

SIZE: 5.22" x 1.25" x 1"
(13.3 x 3.18 x 2.54 cm)

WEIGHT: 4.8 OZ (136 g)

COLOR: Orange, Yellow or Black

POLYTAC 90 X

BATTERY: (2) 3V CR123A lithium

SIZE: 5.22" x 1.25" x 1"
(13.3 x 3.18 x 2.54 cm)

WEIGHT: 4.3 OZ (122 g)

COLOR: Orange, Yellow or Black

YELLOW	ORANGE	BLACK	
88836	88838	88835	90 X USB with SL-B26 battery
—	88837	—	90 X USB w/SL-B26 & Gear Keeper
88831	88834	88830	90 X with lithium batteries
—	88832	—	90 X w/lithium batteries & Gear Keeper

MULTI-FUEL DESIGN:

Runs on (1) SL-B26 battery pack or (2) CR123A

	HIGH	MEDIUM	LOW
LUMENS:	600	260	35
CANDELA:	11,485	4,930	675
DISTANCE:	205m	135m	50m
RUN TIME: [SL-B26]	3h 30m	5h 45m	36h
RUN TIME: [CR123]	2h 45m	5h 30m	34h

SL-B26: Strobe runs 8 hours

CR123A: Strobe runs 5.5 hours

With **[(STROBE)]**

Double tap switch to activate.



TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/medium/high

NFPA Meets requirements of NFPA 1971-8.6 (2013); 500° heat resistance test



X USB MULTI-FUEL FLEXIBILITY

POWER UP WITH A
STREAMLIGHT SL-B26
PROTECTED LI-ION
USB RECHARGEABLE
BATTERY PACK
OR (2) CR123A LITHIUM
BATTERIES

MULTI-FUEL DESIGN:

Runs on (1) SL-B26 battery pack or (2) CR123A


	HIGH	MEDIUM	LOW
LUMENS:	600	260	35
CANDELA:	11,485	4,930	675
DISTANCE:	205m	135m	50m
RUN TIME: [SL-B26]	3h 30m	5h 45m	36h
RUN TIME: [CR123]	2h 45m	5h 30m	34h

SL-B26: Strobe runs 8 hours

CR123A: Strobe runs 5.5 hours

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/medium/high

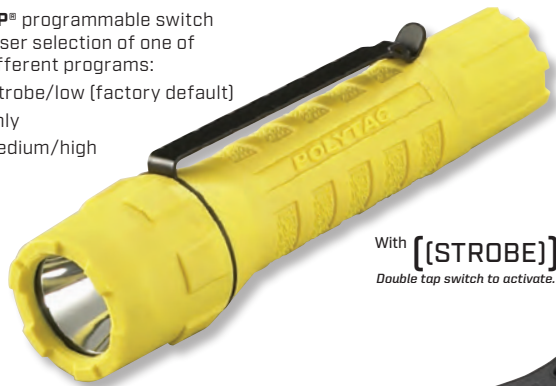

With **[(STROBE)]**
Double tap switch to activate.

	HIGH	MEDIUM	LOW
LUMENS:	600	260	35
CANDELA:	11,500	4,900	675
DISTANCE:	214m	140m	52m
RUN TIME:	2h 45m	5h 30m	34h

Strobe runs 5.5 hours



Helmet Lighting Kit

POLYTAC®

Rugged housing, superior brightness and extended run times make the PolyTac ideal for the broadest range of lighting applications at the best value. Superior grip texture for a comfortable/slip-resistant feel. TEN-TAP® programming lets you choose the order of operating modes. IPX7 rated waterproof to 1 meter/30 minutes. Maximum light output throughout battery life.

POLYTAC

BATTERY: (2) 3V "CR123A" lithium

SIZE: 5.34" x 1.25" x 1"
(13.56 x 3.45 x 2.54 cm)

WEIGHT: 4.2 OZ (121 g)

COLOR: Black, Coyote or Yellow

NFPA

Meets requirements of
NFPA 1971-8.6 (2013)

88850	Lithium batteries – Black
88851	Lithium batteries – Coyote
88853	Lithium batteries – Yellow
88854	Helmet Kit—Yellow PolyTac, rubber strap & helmet mount

POLYTAC® HP

Super-bright with a long-range beam – ideal for lighting the way to the end of a dark alley, down a wooded path, inspecting utility lines from the ground, or conducting search and rescue missions. Virtually indestructible housing. Features a superior grip texture for a comfortable/slip-resistant feel. TEN-TAP® programming lets you choose the order of operating modes. IPX7 rated waterproof to 1 meter/30 minutes. Maximum light output throughout battery life.

POLYTAC HP

BATTERY: (2) 3V "CR123A" lithium

SIZE: 5.90" x 1.68" x 1"
(14.98 x 4.26 x 2.54 cm)

WEIGHT: 5.2 OZ (148 g)

COLOR: Black, Coyote or Yellow

88860	Lithium batteries – Black
88861	Lithium batteries – Coyote
88863	Lithium batteries – Yellow

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/medium/high



With **[(STROBE)]**
Double tap switch to activate.

	HIGH	MEDIUM	LOW
LUMENS:	600	260	35
CANDELA:	22,000	9,500	1,300
DISTANCE:	297m	195m	72m
RUN TIME:	2h 45m	5h 30m	34h

Strobe runs 5.5 hours

POLYTAC ACCESSORIES



	Rubber Helmet Strap	Holster	Red Flip Lens	Green Flip Lens	Blue Flip Lens	Infrared Lens	Helmet Mount	SL-B26 Battery Packs	CR123A Batteries
PolyTac	99075	85909	85115	85117	85116	74039	68085	—	
PolyTac HP	99075	88051	—	—	—	—	68085	—	
PolyTac X	99075	85905	85115	85117	85116	74039	—	See p. 108 for SL-B26 Battery Pack information	2 Pk. 85175 6 Pk. 85180 12 Pk. 85177 400 Pk. 85179
PolyTac X USB	99075	85905	85115	85117	85116	74039	—		

WHEN IT COMES TO HAND-HELD TACTICALS...
THE BRIGHTEST
LIGHT CONTROLS
THE FIGHT.



SUPER TAC® X

Super bright with high, low and strobe modes. Far-reaching beam is ideal for long-range target acquisition. Unbreakable, scratch-resistant lens. IPX4 rated for water resistance. 2 meter impact-resistance tested. Openings O-ring sealed. Regulated intensity throughout battery life.

SUPER TAC X

BATTERY: (2) 3V "CR123A" lithium

SIZE: 6.62" x 2.2" x .9"
(16.81 x 5.59 x 2.29 cm)

WEIGHT: 7.1 oz (201 g)

COLOR: Black

88708	Holster and lithium batteries. Boxed. Black.
88709	Lithium batteries. Clam packaged. Black.
88710	Super Tac Kit: Vert. grip with mount. Boxed. Black.

	HIGH	LOW
LUMENS:	200	10
CANDELA:	40,000	2,000
DISTANCE:	400m	89m
RUN TIME:	2h 30m	50h

Strobe runs 6 hours



Suitable for weapon-mount.

With **[(STROBE)]**
Double tap switch to activate.

Super Tac Kit. Includes vertical grip with rail and low profile mount.

TL-2® X

Pierces the darkness and shines for hours. Produces a smooth beam with optimum peripheral illumination to aid in navigation. High and low modes plus strobe. Includes belt/pocket clip. IPX4 -rated for water-resistance. 3 meter impact-resistance tested. Maximum light output throughout battery life.

TL-2 X

BATTERY: (2) 3V "CR123A" lithium

SIZE: 5.25" x 1.25" x .9"
(13.33 x 3.18 x 2.29 cm)

WEIGHT: 4.7 oz (133 g)

COLOR: Black

88119	Lithium batteries. Black.
-------	---------------------------

	HIGH	LOW
LUMENS:	200	10
CANDELA:	11,000	550
DISTANCE:	210m	47m
RUN TIME:	2h 30m	50h

Strobe runs 6 hours



Suitable for weapon-mount.

With **[(STROBE)]**
Double tap switch to activate.



	Remote Switch Retaining Clips	12 Ga. Mag Tube	Rail Mount	Amb. Vert Grip w/Rail	AR15/M16 Adapter	Low Profile Mount	Remote Switch w/Coil Cord*	Remote Switch w/8" Cord*
Super Tac X	88178	69903	69100	69114	69902	88118	88186	88185
TL-2 X	88178	69903	69100	69114	69902	88118	88186	88185
NightFighter X	—	—	—	—	—	—	*Fits TangoDown Rail Covers (includes two screws, tie wrap, double stick tape and retaining clips)	
Scorpion X	—	—	—	—	—	—		

SCORPION® HL

The only tactical light with a rubberized grip and tail switch is a water-resistant, high lumen flashlight! It has 725 lumens of blinding light, and TEN-TAP® programming.

SCORPION HL

BATTERY: [2] 3V "CR123A" lithium

SIZE: 5.46" x 1.375" x .96"
(13.87 x 3.49 x 2.44 cm)

WEIGHT: 4.8 oz (136 g)

COLOR: Black

85400 Lithium batteries. Black.

	HIGH	LOW
LUMENS:	725	35
CANDELA:	18,500	950
RUN TIME:	1h 15m	18h

Strobe runs 2.5 hours

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/high

HL® With **[(STROBE)]**
Double tap switch to activate.



SCORPION® X

Full-featured tactical light with high, low and strobe modes and a rubberized housing for secure grip. IPX4 rated for water-resistance. Unbreakable, scratch-resistant lens. 3 meter impact-resistance tested. Maximum light output throughout battery life.

SCORPION X

BATTERY: [2] 3V "CR123A" lithium

SIZE: 5.6" x 1.25" x .94"
(14.22 x 3.18 x 2.39 cm)

WEIGHT: 5.3 oz (142 g)

COLOR: Black

85011 Lithium batteries. Black.

	HIGH	LOW
LUMENS:	200	10
CANDELA:	11,000	550
DISTANCE:	210m	47m
RUN TIME:	2h 30m	50h

Strobe runs 6 hours

With **[(STROBE)]**
Double tap switch to activate.



NIGHTFIGHTER® X

The brightest light in the ultra-light Nightfighter series. Unique adjustable ring for one-handed operation. Features high, low and strobe modes. IPX4 rated for water-resistance. 3 meter impact-resistance tested. Maximum light output throughout battery life.

NIGHTFIGHTER X

BATTERY: [2] 3V "CR123A" lithium

SIZE: 5.4" x 1.25" x .88"
(13.72 x 3.18 x 2.24 cm)

WEIGHT: 5.2 oz (147 g)

COLOR: Black

88008 Lithium batteries. Black.

	HIGH	LOW
LUMENS:	200	10
CANDELA:	11,000	550
DISTANCE:	210m	47m
RUN TIME:	2h 30m	50h

Strobe runs 6 hours

With **[(STROBE)]**
Double tap switch to activate.



The fully adjustable ring – unique to the NightFighter X – adjusts to any hand size, providing a sure grip for one-handed operation.



TACTICAL ACCESSORIES

	Nylon Holster	Tactical Holster	Red Flip Lens	Green Flip Lens	Blue Flip Lens	IR Flip Lens	CR123A Batteries
Super Tac X	75910	88051	–	–	–	–	2 Pk. 85175 6 Pk. 85180
TL-2 X	–	–	85115	85117	85116	74039	12 Pk. 85177
NightFighter X	–	–	85115	85117	85116	74039	400 Pk. 85179
Scorpion X	85905	–	85115	85117	85116	74039	



STREAMLIGHT
SIDEWINDER SERIES



SIDEWINDER...
THE MOST VERSATILE
MILITARY LIGHT IN THE WORLD.

SIDEWINDER®

Meets a wide variety of hands-free illumination requirements with various color LEDs at different outputs. 185° tilting head and belt/web clip for multiple positioning/aiming of light. Designed for easy selection of light modes when in the field and when wearing gloves. IPX7 rated waterproof to 1 meter for 30 minutes. 3 meter impact-resistance tested. O-ring and gasket-sealed for waterproof operation. Meets MIL-STD-810F, METHOD 512.4.

SIDEWINDER

BATTERY: [2] "AA" alkaline or [2] "AA" lithium for extended operation in extreme temperatures [-40° F to +150° F]
SIZE: 2.34" x 1.08" x 4.65" (5.94 x 2.74 x 11.81 cm)
LITHIUM WEIGHT: 4.38 OZ (124 g)
ALKALINE WEIGHT: 5.02 OZ (142 g)
COLOR: Coyote

Military Model (White, Red, Blue, IR LEDs)

14000 Alkaline — Clam packaged. Coyote.
 14032 Alkaline — Boxed. Coyote.
 14027 Alkaline — with Helmet Mount. Clam packaged. Coyote.
 14031 Alkaline — with E-mount. Clam packaged. Coyote.

Aviation Model (White, Green, Blue, IR LEDs)

14008 Alkaline — Clam packaged. Coyote.
 14024 Alkaline — with MOLLE retainer. Boxed. Coyote.



WHITE LED	HIGH
LUMENS:	55
CANDELA:	1,175
DISTANCE:	69m
RUN TIME:	5h 30m

SIDEWINDER® RESCUE

PM AIR WARRIOR APPROVED

A lightweight hands-free lighting tool with four different color LEDs, each with varying intensities for a wide variety of tasks. It features a flashing beacon that coupled with the "Slide-in-Place" diffuser, projects omni-directional light to signal for help. The integrated diffuser allows you to go from tight, focused beam to wide, soft beam. Accepts either two "AA" alkaline batteries or two "AA" lithium batteries for maximum versatility in the field. IPX7 waterproof to 1 meter for 30 minutes.

SIDEWINDER RESCUE

BATTERY: [2] "AA" alkaline or [2] "AA" lithium for extended operation in extreme temperatures [-40° F to +150° F]
SIZE: 2.34" x 1.08" x 4.65" (5.94 x 2.74 x 11.81 cm)
LITHIUM WEIGHT: 4.38 OZ (124 g)
ALKALINE WEIGHT: 5.02 OZ (142 g)
COLOR: Coyote

Rescue Model (White, Green, Blue, IR LEDs)

14065 Kit Includes MOLLE retainer, paracord and alkaline batteries. Boxed
 14069 Kit Includes MOLLE retainer, paracord and alkaline batteries. Clam
 14066 Alkaline — Light only. Boxed
 14067 Alkaline — Light only. Clam
 14068 Alkaline — Includes E-Mount. Boxed

SIDEWINDER® LIGHT OUTPUT & BATTERY RUN TIME						
LED	Light Output	Low 5% Output	Medium 1 25% Output	Medium 2 60% Output	High 100% Output	Strobe 100% Output
White	55 Lumens	100 Hrs+	45 Hrs	11 Hrs	5.5 Hrs	10 Hrs
IR	25mW/sr [min] radiant intensity	200 Hrs+	140 Hrs	60 Hrs	24 Hrs	40 Hrs
Red	1 Lumens	200 Hrs+	140 Hrs	60 Hrs	24 Hrs	40 Hrs
Blue	1.8 Lumens	150 Hrs+	100 Hrs	35 Hrs	16 Hrs	30 Hrs
Green	4.5 Lumens	150 Hrs+	100 Hrs	35 Hrs	16 Hrs	30 Hrs

All run time to 10% of initial output level. Illumination output electronically regulated.



Rescue Model

Blue LED
 IR LED
 Green LED

"Slide-in-Place" diffuser can be used with any LED color for omni-directional light

Aluminum plate provides flat surface to adhere Velcro® for attaching to helmet

Cord attachment for para-cord lanyard, which provides extra security from loss of light and allows it to be worn around the neck

Securely attaches to MOLLE or other straps using MOLLE retainer

STREAMLIGHT
SIDEWINDER SERIES



SIDEWINDER COMPACT® II

Extremely versatile lighting tool with white light and a variety of color LEDs for multiple tasks. Fits in the palm of your hand, or clips to MOLLE vest, belt, hat brim or pocket. Helmet mount also available. Entire body rotates 185° for easy aiming of light. Unbreakable, scratch-resistant lens. Special design for easy operation even when wearing heavy gloves. IPX7 rated waterproof to 1 meter for 30 minutes. 3 meter impact-resistance tested. O-ring and gasket-sealed for waterproof operation. Meets MIL-STD-810F, METHOD 512.4.

SIDEWINDER COMPACT II

MULTIPLE POWER SOURCES:

[1] "CR123A" lithium, or [1] "AA" Alkaline, or [1] "AA" lithium

SIZE: 3" x 1.07" x 2.04" (7.62 x 2.72 x 5.21 cm)

WEIGHT: 2.4 oz (69 g) // 3.3 oz (94 g) w/Helmet Mount

COLOR: Coyote

Military Model (White, Red, Blue, IR LEDs)

- 14516 Light only. Boxed.
- 14510 Helmet Mount. Boxed.
- 14512 Helmet Mount and Elastic Headstrap. Clam.
- 14513 E-Mount. Clam packaged.
- 14514 Helmet Mount and Elastic Headstrap. Boxed.
- 14515 Green, Blue, IR LEDs with Night Vision Goggle Mount. Boxed.
- 14518 Helmet and Rail Mount.

Aviation Model (White, Green, Blue, IR LEDs)

- 14531 Rail Mount and Elastic Headstrap.
- 14532 Helmet Mount and Elastic Headstrap, AA Battery. Boxed.
- 14533 Night Vision Goggle Mount. Boxed.



Operates on a AA Alkaline, AA Lithium or CR123A Lithium battery

Military Model

- White LED
- Blue LED
- IR/IFF LED
- Red LED

	HIGH W/CR123 LITHIUM	HIGH W/"AA" LITHIUM	HIGH W/"AA" ALKALINE
--	----------------------	---------------------	----------------------

LUMENS:	55	47	47
CANDELA:	1,175	1,000	1,000
DISTANCE:	69m	63m	63m
RUN TIME:	6h	6h	2h



NVG Mount - Aviation



Aviation Model

- White LED
- Blue LED
- IR/IFF LED
- Green LED

SIDEWINDER® BOOT

The Sidewinder Boot is the new standard light for boot camp, recruit/basic training and wherever extra military instruction occurs. It's a durable hands-free task light that features a high-impact, super-tough, polymer case that offers exceptional durability and weather resistance. It's IPX7 rated and 1M drop tested and includes an integrated red filter that slides into place when needed.

SIDEWINDER BOOT

BATTERY: [2] "AA" Alkaline

SIZE: 1.86" x 0.96" x 4.29" (4.72 x 2.44 x 10.9 cm)

WEIGHT: 3.52 oz (100 g) w/alkaline batteries

COLOR: Coyote

14975 Includes two "AA" batteries - coyote



	HIGH	LOW
LUMENS:	55	7
CANDELA:	1,000	140
DISTANCE:	63m	24m
RUN TIME:	8h	90h

SIDEWINDER ACCESSORIES

	Sidewinder	Sidewinder Compact II	Sidewinder Boot
Helmet Mount 	14055	14055	14055
Rail Mount for Helmet 	14057	14057	14057
NSN-8470-01-633-3996			
Night Vision Goggle Mount -Tactical 	14155	14155	14155
Night Vision Goggle Mount -Aviation 	14135	14135	14135
NSN-5340-01-641-3916			
Safety Wand - Glow in the dark 	14902	14902	—
Elastic Headstrap 	—	14059	14059
E-Mount (ACH, ECH, MICH, LWH compatible) 	14136	14136	14136
NSN-5340-01-641-3930			
E-Mount Access. Kit (Includes E-Mount, MOLLE Retainer and paracord) 	14137	14137	14137
Paracord 	14138	14138	14138
Sidewinder Rescue Access. Kit (Includes MOLLE Retainer and paracord) 	14139	14139	14139
Helmet Mount Kit-Coyote Helmet Mount, Headstrap, and MOLLE plate 	14112	14112	14112
Rail Mount Kit-Coyote Rail Mount, Headstrap and MOLLE plate 	14113	14113	14113
CR123 Batteries 	2 Pk. 85175 6 Pk. 85180 12 Pk. 85177 400 Pk. 85179		—

HEADLAMP SERIES //

HANDS-FREE LIGHTING SPECIALISTS
BECAUSE WORK IS TOUGH ENOUGH WITHOUT
HAVING TO WORRY ABOUT YOUR LIGHTING.

Streamlight headlamps are available in a complete line suited to fill the needs of everyone from heavy industrial use to casual hiker. We build features into our lights that help you light your way exactly how and where you need. Spot beams for distance or flood beams for area lighting, and USB or multi-fuel options allowing you to chose the perfect light for your needs.

ProTac HL® USB



ENDURO® PRO HAZ-LO®



BANDIT®

STREAMLIGHT THE WIDEST RANGE OF HANDS-FREE LIGHTS

Streamlight proudly builds headlamps for all types of users... from those needing safety-rated models for use in hazardous locations or the weekend hiker needing a little extra light to setup the tent at the end of a long day on the trail. Our choices of beam types, light output and runtime ensures you'll be able to find exactly the light you need.

RECHARGEABLE MODELS

LISTED BY TYPE


SPOT / FLOOD MODELS

KEY ATTRIBUTES:
Multi-Function
Task Lighting
General Use
Multi-Purpose




FLOOD MODELS

KEY ATTRIBUTES:
Arm's Length
Task Lighting
Wide, Smooth Light



SPOT MODELS

KEY ATTRIBUTES:
Down Range
Long Distance



ENDURO® PRO USB



USB HAZ-LO® HEADLAMP



TWIN-TASK® USB



DOUBLE CLUTCH™ USB



BANDIT® PRO



BANDIT®



PROTAC HL® USB



QB®

LISTED BY FEATURE

SPECIALTY / COLOR LEDs MODELS

KEY ATTRIBUTES:
Preserve Night Vision
Won't Spook Game



BANDIT® — COYOTE
WHITE/RED LED



BANDIT® — COYOTE
WHITE/GREEN LED



NON-RECHARGEABLE MODELS



ENDURO® PRO HAZ-LO®



ENDURO® PRO



DOUBLE CLUTCH™ ALKALINE



TWIN-TASK® 3AA



TRIDENT®



TRIDENT® HAZ-LO®



SEPTOR®



SEPTOR® HAZ-LO®



PROTAC HL®



ARGO®



ARGO® HAZ-LO®



3AA HAZ-LO®



ENDURO®



ENDURO® PRO — COYOTE
WHITE/GREEN LED



ENDURO® PRO
WHITE/RED LED



GREEN TRIDENT®



BUCKMASTERS® TRIDENT®

**STREAMLIGHT
HEADLAMP SERIES**



BANDIT®

This USB COB headlamp is an ultra lightweight, weather resistant, personal area/work light featuring a large button for easy actuation, and a Lithium Polymer rechargeable battery. A rubber plug keeps dirt and debris out of the micro USB charging port. It includes a handy snap in hat clip adaptor to attach the light on the brim of a baseball cap or to add additional downward adjustability when using the headband. High, Low and Emergency flash modes on Yellow, Black, Red and Blue models.

BANDIT

BATTERY: Lithium Polymer Rechargeable
SIZE: 2.7" x 1.13" x .75" (6.85 x 2.87 x 1.9 cm)
WEIGHT: 1.3 oz (36.8 g)
COLOR: Yellow, Black, Red, Blue or Coyote

61700	w/Headstrap and USB cord— Yellow
61702	w/Headstrap and USB cord— Black
61704	w/Headstrap and USB cord— Blue
61705	w/Headstrap and USB cord— Red
61706	w/Headstrap and USB cord— Coyote / Red LED — Clam
61707	w/Headstrap and USB cord— Coyote / Green LED — Clam

Yellow, Black, Red & Blue Models: White LED



	HIGH	LOW
LUMENS:	180	35
RUN TIME:	2h	9h 30m

Yellow, Black, Red & Blue models:
Emergency flash on high



Includes a handy snap-in hat clip adaptor to attach the light on the brim of a baseball cap or to add additional downward adjustability when using the headband.

	HIGH	LOW
RED LED LUMENS:	45	10
RUN TIME:	2h 30m	10h
GREEN LED LUMENS:	135	25
RUN TIME:	3h	13h 30m

**Coyote Models: White/Red LED
White/Green LED**



	HIGH	LOW
LUMENS:	180	35
RUN TIME:	2h	9h 30m

Includes a rubber head strap that ensures a non-slip grip for hard hats and 3M® Dual Lock® reclosable fasteners.



BANDIT® INDUSTRIAL

All the great features of the Bandit® USB headlamp in an industrial-specific package. Includes elastic strap, rubber hard hat strap and 3M® Dual Lock® Fasteners for strapless mounting to a hard hat.

BANDIT INDUSTRIAL

BATTERY: Lithium Polymer Rechargeable
SIZE: 2.7" x 1.13" x .75" (6.85 x 2.87 x 1.9 cm)
WEIGHT: 1.3 oz (36.8 g)
COLOR: Yellow

61703	with elastic headstrap, rubber hard hat strap, 3M® Dual Lock® reclosable fasteners, and USB cord— Yellow
-------	--

3M® and Dual Lock® are registered Trademarks of the 3M Company.

THE BANDIT FAMILY OF HEADLAMPS ULTRA-COMPACT AND ULTRA-COMPLETE. USED AT THE CAMPGROUND OR THE PROVING GROUND.

BANDIT® PRO BANDIT® PRO INDUSTRIAL

The Bandit® Pro USB headlamp builds on the favorite Bandit® COB headlamp with the added benefits of an extended runtime and a low runtime battery function. It includes a handy snap-in hat clip adaptor to attach the light on the brim of a baseball cap or to add additional downward adjustability when using the headband.

BANDIT PRO / BANDIT PRO INDUSTRIAL

BATTERY: Lithium Polymer Rechargeable

SIZE: 2.7" x 1.13" x .97" (6.85 x 2.87 x 2.46 cm)

WEIGHT: 1.6 oz (45.4 g)

COLOR: Yellow or Black

61711	USB cord, hat clip and elastic headstrap - Box - Yellow
61710	USB cord, hat clip and elastic headstrap - Clam - Yellow
61714	USB cord, hat clip and elastic headstrap - Clam - Black
61715	USB cord, hat clip and elastic headstrap - Box - Black
61716	Industrial Model with elastic headstrap, rubber hard hat strap, 3M® Dual Lock® reclosable fasteners, and USB cord - Box - Yellow



Multi-function push-button switch with charge indicator - shines red when charging, green when charged



	HIGH	LOW
LUMENS:	180	35
RUN TIME:	4h 30m	21h



Includes a handy snap-in hat clip adaptor to attach the light on the brim of a baseball cap or to add additional downward adjustability when using the headband.

Includes a rubber head strap that ensures a non-slip grip for hard hats and 3M® Dual Lock® reclosable fasteners



QB®

This ultralight weight, weather resistant, personal work light featuring a large button for easy actuation, and a Lithium Polymer rechargeable battery. It includes a handy hat clip built right into the saddle, to clip the light on the brim of a baseball cap for added versatility. The adjustable nylon headband has a nonslip inner surface to allow for easy hard hat mounting.

QB

BATTERY: Lithium Polymer Rechargeable

SIZE: 1.57" x 1.44" x 1.4" (4.0 x 3.66 x 3.55 cm)

WEIGHT: 1.5 oz (42.5 g)

COLOR: Yellow or Black

61431	USB cord, hat clip and elastic headstrap - Box - Yellow
61430	USB cord, hat clip and elastic headstrap - Clam - Yellow
61432	USB cord, hat clip and elastic headstrap - Clam - Black
61433	USB cord, hat clip and elastic headstrap - Box - Black



Multi-function push-button switch with charge indicator - shines red when charging, green when charged



	HIGH	LOW
LUMENS:	200	95
CANDELA:	1,800	750
DISTANCE:	85m	55m
RUN TIME:	2h	4h



It includes a handy hat clip built right into the saddle, to clip the light on the brim of a baseball cap for added versatility.



ENDURO PRO HEADLAMPS ARE JUST LIKE YOU. THEY PUT THEIR HEAD DOWN AND GET TO WORK.

ENDURO® PRO USB

Save money over the cost of standard batteries with the Enduro Pro USB rechargeable headlamp. You'll always have the light you need with Spot and Flood beams, each with high, medium and low modes. Spot gives you a bright, focused beam and Flood gives you soft, area illumination that won't tire your eyes on a long job.

ENDURO PRO USB

BATTERY: Lithium polymer cell
SIZE: 1.85" x 2.19" x 1.7" (4.70 x 5.56 x 4.32 cm)
WEIGHT: 3.6 OZ (102 g)
COLOR: Black with Yellow Fascia

61435	USB cord, elastic headstrap—box
61436	USB cord, elastic headstrap, rubber hard hat strap, and 3M® Dual Lock® — box



Includes a rubber head strap that ensures a non-slip grip for hard hats and 3M® Dual Lock® reclosable fasteners.

WHITE SPOT	HIGH	MED	LOW	WHITE FLOOD	HIGH	MED	LOW
LUMENS:	200	90	25	LUMENS:	145	50	15
CANDELA:	2,080	890	250	CANDELA:	220	80	30
DISTANCE:	91m	60m	32m	DISTANCE:	30m	18m	11m
RUN TIME:	6h 15m	19h	48h	RUN TIME:	7h	21h	48h

ENDURO® PRO INDUSTRIAL

All the great features of the Enduro® Pro headlamp in an industrial-specific package. Includes elastic strap, rubber hard hat strap and 3M® Dual Lock® Fasteners for strapless mounting to hard hat. Three modes: spot for distance, flood for area illumination, red light for night vision preservation.

ENDURO PRO INDUSTRIAL

BATTERY: [3] "AAA" alkaline

SIZE: 1.85" x 2.19" x 1.45" (4.70 x 5.68 x 3.68 cm)

WEIGHT: 3.4 OZ (96.38 g)

COLOR: Black with Yellow Fascia

61422 Elastic headstrap, rubber hard hat strap, 3M® Dual Lock® reclosable fasteners, and USB cord— Yellow



SPOT	HIGH	MED	LOW
LUMENS:	200	75	25
CANDELA:	2,250	825	300
DISTANCE:	95m	57m	35m
RUN TIME:	6h	14h	38h

FLOOD	HIGH	MED	LOW
LUMENS:	135	45	15
CANDELA:	210	80	20
DISTANCE:	29m	18m	9m
RUN TIME:	6h	14h	38h



Includes a rubber head strap that ensures a non-slip grip for hard hats and 3M® Dual Lock® reclosable fasteners.

ENDURO® PRO

The Enduro Pro AAA Headlamp features two power LEDs, and two colored LEDs. This headlamp is as versatile as it is durable. The Enduro Pro features eight output modes — three levels of spot or flood and two for the night vision colored LEDs. 45° tilting head design. Snap-on front fascia plate is included and allows you to easily change color. IPX4 water-resistant rated and 2m impact resistance tested.

ENDURO PRO

BATTERY: [3] "AAA" alkaline

SIZE: 1.85" x 2.19" x 1.45" (4.70 x 5.56 x 3.68 cm)

WEIGHT: 3.4 OZ (96.38 g)

COLOR: Yellow or Coyote

61420 [3] alkaline—elastic headstrap—clam— Yellow

61421 [3] alkaline—elastic headstrap—box— Yellow

61425 [3] alkaline—elastic headstrap—box— Coyote/Green LED



Yellow Model:
White / Red LED

Coyote Model:
White / Green LED

Remove yellow or coyote fascia to switch to black

WHITE SPOT	HIGH	MED	LOW
LUMENS:	200	75	25
CANDELA:	2,250	825	300
DISTANCE:	95m	57m	35m
RUN TIME:	6h	14h	38h

WHITE FLOOD	HIGH	MED	LOW
LUMENS:	135	45	15
CANDELA:	210	80	20
DISTANCE:	29m	18m	9m
RUN TIME:	6h	14h	38h

RED LED	HIGH	LOW
LUMENS:	.37	.08

GREEN LED	HIGH	LOW
LUMENS:	1.25	.25

ENDURO® PRO HAZ-LO®

This intrinsically safe, high performance 3 "AAA" battery powered headlamp features two power LEDs. There are a total of three output modes, Spot, Flood and Spot/Flood Combo for maximum brightness. The flood LED is strategically placed high on the light for shadow free lighting when mounted on a hard hat. IP67 dust tight and waterproof to 1m for 30 minutes.

ENDURO PRO HAZ-LO

BATTERY: [3] "AAA" alkaline

SIZE: 2.0" x 2.19" x 1.5" (5.08 x 5.68 x 3.81 cm)

WEIGHT: 3.5 OZ (99.2 g)

COLOR: Yellow

61424 Elastic headstrap, rubber hard hat strap, 3M® Dual Lock® reclosable fasteners— Yellow

SPOT	SPOT	FLOOD	SPOT/FLOOD COMBO
LUMENS:	160	160	235
CANDELA:	1,320	100	—
DISTANCE:	73m	20m	—
RUN TIME:	5h	5h	4h 45m



Includes a rubber hard hat strap and 3M® Dual Lock® fasteners for strapless mounting to hard hats



Class 1, Division 1, Groups A, B, C, D;
Class II, Division 1, Groups E, F, G;
Class III, T-Class: T4 Exia



Permissible Portable Headlamp Assembly
App. No. 20-A070001-0
Tested for use in methane-air mixtures only

STREAMLIGHT
HEADLAMP SERIES



TWIN-TASK HEADLAMPS MULTI-USE AND MULTI-POWER — THEY'RE AS FLEXIBLE AS THEIR ELASTIC STRAPS.

TWIN-TASK® USB HEADLAMP

With two light sources to choose from, the Twin-Task® USB Headlamp is a versatile headlamp for any task. With its 375 lumen main beam for distance spotting and its 250 lumen COB flood LED it has just the right mode for your lighting needs. The ability to recharge the battery in the light or quickly change to a backup battery makes the light easily scalable for extended lighting use. With five lighting levels, the light is up to any task.



Low-profile, ergonomically balanced design; contoured battery pack for wearer comfort.

TWIN-TASK USB

BATTERY: Rechargeable Lithium Ion

SIZE: 1.35" x 2.125" x 2.67" (3.43 x 5.4 x 6.78 cm)

WEIGHT: 6.1 oz (173 g)

COLOR: Black/Red

51063 USB Cord—and elastic strap—Clam—Red

51064 USB Cord—and elastic strap—Box—Red

SPOT	HIGH	MED	LOW
LUMENS:	375	175	50
CANDELA:	3,650	1,850	440
DISTANCE:	121m	86m	42m
RUN TIME:	4h 45m	8h 30m	20h

COB FLOOD	HIGH	LOW
LUMENS:	250	125
CANDELA:	160	80
DISTANCE:	25m	18m
RUN TIME:	5h	9h



Uses three "AA" alkaline batteries (included).

TWIN-TASK® 3AA HEADLAMP

With two light sources to choose from, the Twin-Task® Headlamp is a versatile headlamp for any task. With its 300 lumen main beam for distance spotting and its 250 lumen COB flood LED, it has just the right mode for your lighting needs. With five lighting levels, the light is up to any task.

TWIN-TASK 3AA

BATTERY: (3) "AA" alkaline

SIZE: 1.35" x 2.125" x 2.67" (3.43 x 5.4 x 6.78 cm)

WEIGHT: 7.6 oz (215 g)

COLOR: Black/Red

51061 Alkaline batteries—and elastic strap—Clam—Red

51062 Alkaline batteries—and elastic strap—Box—Red

51065 Alkaline batteries—and rubber strap—Box—Red

SPOT	HIGH	MED	LOW
LUMENS:	300	100	50
CANDELA:	2,900	1,000	500
DISTANCE:	108m	63m	45m
RUN TIME:	4h 15m	20h	38h

COB FLOOD	HIGH	LOW
LUMENS:	250	125
CANDELA:	140	80
DISTANCE:	24m	18m
RUN TIME:	3h 30m	7h 30m



Model with rubber hard hat strap available



PROTAC HL HEADLAMPS DELIVERING HIGH-LUMEN PERFORMANCE AND LONG-RANGE LIGHTING.

PROTAC HL® USB HEADLAMP

All the great features of the ProTac HL® headlamp with 1,000 lumens, USB rechargeability and Streamlight SL-B26 USB battery pack. TEN-TAP® programming lets you choose the order of operating modes. Includes diffuser lens for spot/flood functionality as well as interchangeable red and green lenses. IPX4 rated for water resistance. 1 meter impact-resistance tested. Maximum light output throughout battery life. Includes red and green lenses. The Lithium Ion rechargeable battery is the only rechargeable battery that can be recharged while in the headlamp.

PROTAC HL USB HEADLAMP

BATTERY: Uses rechargeable lithium ion battery (included); also accepts a Streamlight SL-B26 Li-Ion USB battery pack

SIZE: 4.03" x 1.20" x 3.12" (10.23 x 3.05 x 7.92 cm)

WEIGHT: 8.1 oz (230 g)

COLOR: Black

61305	ProTac HL USB Headlamp— Black
61306	ProTac HL USB Headlamp 120V AC— Black
ACCESSORIES	
74175	Lithium ion battery
22101	SL-B26 Battery Pack with USB port - 1 pack
22102	SL-B26 Battery Pack with USB port - 2 pack
22100	SL-B26 Battery Charge Cradle
22070	USB cord - 40"
22081	USB cord - 22"

	HIGH	MEDIUM	LOW
LUMENS:	1,000	400	65
CANDELA:	13,500	5,400	900
DISTANCE:	232m	147m	60m
RUN TIME:	1h 30m	2h 45m	20h

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/medium/low (factory default)
- high only
- low/medium/high



MULTI-FUEL DESIGN:

Uses the same battery (#74175) as the Strion®; also accepts SL-B26 Li-Ion USB rechargeable battery pack

PROTAC HL® HEADLAMP

The perfect light for when your task requires both hands and a bright light with a wide, long-range beam. 90° tilting head reduces neck fatigue. TEN-TAP® programming lets you choose the order of operating modes. IPX4 rated for water resistance. 1 meter impact-resistance tested. Maximum light output throughout battery life.

PROTAC HL HEADLAMP

BATTERY: (2) 3V "CR123A" lithium

SIZE: 3.66" x 1.2" x 2.6" (2.54 x 3.05 x 6.60 cm)

WEIGHT: 6.6 oz (187 g)

COLOR: Black

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/medium/low (factory default)
- high only
- low/medium/high

	HIGH	MEDIUM	LOW
LUMENS:	635	105	20
CANDELA:	8,500	1,450	280
DISTANCE:	184m	76m	33m
RUN TIME:	1h 45m	8h	36h



61304 Lithium batteries and elastic and rubber straps— Black



Includes a rubber head strap that ensures a non-slip grip for hard hats.



THE DOUBLE CLUTCH.
SPOT TO FLOOD
 IN ONE EASY SHIFT.

DOUBLE CLUTCH™ USB

This dual-power, dual-function, dual-output headlamp gives you the flexibility of using either a USB-rechargeable battery or 3 AAA alkaline batteries. It also lets you choose either a spot or a flood beam, both with high and low mode. It's lightweight and long-running with a 60° tilting head. Unbreakable lens. IPX4 rated. Water-resistant. 2 meter impact resistance tested.

DOUBLE CLUTCH USB

BATTERY: Rechargeable Lithium Polymer pack or (3) "AAA" alkaline or lithium batteries

SIZE: 1.75" x 2.50" x 1.66" (4.44 x 6.35 x 4.22 cm)

WEIGHT: 4.0 OZ (113 g)

COLOR: Yellow or Black

YELLOW BLACK

61602	61603	120V AC with elastic and rubber straps
61600	61601	USB Cord (only)
61607	61608	Alkaline Model

ACCESSORIES

22071	22071	120V AC Wall Adapter
22070	22070	USB Cord
61604	61604	Lithium Polymer Battery

LITHIUM POLYMER	HIGH	LOW
LUMENS:	125	30
SPOT DIST:	82m	40m
SPOT CANDELA:	1,700	400
FLOOD DIST:	31m	4m
FLOOD CANDELA:	250	70
RUN TIME:	3h 30m	10h

ALKALINE "AAA"	HIGH	LOW
LUMENS:	125	30
SPOT DIST:	82m	40m
SPOT CANDELA:	1,700	400
FLOOD DIST:	31m	4m
FLOOD CANDELA:	250	70
RUN TIME:	6h	18h



Includes a rubber head strap that ensures a non-slip grip for hard hats.

STREAMLIGHT TECHNOLOGY: DECADES OF ILLUMINATION INNOVATION.

SHIFT BEAMS //

- SHIFTS EASILY TO SPOT OR FLOOD MODES WITH THE TURN OF THE WRIST



- GLOVE-FRIENDLY
- FACECAP ROTATION

SHIFT BATTERIES //

- USB RECHARGEABLE LITHIUM POLYMER OR "AAA" BATTERIES



SHIFT BRIGHTNESS //

- DOUBLE SHIFT FOR HIGH TO LOW IN SPOT OR FLOOD MODES.
- 125 LUMENS ON HIGH. 30 LUMENS ON LOW.



**STREAMLIGHT
HEADLAMP SERIES**



**STREAMLIGHT HEADLAMPS GIVE YOU THE
VERSATILITY AND THE BRIGHTNESS
YOU NEED TO ACCOMPLISH ANY TASK.**

ARGO®

Featuring an intense, long-distance beam for down range illumination with 3 levels of output.

ARGO

BATTERY: [3] "AAA" alkaline

SIZE: 1.75" x 2.70" x 2.40" (4.45 x 6.85 x 6.09 cm)

WEIGHT: 5.4 oz (153 g)

COLOR: Yellow

	HIGH	MED	LOW
LUMENS:	150	100	45
CANDELA:	9,250	6,375	2,750
DISTANCE:	190m	160m	103m
RUN TIME:	3h	4h 30m	30h



Includes a rubber head strap that ensures a non-slip grip for hard hats.



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F, G,
Class III, T5

61301 Alkaline batteries—rubber and elastic straps—Yellow

ARGO® HAZ-LO®

With its intense, long-distance beam that reaches as far as 113 meters, and its Class 1, Division 1 safety rating, the Argo® HAZ-LO® headlamp is ideal any where you need hands-free lighting, even in hazardous environments. Intrinsically safe and offers 2 lighting modes and a 90° tilting head. Unbreakable lens. IPX4 rated for water-resistance. 2 meter impact-resistance tested.

ARGO HAZ-LO

BATTERY: [3] "AAA" alkaline

SIZE: 1.75" x 2.70" x 2.40" (4.45 x 6.85 x 6.09 cm)

WEIGHT: 5.4 oz (153 g)

COLOR: Yellow



Includes a rubber head strap that ensures a non-slip grip for hard hats.

	HIGH	LOW
LUMENS:	90	20
CANDELA:	3,200	700
DISTANCE:	113m	53m
RUN TIME:	8h	50h



Class 1, Division 1, Groups A,B,C,D;
Class II, Division 1, Groups E,F,G;
Class III, T-Class: T4 Exia

61026 Alkaline batteries—rubber and elastic straps—Yellow

SEPTOR®

The Septor headlamp is your ideal choice when you need a hands-free flood light for close-up tasks or tasks at arm's length. It gives you 120 lumens of a soft, wide beam to illuminate your work area.

SEPTOR

BATTERY: (3) "AAA" alkaline

SIZE: 1.75" x 2.70" x 2.40"
(4.45 x 6.85 x 6.09 cm)

WEIGHT: 5.5 oz (156 g)

COLOR: Yellow



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F, G,
Class III, T5

61052 Alkaline batteries—rubber and elastic straps—Yellow

	HIGH	MED	LOW
LUMENS:	120	45	13
CANDELA:	900	375	100
DISTANCE:	60m	35m	20m
RUN TIME:	3h 30m	10h	55h



Includes a rubber head strap that ensures a non-slip grip for hard hats.

SEPTOR® HAZ-LO®

The perfect headlamp for close-up tasks or tasks at arm's length is now safe to use in hazardous locations and is intrinsically safe. 90° tilting head. High and low lighting modes. Unbreakable lens. IPX4 rated for water-resistance. 2 meter impact-resistance tested.

SEPTOR HAZ-LO

BATTERY: (3) "AAA" alkaline

SIZE: 1.75" x 2.70" x 2.40"
(4.45 x 6.85 x 6.09 cm)

WEIGHT: 5.5 oz (156 g)

COLOR: Yellow



Class I, Div 1, Groups A,B,C,D;
Class II, Div 1, Groups E,F,G;
Class III; T-Class: T4 Exia

61024 Alkaline batteries—rubber and elastic straps—Yellow

	HIGH	LOW
LUMENS:	85	20
CANDELA:	620	150
DISTANCE:	50m	24m
RUN TIME:	8h	50h



Includes a rubber head strap that ensures a non-slip grip for hard hats.

3AA HAZ-LO® HEADLAMP

This compact, long-running, high-performance headlamp meets the stringent requirements of Div. 1 hazardous locations. Exceptional light output. Long run time. Unbreakable, O-ring sealed lens. Easy operation even when wearing heavy gloves. Impact-resistant housing – 1 meter drop-test verified. Intrinsically safe.

3AA HAZ-LO

BATTERY: (3) "AA" alkaline

SIZE: 1.88" x 2.5" x 3.08"
(4.76 x 6.35 x 7.82 cm)

WEIGHT: 7.1 oz (202 g)

COLOR: Yellow



Permissible Portable Headlamp Assembly
App. No. 20-A070001-0
Tested for use in methane-air mixtures only



Class I, Div. 1, Groups A,B,C,D;
Class II, Div. 1, Groups E,F,G,
Class III, T4

61200 Alkaline batteries—rubber and elastic straps—Yellow

LUMENS:	120
CANDELA:	6,800
DISTANCE:	165m
RUN TIME:	11h



Includes a rubber head strap that ensures a non-slip grip for hard hats.

STREAMLIGHT HEADLAMP SERIES

TRIDENT®

The Trident multi-purpose headlamp offers the versatility of switching between either a bright light to illuminate objects at a distance (126 meters) or a soft flood light for tasks at arm's length.

TRIDENT

BATTERY: (3) "AAA" alkaline

SIZE: 1.75" x 2.70" x 2.40" (4.45 x 6.85 x 6.09 cm)

WEIGHT: 5.50 oz (156 g)

COLOR: Yellow or Green or RealTree Edge™

THREE TRIDENT MODELS:

Yellow Model: Contains Power LED and three ultra-bright white LEDs

Green Model: Contains Power LED, one safety green LED, two white 5mm LEDs

Buckmasters Camo Model: RealTree Edge™ camo; contains super-bright Power LED and three safety-green 5mm LEDs

TRIDENT HEADLAMP

61050 with White LEDs with alkaline batteries—Yellow

61051 2 White and 1 Green LED with alkaline batteries—Green

61070 3 Green LEDs with alkaline batteries—Camo

Safety-Rated Models



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F, G,
Class III, T5



Yellow

Model	POWER 3 LEDs	1 LED
LUMENS:	80	35
CANDELA:	4,000	385
DISTANCE:	126m	39m
RUN TIME:	5h	10h

Green

Model	POWER 2 LEDs	1 LED
LUMENS:	80	25
CANDELA:	4,000	275
DISTANCE:	126m	33m
RUN TIME:	5h	19h 30m

Camo

Model	POWER 3 LEDs	1 LED
LUMENS:	80	20
CANDELA:	4,000	175
DISTANCE:	126m	26m
RUN TIME:	5h	20h



Includes a rubber head strap that ensures a non-slip grip for hard hats.

TRIDENT® HAZ-LO®

Now you can safely use this multi-purpose headlamp in hazardous environments. The Class 1, Division 1 safety-rated Trident® HAZ-LO® headlamp is intrinsically safe and gives you the versatility to switch between a bright power LED to illuminate objects at a distance (102 meters!) or a soft flood light for close-up tasks. 90° tilting head. Unbreakable lens. IPX4 rated for water-resistance. 2 meter impact-resistance tested.

TRIDENT HAZ-LO

BATTERY: (3) "AAA" alkaline

SIZE: 1.75" x 2.70" x 2.40" (4.45 x 6.85 x 6.09 cm)

WEIGHT: 5.50 oz (156 g)

COLOR: Yellow

61025 with alkaline batteries—rubber and elastic straps—Yellow



Class I, Div 1, Groups A,B,C,D;
Class II, Div 1, Groups E,F,G;
Class III; T-Class: T4 Exia.



Includes a rubber head strap that ensures a non-slip grip for hard hats.



	HIGH	LOW
LUMENS:	85	30
CANDELA:	2,600	300
DISTANCE:	102m	35m
RUN TIME:	8h	24h

ENDURO®

The Enduro® is ultralight and super comfortable. It features an integrated rubber/elastic combination head strap and a clip that attaches to the brim of your hat, coat lapel or car visor. Unbreakable lens. O-ring sealed, waterproof to 1 meter for 1 hour. Impact-resistant housing – drop-test verified. Maximum light output throughout battery life.

ENDURO

BATTERY: (2) “AAA” alkaline

SIZE: 1.3" x 2.25" x 1.6"
(3.25 x 5.7 x 4 cm)

WEIGHT: 2.75 oz (78.5 g)

COLOR: Black or RealTree Edge™

61400	with alkaline batteries—elastic strap and visor clip—Black
61405	with alkaline batteries—elastic strap and visor clip—Camo



BLACK & CAMO MODEL

WHITE LED	HIGH	LOW
LUMENS:	50	10
CANDELA:	1,100	285
DISTANCE:	86m	33m
RUN TIME:	5h 30m	25h

Includes integrated rubber/elastic combination head strap and a clip that attaches to the brim of your hat, coat lapel or car visor.



INTRODUCING A NEW

RECHARGEABLE HEADLAMP WITH CLASS I, DIV 1 SAFETY RATINGS.

NEW



	SPOT	FLOOD	COMBINED
LUMENS:	190	120	250
CANDELA:	2,000	90	—
DISTANCE:	89m	19m	—m
RUN TIME:	7h 30m	13h	7h



Class 1, Division 1, Groups A,B,C,D;
Class II, Division 1, Groups E,F,G;
Class III, T-Class: T4 Exia

Includes a rubber hard hat strap and 3M® Dual Lock® fasteners for strapless mounting to hard hats



USB HAZ-LO® HEADLAMP

The ideal headlamp for those who work in potentially hazardous work environments requiring flexible lighting options, with the added feature of USB rechargeability. You're able to charge your light anywhere and save money over the cost of standard batteries. The dual beam, multi-function USB HAZ-LO® has three output modes: Spot, Flood and Spot/Flood to cover a variety of tasks. The USB HAZ-LO® comes with both an elastic head strap and a rubber hard hat strap, as well as 3M® Dual Lock® fasteners for strapless mounting. IP67 dust tight and waterproof to 1m for 30 minutes.

USB HAZ-LO

BATTERY: SL-B26 Li-Ion USB rechargeable battery pack

SIZE: 1.72" x 3.25" x 1.75" (4.36 x 8.25 x 4.45 cm)

WEIGHT: 2.75 oz (78.5 g)

COLOR: Yellow

61460 Elastic headstrap, rubber hard hat strap, and 3M® Dual Lock® - Box - Yellow

61463 120V AC Charger, elastic headstrap, rubber hard hat strap, and 3M® Dual Lock® - Box - Yellow

ACCESSORIES

61465 Charge cradle

61469 120V AC bank charger



STYLUS & SPECIALTY SERIES //

REDEFINING PORTABLE LIGHTING

**YOUR JOB HAS CHANGED, BUT THE NEED FOR SMALL,
VERSATILE AND EFFECTIVE LIGHTING HASN'T.**

We pride ourselves on identifying a need and building a product to suit it. Our Stylus is exactly one of those products. Small, compact, a long runtime and easily stowed. It's been seen just about everywhere from garages to TSA lanes. It's evolved into a full family of Stylus products with unique attributes that make them extra functional and suited for a variety of tasks. Same with our namesake Twin-Task and Task-Light lines.



STYLUS®

STYLUS PRO®

STYLUS PRO® COB

MACROSTREAM®

STYLUS PRO REACH®

STREAMLIGHT JR. F-STOP®

KEYMATE® USB

STREAMLIGHT MICROSTREAM/MACROSTREAM SERIES



MICROSTREAM®

High-powered ultra-compact lithium ion battery-powered flashlight. It fits in the palm of your hand or comfortably in your pocket and provides unparalleled performance for its size. Durable aluminum construction; IPX4 water-resistant.

MICROSTREAM

BATTERY: [1] "AAA" alkaline

SIZE: 3.5" x .6" (9.15 x 1.5 cm)

WEIGHT: 1.10 oz (31.2 g)

COLOR: Matte Black or Red

66318 White LED — Black

66323 White LED — Red

LUMENS:	45
CANDELA:	420
DISTANCE:	41m
RUN TIME:	2h 15m



MICROSTREAM® USB

This compact USB lithium ion battery powered flashlight features a tail cap switch, momentary or constant on operation, high and low beams, a combination pocket/hat clip for convenience, and amazing brightness and run time for a light of its size. The aluminum housing with Type II Military Spec anodizing helps make the light extremely durable and abrasion resistant. To charge the light, slide the head cover forward to expose the micro USB port.

MICROSTREAM USB

BATTERY: Li-Ion rechargeable

SIZE: 3.87" x .61" (98.2 x 15.6 cm)

WEIGHT: 1.2 oz (34.1 g)

COLOR: Black, Red, Blue or Coyote

66601	includes wrist lanyard, hat clip and USB cord - Clam - Black
66604	includes wrist lanyard, hat clip and USB cord - Box - Black
66602	includes wrist lanyard, hat clip and USB cord - Clam - Red
66605	includes wrist lanyard, hat clip and USB cord - Box - Red
66603	includes wrist lanyard, hat clip and USB cord - Clam - Blue
66606	includes wrist lanyard, hat clip and USB cord - Box - Blue
66608	includes wrist lanyard, hat clip and USB cord - Clam - Coyote
66609	includes wrist lanyard, hat clip and USB cord - Box - Coyote

ACCESSORIES

22070	40" USB Cord
22081	22" USB Cord
66607	MicroStream USB Battery
22600	EPU-5200™ Portable USB Charger

	HIGH	LOW
LUMENS:	250	50
CANDELA:	1,150	250
DISTANCE:	68m	31m
RUN TIME:	1h 30m	3h 30m



Sliding metal sleeve protects micro USB port



THE MACROSTREAM USB
ULTRA-COMPACT SIZE
MEETS UNPARALLELED
PERFORMANCE.

MACROSTREAM® USB

High-powered ultra-compact lithium ion battery-powered flashlight. It fits in the palm of your hand or comfortably in your pocket and provides unparalleled performance for its size. Durable aluminum construction; IPX4 water-resistant.

MACROSTREAM USB

BATTERY: Li-Ion rechargeable
SIZE: 4.50" x .83" (11.43 x 2.1 cm)
WEIGHT: 2.2 oz (62.4 g)
COLOR: Black

	HIGH	LOW
LUMENS:	500	50
CANDELA:	2,000	220
DISTANCE:	90m	30m
RUN TIME:	2h	8h

66320 includes wrist lanyard and USB cord - Box - Black



Metal sleeve protects charge port; slide sleeve forward to reveal charge port

Clip onto brim of hat for hands-free use

STREAMLIGHT
STYLUS SERIES



THE STYLUS PRO SERIES
MORE OPTIONS
TO USE IN EVEN MORE
PLACES & WAYS!



	HIGH	LOW
LUMENS:	350	90
CANDELA:	2,950	840
DISTANCE:	109m	58m
RUN TIME:	1h 30m	3h 30m



UPGRADED

Sliding metal sleeve protects micro USB port

STYLUS PRO® USB

You won't want to be without this sleek, compact penlight that recharges at any USB port or with optional AC wall adaptor. Consistent light output throughout battery life. IPX4 water-resistant. 1 meter impact-resistance tested.

STYLUS PRO USB

BATTERY: Lithium ion

SIZE: 5.95" x .63" (15.1 x 1.6 cm)

WEIGHT: 1.8 oz (51 g)

COLOR: Black

66133 120V AC adapter, USB cord, nylon holster — Black

66134 USB cord, nylon holster— Black

ACCESSORIES

22070 USB Cord

22071 120V AC USB Cord

66029 Nylon Holster

STYLUS PRO®

Compact size, durable construction and optimum beam output make this an ideal light for multiple tasks. Unbreakable lens. O-ring sealed. IPX4 rated for water-resistance. 1 meter impact-resistance tested. Removable pocket clip.

STYLUS PRO

BATTERY: (2) "AAA" alkaline

SIZE: 5.3" x .6" (13.4 x 1.5 cm)

WEIGHT: 1.64 oz (46.9 g)

COLOR: Matte Black, Silver, Red, Blue, Lime Green, Orange or RealTree Edge™

66118 White LED — Matte Black

66121 White LED — Silver

66120 White LED — Red

66122 White LED — Blue

66129 White LED — Lime Green

66128 White LED — Orange

66124 Green LED — RealTree Edge™

ACCESSORIES

66028 Nylon Holster



	WHITE LED	GREEN LED
LUMENS:	100	5
CANDELA:	950	73
DISTANCE:	62m	17m
RUN TIME:	8h	11h



UV LED OUTPUT: 250mW

UV RUN TIME: 2h 30m



UPGRADED

Sliding metal sleeve protects micro USB port

STYLUS PRO® USB UV

The Stylus Pro USB UV features a 400nm UV LED that is ideal for HVAC leak detection, forensic investigations or identifying fraudulent documents.

STYLUS PRO USB UV

BATTERY: Lithium ion

SIZE: 5.95" x .63" (15.1 x 1.6 cm)

WEIGHT: 1.8 oz (51 g)

COLOR: Black

66148 120V AC adapter, USB cord, nylon holster

66149 USB cord, nylon holster

ACCESSORIES

22070 USB Cord

22071 120V AC USB Cord

66029 Nylon Holster

STREAMLIGHT STYLUS SERIES



STYLUS PRO® COB

A sleek, compact, USB rechargeable worklight that you can wear. Clip it to your pocket for hands-free lighting. Don't have a pocket? Stick it to a steel surface using its integrated magnet. Slim profile fits into tight spaces to flood the work area with light.

STYLUS PRO COB

BATTERY: Lithium ion

SIZE: 6.64" x .55" (168.6 x 14 mm)

WEIGHT: 2.2 OZ (62.4 g)

COLOR: Black, Red or Blue

66700 includes pocket clip and USB cord - Clam - Black

66702 includes pocket clip and USB cord - Box - Black

66703 includes pocket clip and USB cord - Clam - Red

66705 includes pocket clip and USB cord - Box - Red

66706 includes pocket clip and USB cord - Clam - Blue

66708 includes pocket clip and USB cord - Box - Blue

ACCESSORIES

66143 Lithium Ion Battery (Stylus Pro USB/COB)

22070 40" USB Cord

22071 120V AC USB Cord

22081 22" USB Cord

22059 International Wall Adapter

22069 12V DC USB Adapter

22600 EPU-5200

66029 Nylon Holster



COB LED floods work area with bright, diffused light

Integrated magnet for hands-free use



Push-button switch with charge indicator
Red = charging
Green = charged

	HIGH	LOW
LUMENS:	160	40
CANDELA:	130	30
DISTANCE:	23m	11m
RUN TIME:	3h	8h 30m

Flash mode: 7 hours of run time

STYLUS PRO® 360

Versatile light functions as a typical Stylus Pro or adjust the head to reveal the 360° feature. Equipped with a rubber tail boot that allows the light to stand upright. It features a tail cap switch, momentary or constant on operation, a pocket clip for convenience, and amazing brightness and run time for a light of its size and price.

STYLUS PRO 360

BATTERY: (2) "AAA" alkaline

SIZE: 5.9" x .64" (150 x 16.25 cm)

WEIGHT: 1.9 OZ (53.8 g)

COLOR: Black

66218 Stylus Pro 360—Black

LUMENS: 65
CANDELA: 430
DISTANCE: 41m
RUN TIME: 6h 30m



Rubber tail boot allows the light to stand upright

The 360° feature allows the light to be used as a small lantern



STYLUS®

This bright, long-running LED penlight has a long battery life, and goes anywhere you need it. IPX4 rated for water-resistance. Removable pocket clip.

STYLUS

BATTERY: (3) "AAAA" alkaline

SIZE: 6.21" x .375" (15.17 x .95 cm)

WEIGHT: 1.1 OZ (31.19 g)

COLOR: Black, Gold, Silver, US Flag, Red or Blue

65006	Red LED—Black
65012	White LED—Silver
65018	White LED—Black
65020	Green LED—Black
65022	Blue LED—Black
65024	White LED—Gold
65035	White LED—Red
65050	White LED—Blue
65058	White LED—Black, UL Listed

ACCESSORIES

65030	AAAA Batteries—6 Pack
65905	Holster
72024	Lanyard with Push Button Slide
65031	Glare Guard



Intrinsic Safety for Haz. Loc.
Class I, Div. 1,
Groups A, B, C, D, T3C
"Classified"



Intrinsic Safety for Haz. Loc.
Class I, Div. 1,
Groups A, B, C, D, T3C
"Exia"

**SAFETY RATED
MODEL OFFERED**

LED COLOR:	WHITE	GREEN	BLUE	RED
LUMENS:	11	7	2	2
CANDELA:	140	59	110	53
DISTANCE:	24m	15m	21m	15m
RUN TIME:	24h	24h	24h	24h



SAFETY RATED MODEL OFFERED



STYLUS® UV

An ultraviolet penlight for fluorescent detection of fraudulent documents and for use in forensic investigations. IPX4 rated for water-resistance. Removable pocket clip.

STYLUS UV

BATTERY: (3) "AAAA" alkaline

SIZE: 6.21" x .375" (15.17 x .95 cm)

WEIGHT: 1.1 OZ (31.19 g)

COLOR: Black

65069	365nm UV LED—Black
-------	--------------------

ACCESSORIES

65030	AAAA Batteries—6 Pack
65905	Holster

OUTPUT:	3.8 mW
RUN TIME:	60h



THE STYLUS SERIES ELIMINATES
**HARD-TO-SEE
NOOKS AND CRANNIES
AND LIGHTS THE WAY.**

STYLUS REACH®

LUMENS:	11
CANDELA:	140
DISTANCE:	24m
RUN TIME:	24h

Twist and turn the flexible cable into any position to light the most out-of-the-way places.



Features a high-intensity white LED and a 7" cable (providing 14" of reach) that allows you to see into the tightest spots. IPX4 rated for water-resistance. Pocket clip.

STYLUS REACH

BATTERY: (3) "AAAA" alkaline

SIZE: 14" x .375"
(35.6 x .95 cm)

WEIGHT: 1.7 oz (48.2 g)

COLOR: Black or Silver

*SAFETY RATED
MODEL OFFERED*

65618	White LED—Black
65658	White LED—UL Listed Black
65612	White LED—Silver

ACCESSORIES

65030	AAAA Batteries—6 Pack
-------	-----------------------



STYLUS REACH® 18

LUMENS:	11
CANDELA:	140
DISTANCE:	24m
RUN TIME:	24h



A textured grip for non-slip handling makes it easier to maneuver the light in slippery or wet conditions.

All the great features of the Stylus Reach® with a longer cable. With a total of 25" of reach, nothing is out of sight. IPX4 rated for water-resistance. Pocket clip.

STYLUS REACH 18

BATTERY: (3) "AAAA" alkaline

SIZE: 25" x .375"
(64 x .95 cm)

WEIGHT: 3.5 oz (99.2 g)

COLOR: Black

65418	White LED—18" Cable—Black
-------	---------------------------

ACCESSORIES

65030	AAAA Batteries—6 Pack
-------	-----------------------



*SAFETY RATED
MODEL OFFERED*



Intrinsic Safety for Haz. Loc.
Class I, Div. 1,
Groups A, B, C, D, T3C
"Classified"



Intrinsic Safety for Haz. Loc.
Class I, Div. 1,
Groups A, B, C, D, T3C
"Exia"



STYLUS PRO REACH®

We added an 8" PVC cable for extended reach and flexibility to our powerful Stylus Pro® penlight. It now provides 14" of reach to get intense light right where you need it. Unbreakable, scratch-resistant lens. O-ring sealed, shock-proof and drop-tested. IPX4 rated water-resistant. Removable pocket clip.

STYLUS PRO REACH

BATTERY: [2] "AAA" alkaline

SIZE: 14.6" x .6"
(37.1 x 1.5 cm)

WEIGHT: 2.7 oz (76.5 g)

COLOR: Matte Black

LUMENS:	38
CANDELA:	825
DISTANCE:	57m
RUN TIME:	8h

A textured grip for non-slip handling makes it easier to maneuver the light in slippery or wet conditions.



Magnetic clip holder

66418 White LED includes Clip Holder — Matte Black

STREAMLIGHT
TWIN-TASK SERIES



TWIN-TASK® 3C



CHOOSE
FROM SPOT,
SPOT/FLOOD,
OR FLOOD

	SPOT	SPOT/FLOOD	FLOOD
LUMENS:	435	190	95
CANDELA:	6,600	1,500	70
DISTANCE:	162m	77m	17m
RUN TIME:	16h	19h	46h

The Twin-Task® 3C flashlight features three lighting modes. High, Low and Flood using the latest in COB LED technology. The power LED with its textured reflector provides an even beam, along with a piercing hotspot for distance. The Flood LED provides smooth even area lighting for your up close tasks with extended run time. Packaged with a high-strength lanyard.

TWIN-TASK 3C

BATTERY: [3] "C" alkaline
SIZE: 8.93" x 1.57" x 1.26"
(22.7 x 4.0 x 3.2 cm)
WEIGHT: 14.6 oz (414 g)
COLOR: Matte Black

51039	Matte Black - Box
51047	Matte Black - Clam

TWIN-TASK® 3AA



CHOOSE
FROM SPOT,
SPOT/FLOOD,
OR FLOOD

	SPOT	SPOT/FLOOD	FLOOD
LUMENS:	270	240	75
CANDELA:	3,680	3,000	60
DISTANCE:	121m	110m	15m
RUN TIME:	11h	12h	25h

The Twin-Task® 3AA flashlight features three lighting modes. High, Low and Flood using the latest in COB LED technology. The power LED with its textured reflector provides an even beam, along with a piercing hotspot for distance. The Flood LED provides smooth even area lighting for your up close tasks with extended run time. Packaged with a high-strength lanyard.

TWIN-TASK 3AA

BATTERY: [3] "AA" alkaline
SIZE: 8.75" x 1.33" x .79"
(22.22 x 3.38 x 2.0 cm)
WEIGHT: 7.1 oz (201 g)
COLOR: Matte Black

51038	Alkaline batteries. Matte Black - Box
51060	Alkaline batteries. Matte Black - Clam

THEY'RE CALLED TWIN-TASK, BUT THESE LIGHTS ARE SO VERSATILE, THEY SHOULD BE CALLED... **ANY-TASK.**

TWIN-TASK® 1L TWIN-TASK® 2L



TWIN-TASK 1L	SPOT	SPOT/FLOOD	FLOOD
LUMENS:	240	200	60
CANDELA:	3,650	2,700	40
DISTANCE:	121m	104m	13m
RUN TIME:	2h 30m	4h	5h 45m

CHOOSE
FROM SPOT,
SPOT/FLOOD,
OR FLOOD



TWIN-TASK 2L	SPOT	SPOT/FLOOD	FLOOD
LUMENS:	350	230	75
CANDELA:	4,900	2,580	60
DISTANCE:	140m	102m	15m
RUN TIME:	4h 45m	5h 45m	9h 45m

The Twin-Task® 1L and 2L flashlights feature three lighting modes. High, Low and Flood using the latest in COB LED technology. The power LED with its textured reflector provides an even beam, along with a piercing hotspot for distance. The Flood LED provides smooth even area lighting for your up close tasks with extended run time. Packaged with a high-strength lanyard.

TWIN-TASK 1L

BATTERY: (1) 3V "CR123A" lithium

SIZE: 4.24" x 1.33" x .98"
(10.77 x 3.38 x 2.49 cm)

WEIGHT: 4.2 oz (119 g)

COLOR: Matte Black

TWIN-TASK 2L

BATTERY: (2) 3V "CR123A" lithium

SIZE: 5.67" x 1.33" x .98"
(14.40 x 3.38 x 2.49 cm)

WEIGHT: 5.7 oz (162 g)

COLOR: Matte Black

TT-1L

51036 51037 Lithium battery. Matte Black - Box

51048 51049 Lithium battery. Matte Black - Clam

TWIN-TASK® 3AAA



CHOOSE
FROM SPOT,
SPOT/FLOOD,
OR FLOOD

	SPOT	SPOT/FLOOD	FLOOD
LUMENS:	240	165	60
CANDELA:	4,200	2,000	50
DISTANCE:	130m	89m	14m
RUN TIME:	3h 30m	3h 15m	11h

The Twin-Task® 3AAA flashlight features three lighting modes. High, Low and Flood using the latest in COB LED technology. The power LED with its textured reflector provides an even beam, along with a piercing hotspot for distance. The Flood LED provides smooth even area lighting for your up close tasks with extended run time. Packaged with a high-strength lanyard.

TWIN-TASK 3AAA

BATTERY: (3) "AAA" alkaline

SIZE: 5.45" x 1.57" x 1.18"
(13.84 x 3.99 x 3.0 cm)

WEIGHT: 7.0 oz (198 g)

COLOR: Matte Black

51052 Alkaline batteries. Matte Black - Box

51050 Alkaline batteries. Matte Black - Clam

TWIN-TASK® 3C-UV



CHOOSE FROM:
POWER LED,
6 UV LEDS
OR 3 UV LEDS.



	POWER LED	6 UV LED	3 UV LED
LUMENS:	185	40mw	30mw
CANDELA:	3,730	—	—
DISTANCE:	116m	—	—
RUN TIME:	27h	63h	81h

Three lighting modes include ultraviolet light for detection of fraudulent documents or engine and HVAC leaks. The white LED mode provides an even beam with a piercing hotspot for distance. Unbreakable lens. IPX4 rated for water-resistance. O-ring sealed. 1 meter impact-resistance tested.

TWIN-TASK 3C UV LED

BATTERY: (3) "C" alkaline
SIZE: 9.02" x 1.68" x 1.26"
(22.9 x 4.26 x 3.2 cm)
WEIGHT: 1 lb (449 g)
COLOR: Matte Black

51045 Matte Black.

TWIN-TASK® 3AAA LASER



CHOOSE FROM:
POWER LED,
5 LEDS OR
LASER.



	POWER LED	5 LED
LUMENS:	100	68
CANDELA:	2,000	800
DISTANCE:	90m	57m
RUN TIME:	2h 45m	5h 15m

Features a mode with piercing brightness and a hotspot for distance, plus a mode for ultra-bright area lighting and extended runtime. Also includes a red laser pointer. Unbreakable lens. IPX4 rated for water-resistance. O-ring sealed. 1 meter impact-resistance tested.

TWIN-TASK 3AAA LASER LED

BATTERY: (3) "AAA" alkaline
SIZE: 5.38" x 1.57" x 1.17"
(13.69 x 3.98 x 2.98 cm)
WEIGHT: 7.04 OZ (200 g)
COLOR: Matte Black

51043 Alkaline batteries. Matte Black.

TASK-LIGHT® 3AA

The long life of an LED with the longer range and brighter beam of a conventional high-powered light. Unbreakable lens. O-ring sealed for water-resistance. Drop-tested.

TASK-LIGHT 3AA

BATTERY: (3) "AA" alkaline
SIZE: 8.60" x 1.33" x .79"
(21.7 x 3.38 x 2.01 cm)
WEIGHT: 6.4 OZ (180 g)
COLOR: Matte Black or Titanium

51006 Alkaline batteries. Matte Black.
51016 Alkaline batteries. Titanium.



LUMENS:	95
CANDELA:	1,600
RUN TIME:	16h

SPECIALIZED TECHNOLOGY FOR SPECIALIZED JOBS.

NIGHT COM® LED

Choose from 3 lighting options: power LED for extreme brightness, night vision protection that meets or exceeds MIL-14720, or ultra-bright red for use when night vision preservation is not needed. Unbreakable lens. O-ring sealed for weather resistance. Drop-tested.

NIGHT COM LED

BATTERY: (2) 3V "CR123A" lithium
SIZE: 5.43" x 1.33" x .98"
 (13.79 x 3.38 x 2.49 cm)
WEIGHT: 5.44 oz (152 g)
COLOR: Matte Black

51056 Lithium batteries. Red LEDs. Matte Black.



	WHITE LED	RED LED
LUMENS:	105	2.5
CANDELA:	4,500	—
RUN TIME:	3h 30m	28h

LED - Indicator Type: Preserves complete dark adaptation per MIL-14720 (<0.05 lumens)

Three Modes:



1 INDICATOR LED	2 RED LEDs	POWER LED
Run Time 130 hours	Run Time 28 hours	Run Time 3.5 hours

NIGHT COM® UV

Choose a far-reaching, bright, white light or an ultraviolet light for detection of fraudulent documents and detecting engine/HVAC leaks. Unbreakable lens. IPX4 rated for water-resistance. 1 meter impact-resistance tested.

NIGHT COM UV

BATTERY: (2) 3V "CR123A" lithium
SIZE: 5.40" x 1.33" x .98"
 (13.7 x 3.39 x 2.49 cm)
WEIGHT: 5.44 oz (152 g)
COLOR: Matte Black

51046 Lithium batteries. Matte Black.



	HIGH LED	LOW LED
LUMENS:	115	50
CANDELA:	4,200	1,600
DISTANCE:	130m	80m
RUN TIME:	4h 15m	13h 30m

UV LEDs: 10 Hours of continuous run time

Three Modes:



HIGH LED	LOW LED	6 UV LEDs
50,000 hour lifetime	50,000 hour lifetime	(3) 365nm UV LEDs (3) 390nm UV LEDs

MULTI OPS®

An ultra-bright white light, or (5) UV LEDs for fluid detection, and a laser pointer all in one. IPX4 rated for water-resistance. All openings are O-ring or gasket sealed. 1 meter impact-resistance tested.

MULTI-OPS

BATTERY: (3) "AAA" alkaline
SIZE: 5.38" x 1.57" x 1.17"
 (13.69 x 3.98 x 2.98 cm)
WEIGHT: 7.04 oz (200 g)
COLOR: Matte Black

51072 Alkaline batteries. Matte Black.



LUMENS:	50
CANDELA:	2,500
DISTANCE:	100m
RUN TIME:	4h 45m

LASER OUTPUT: Useable laser range of 100+ feet when in LED/laser mode, and 100+ yards when in laser only mode.

White LED + UV LEDs: 4 Hours of continuous run time
 White LED + Laser: 4 Hours of continuous run time
 UV LEDs: 10 Hours of continuous run time
 Laser only: 40 Hours of continuous run time



STREAMLIGHT JR. F-STOP®

Ultra-compact lightweight 2AA flashlight features a power LED and Spot to Flood technology! This feature makes the light very versatile for every lighting need. With the bezel forward (for Spot mode) the light has a piercing beam. When the bezel is slid backwards, the beam opens up into a smooth flood pattern for area lighting.

STREAMLIGHT JR. F-STOP

BATTERY: Two (2) "AA" size, Alkaline or Lithium batteries.

SIZE: 6.5" x 1.12" x .75"
(16.51 x 2.84 x 1.90 cm)

WEIGHT: 4.4 oz (125 g)

COLOR: Black, Red or Blue

71700	Black, includes holster and (2) alkaline batteries—clam
71701	Black, includes holster and (2) alkaline batteries—box
71702	Red, includes holster and (2) alkaline batteries—clam
71703	Red, includes holster and (2) alkaline batteries—box
71704	Blue, includes holster and (2) alkaline batteries—clam
71705	Blue, includes holster and (2) alkaline batteries—box

ACCESSORIES

71503	Nylon Holster
99075	Rubber helmet strap



SPOT



FLOOD

	SPOT	FLOOD
LUMENS:	220	250
CANDELA:	5,600	360
DISTANCE:	150m	38m
RUN TIME:	6h	6h

With the bezel forward (for Spot mode) the light has a piercing beam. When the bezel is slid backwards, the beam opens up into a smooth flood pattern for area lighting.

THE LIGHT SEEN IN EVERY TOOL BOX, IS THE LIGHT THAT CAN HELP YOU SEE ANYWHERE.

STREAMLIGHT JR.® LED

Cutting edge technology makes this lightweight flashlight super-bright and super-convenient. Unbreakable lens. Regulated light output throughout battery life. IPX4 rated for water-resistance. All openings are O-ring sealed. 1 meter impact-resistance tested.

STREAMLIGHT JR. LED

BATTERY: (2) "AA" alkaline or lithium

SIZE: 6.5" x 1.00" x .73"
(16.51 x 2.54 x 1.85 cm)

WEIGHT: 4.1 oz (117 g)

COLOR: Black

71500 Alkaline batteries. Black.

ACCESSORIES

71503 Nylon Holster

71510 Magnetic Clip Holder

99075 Rubber Helmet Strap

LUMENS:	225
CANDELA:	2,700
DISTANCE:	104m
RUN TIME:	6h



STREAMLIGHT JR.® REACH LED

With its flexible cable and magnetic clip, you can put this handy light anywhere and see anything. Unbreakable lens. IPX4 rated for water-resistance. All openings O-ring sealed. 1 meter impact-resistance tested.

STREAMLIGHT JR. REACH LED

BATTERY: (2) "AA" alkaline

SIZE: 20" x .8" x .73"
(50.8 x 2.03 x 1.85 cm)

WEIGHT: 6.1 oz (173 g)

COLOR: Black

LUMENS:	115
CANDELA:	1,500
DISTANCE:	77m
RUN TIME:	7h 30m




71600 Alkaline batteries. Black.

ACCESSORIES

71510 Magnetic Clip Holder

**STREAMLIGHT
POCKET LIGHT SERIES**

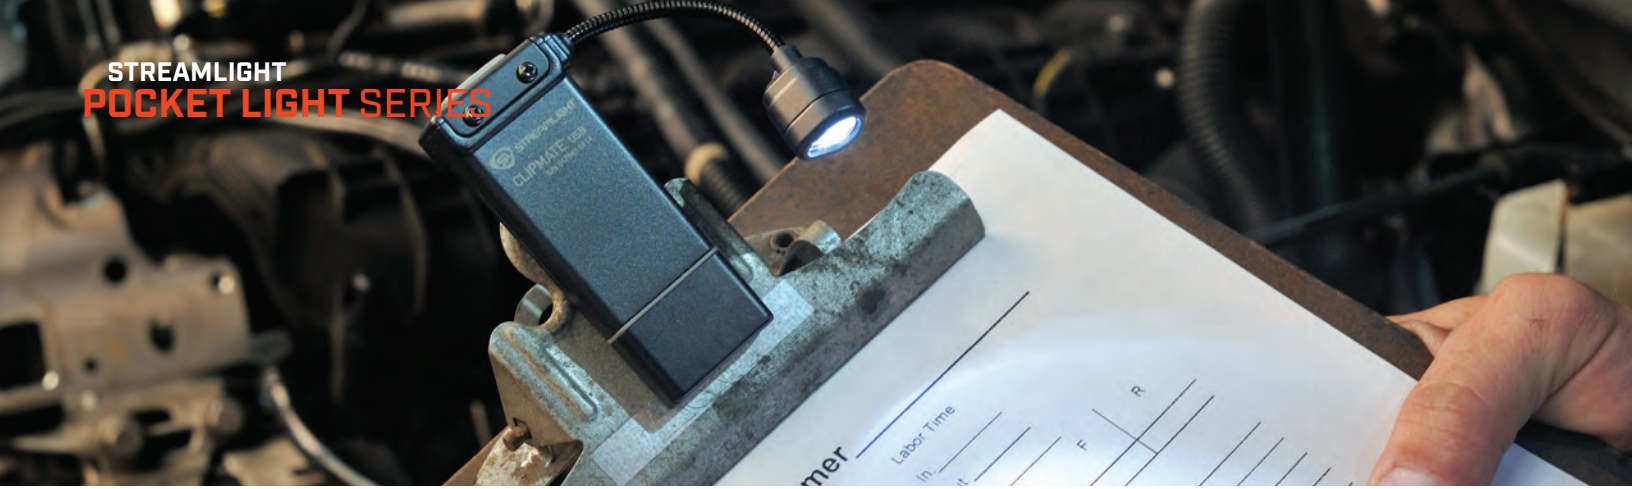

CLIPMATE® USB

This multi-function light clips to pocket or cap for hands-free use. Recharges by plugging into USB port or optional AC wall adaptor. IPX4 water-resistant. 1 meter impact-resistance tested.

CLIPMATE USB

BATTERY: Lithium polymer cell
SIZE: 3.20" x 1.39" x .65" (81 x 35 x 17 mm)
WEIGHT: 1.9 oz (53.8 g)
COLOR: Black

- 61125 Light only. Black.
- 61126 Light with 120V AC. Black.

ACCESSORIES

- 22070 USB Cord
- 22058 120V AC Wall Adapter
- 61128 Clipmate USB Battery

WHITE LED	HIGH	LOW	RED LED	HIGH	LOW
LUMENS:	70	10	LUMENS:	.5	.2
CANDELA:	500	50	CANDELA:	9	3
DISTANCE:	44m	14m	DISTANCE:	6m	3m
RUN TIME:	3h 30m	24h	RUN TIME:	16h	65h



Dual LEDs:
 High-intensity white LED
 Night vision red LED



Flexible, extension cable targets the beam where you need it



NANO LIGHT®

This tiny, weatherproof light has a non-rotating snap hook for easy one-handed operation when attached to a keychain.

NANO

BATTERY: [4] alkaline button cell
SIZE: 1.47" x .51" x .43" (3.73 x 1.3 x 1.09 cm)
WEIGHT: .36 oz (10 g)
COLOR: Black, Blue, Pink, or Red

For each color Nano Light sale, we donate \$1 to the organization associated with that light. Look below for information about each cause.

LUMENS:	10
RUN TIME:	8h



- 73001 Black with White LED
- 73002 COPS/Blue with White LED
- 73003 BCRF/Pink with White LED
- 73005 NFFF/Red with White LED
- 61205 4 pack coin cell Nano Light Batteries

SURE, THEY'RE CALLED POCKET LIGHTS

BUT REALLY THEY'RE GO-ANYWHERE, DO-ANYTHING LIGHTS.

KEYMATE® USB

This weather resistant, personal area light featuring a recessed button to prevent accidental turn on, a Lithium Polymer rechargeable battery and a low battery power warning indicator. It also includes a snap hook for attachment to a key ring, zipper pull, or ball cap.

KEYMATE USB

BATTERY: Lithium polymer cell

SIZE: 2.9" x 1.08" x .5" (7.3 x 2.74 x 1.27 cm)

WEIGHT: .5 OZ (14.2 g)

COLOR: Black



Bright white COB LED provides 35 lumens with optimal area illumination

WHITE LED	HIGH	LOW
LUMENS:	35	16
RUN TIME:	1h	2h

2 hours on Flash mode

Easily charge from your computer, USB port or EPU-5200 with the included USB cable.

73200 Keymate USB w/5" (12.7cm) USB Cord—Black

LUMENS: 27 (white)

RUN TIME: 40h



CLIPMATE®

Equipped with three high-intensity LEDs and an innovative 360° rotating head, this is one versatile little light. Includes integrated hat clip, elastic strap headband and lanyard.

CLIPMATE

BATTERY: (3) "AAA" alkaline

SIZE: 3.52" x .85" (8.94 x 2.16 cm)

WEIGHT: 2.4 OZ (66.7 g)

COLOR: Yellow with three white LEDs;
Black with a choice of white or green LEDs

61100 Yellow with White LEDs and alkaline batteries

61101 Black with White LEDs and alkaline batteries

61102 Black with Green LEDs and alkaline batteries

THE LOGO®

Weighs less than half an ounce and has 3 light levels plus a blink mode that will flash for 45 hours. To conserve battery, it automatically turns off after 6 minutes in high, medium or low modes. Weather-resistant. 1 meter impact-resistance tested.

THE LOGO

BATTERY: (2) 3V CR2016 lithium coin cell

SIZE: 1.8" x 1.2" x .37" (45.7 x 30.5 x 9.4 mm)

WEIGHT: .37 OZ (10.7 g)

COLOR: Black



WHITE LED	HIGH	MEDIUM	LOW
LUMENS:	10	5	2.5

45 hours on Blink mode

73100 The Logo—Black

STREAMLIGHT
LIGHTS FOR A CAUSE SERIES

STREAMLIGHT LIGHTS FOR A CAUSE

SUPPORTING THE THINGS THAT MATTER TO YOU.





The Breast Cancer Research Foundation® is an independent 501 (c) (3) not-for-profit organization whose mission is to advance the world's most promising research to eradicate breast cancer in our lifetime. For more information, visit www.bcrfcure.org.

By purchasing this product, you are helping to make a difference in the rebuilding of the lives of surviving families and affected co-workers of law enforcement officers killed in the line of duty. In addition to rebuilding lives, C.O.P.S. (Concerns of Police Survivors) provides training to law enforcement agencies on survivor victimization issues and educates the public of the need to support the law enforcement profession and its survivors. For more information, visit www.nationalcops.org.

Congress created the National Fallen Firefighters Foundation to lead a nationwide effort to honor America's fallen firefighters. Since 1992, the non-profit foundation has developed and expanded programs that fulfill that mandate. Their mission is to honor and remember America's fallen fire heroes and to provide resources to assist their survivors in rebuilding their lives. For more information, visit www.firehero.org.

STREAMLIGHT/BCRF PRODUCTS

- 73003 Nano-Pink with White LED
- 44944 Siege AA Lantern—Pink
- 74350 Strion with AC/12V DC—1 Holder-Pink

STREAMLIGHT/COPS PRODUCTS

- 73002 Nano-COPS/Blue with White LED
- 44949 Siege AA Lantern—Blue

STREAMLIGHT/NFFF PRODUCTS

- 73005 Nano-NFFF/Red with White LED
- 44953 Siege AA Lantern—Red
- 69157 Vantage LED Tactical Helmet Light-Red

SEE PAGE 160 FOR NANO LIGHTS THAT SUPPORT THESE GREAT CAUSES



SEE PAGE 47 FOR SIEGE AA LIGHTS THAT SUPPORT C.O.P.S.



SEE PAGE 54 FOR A VANTAGE THAT SUPPORTS THE NFFF

SEE PAGE 19 FOR A PINK STRION THAT SUPPORTS THE BCRF

For every colored Nano Light sold, we donate \$1 to the organization associated with that light.
 For every colored Siege AA sold, we donate \$2 to the organization associated with that light.
 For every pink Strion® LED sold, Streamlight will donate \$5 to the Breast Cancer Research Foundation.®
 For every red Vantage sold, Streamlight will donate \$3 to the National Fallen Firefighters Foundation.®



Streamlight, Inc.
30 Eagleville Road
Eagleville, PA U.S.A. 19403-3996

streamlight.com // streamlightgear.com
(800) 523-7488 Toll-Free
(800) 220-7007 Fax
(610) 631-0600
(610) 631-0712 Fax

